

Technical specifications


Alkaline

Powerline

Panasonic Typical Dimensions



LR20AD

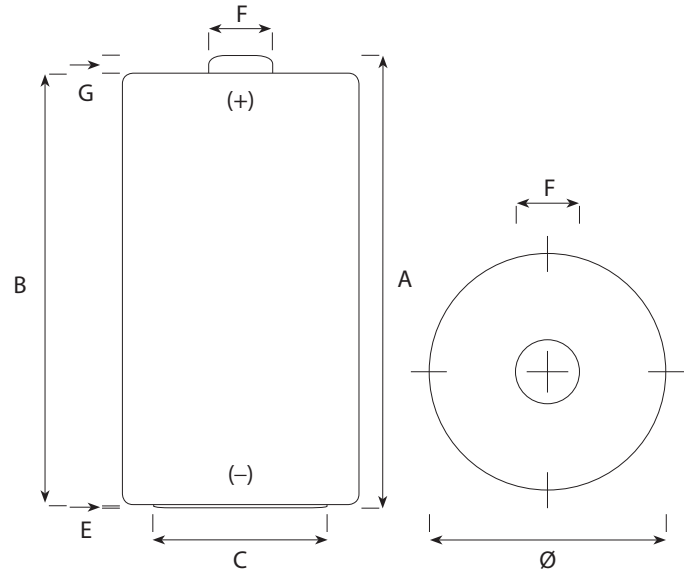

Dimension	IEC Dimensions (mm)		Panasonic Dimensions (mm)
	Maximum	Minimum	Typical
A	61,5		60,6
B		59,5	60,1
C		18,0	24,2
E	1,0		0,5
F	9,5		9,0
G		1,5	2,5
Ø	34,2	32,3	33,0

Specifications

Name	LR20 / XL / D / AM1 / MONO / MN1300 / 13A / 13AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	142,7 g
Storage temp. range	+10°C ~ +25°C
Operating temp. range	-20°C ~ +45°C
Average Impedance	+/- 90 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation Nordic ecolabeling (white Swan) EC directive 91/157EC & 98/101EC
Recommended cut off voltage	0,8V per cell






For more information:

www.panasonic-industrial.com

Panasonic
ideas for life

Typical discharge values

LR20AD

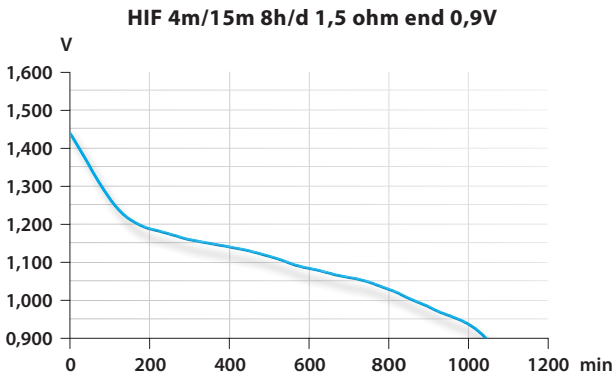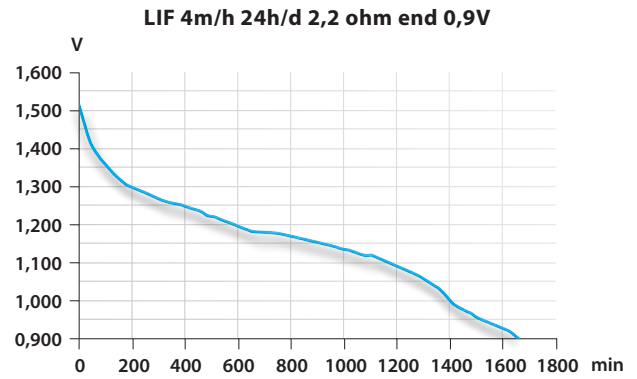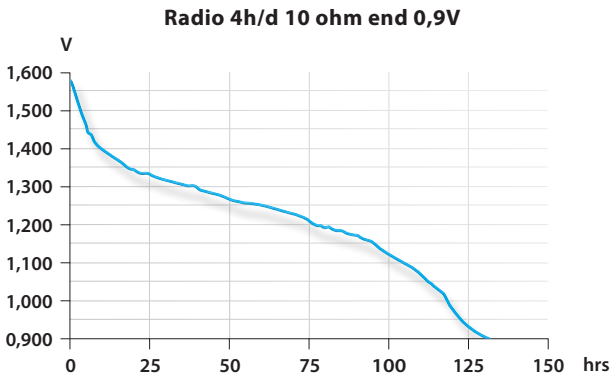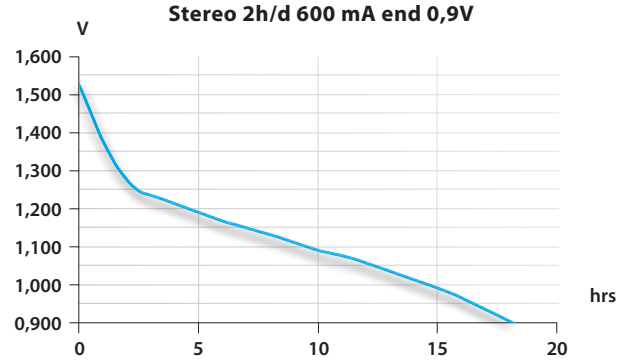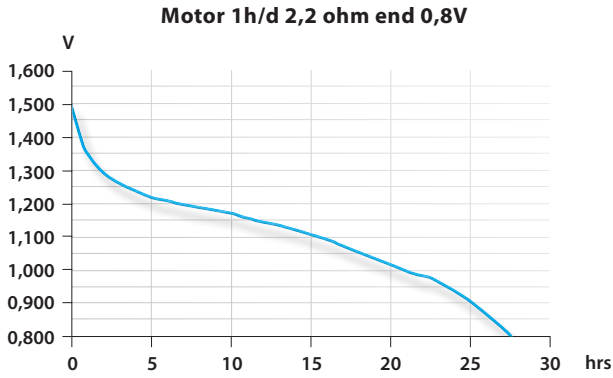

Copyright© Panasonic Battery Sales Europe ("PBSE") 2008 - All rights reserved. The information contained herein is believed to be correct. However no warranty is made, either expressed or implied regarding the accuracy or the results to be obtained from the use of such information. Test results are strictly according to IEC conditions. Capacities of batteries are depending on drain, temperature and cut-off voltage. Data are subject to change. 04/2008.

Promoter: Panasonic Battery Sales Europe N.V., J. Bogaerts, Brusselsesteenweg 502, 1731 Zellik, Belgium

For more information: www.panasonic-industrial.com