

# Eveready 1231


**6V**




**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)

**Designation:** ANSI / NEDA-918D, IEC-4R25-2  
**Battery Voltage:** 6 Volts  
**Average Weight:** 1,270 grams (44.7 oz.)  
**Volume:** 1,123 cubic centimeters (68.5 cubic inch)  
**Average Capacity:** 22 Ah to 3.2 volts  
 (Rated at 25mA continuous at 21°C)  
**Cells:** Eight No. 60 (size "F")  
 Two parallel strings of four in series  
**Jacket:** Metal

## Industry Standard Dimensions

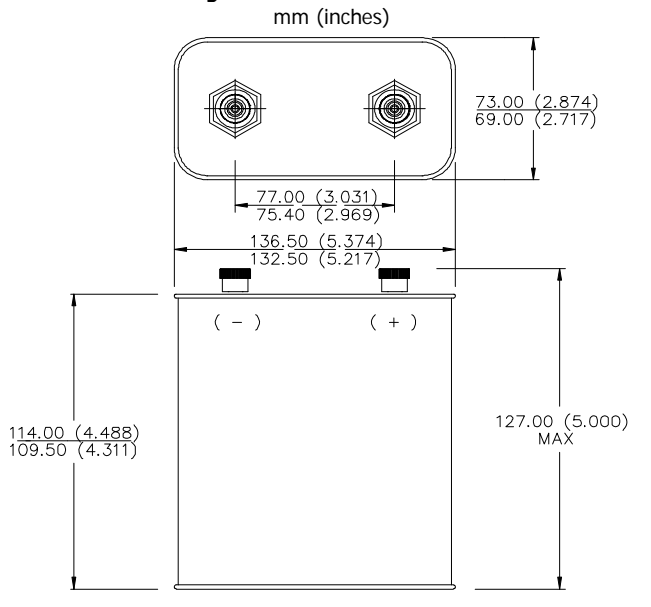

**TYPICAL DISCHARGE CURVE**  
Simulated Test @ 21°C (70°F)

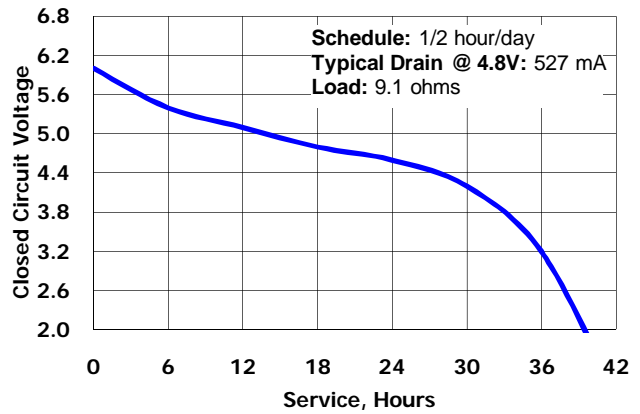

**Simulated Application Test**  
Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 4.8V (milliamperes)	Load (ohms)	Cutoff Voltage			
			2.6V	3.0V	3.2V	3.6V
1/2 hour/day	527	9.1	38	37	36	34
24 hours/day	527	9.1	35	31	29	25

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved