


# Energizer Rechargeable AAA-850 (HR03)

**AAA**




## Industry Standard Dimensions

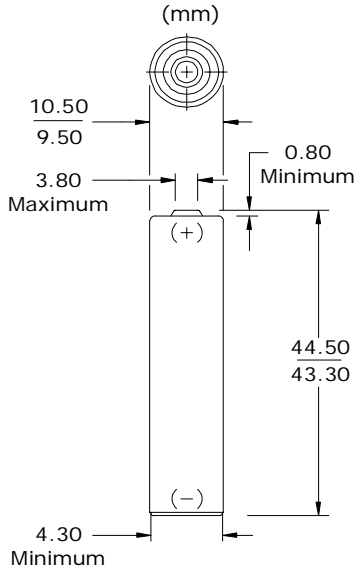


## Typical Discharge Characteristics

Typical Performance at 21°C

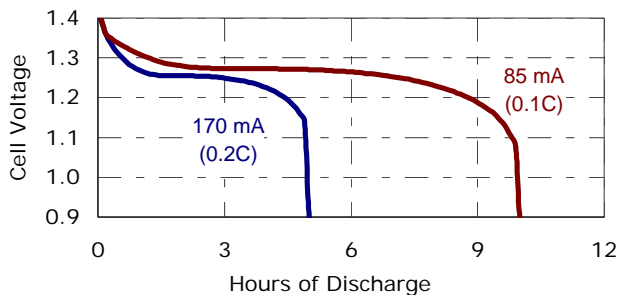

Typical Performance at 21°C

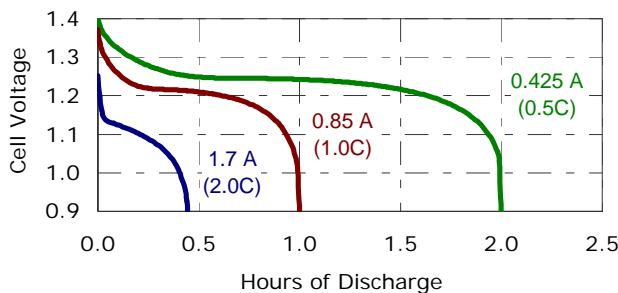

<b>Classification:</b>	ACCU Rechargeable
<b>Chemical System:</b>	Nickel-Metal Hydride (NiMH)
<b>Designation:</b>	IEC-HR03
<b>Nominal Voltage:</b>	1.2 Volts
<b>Rated Capacity:</b>	850 mAh (to 1.0 volts) Based on 170 mA (0.2C) discharge rate
<b>Typical Weight:</b>	12.0 grams
<b>Typical Volume:</b>	3.8 cubic centimeters
<b>Jacket:</b>	Plastic Label

### Internal Resistance:

The internal resistance of the cell varies with state of charge, as follows:

<u>Cell Charged</u>	<u>Cell 1/2 Discharged</u>
100 milliohms	120 milliohms
(tolerance of ±20% applies to above values)	

### AC Impedance (No Load):

The impedance of the charged cell varies with frequency, as follows:

<u>Frequency (Hz)</u>	<u>Impedance (milliohms)</u> (Charged Cell)
1000	35

Above values based on AC current set at 1.0 ampere. Value tolerances are ±20%.

### Operating and Storage Temperatures:

To maintain maximum performance, observe the following general guidelines regarding environmental conditions.

Charge:	0°C to 40°C
Discharge:	0°C to 50°C
Storage:	-20°C to 30°C
Humidity:	65±20%

Operating at extreme temperatures, will significantly impact battery cycle life.

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

©Energizer Holdings, Inc. - All Rights Reserved