




# Cadnica

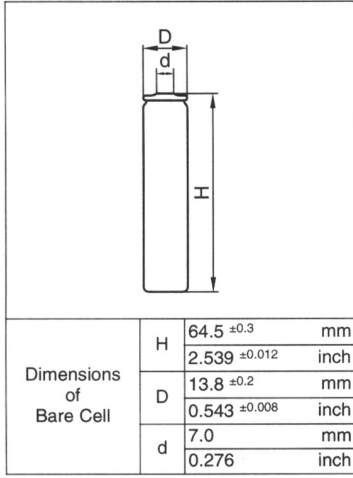


# Cell Type KR-1200AAE

## Specifications


Nominal Capacity		1200mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	120mA	
	Fast	1800mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0 to 45 °C [32 to 113 °F]
		Fast	0 to 45 °C [32 to 113 °F]
	Discharge	-20 to 60 °C [-4 to 140 °F]	
Storage		-30 to 50 °C [-22 to 122 °F]	
Internal Impedance(Av.) (at 50% discharge)		12mOhms (at 1000Hz)	
Weight		31g/1.09oz	
Dimensions(D)x(H) (with tube)		14.2 <sup>0</sup> <sub>-0.5</sub> x 65 <sup>0</sup> <sub>-2</sub> mm	
		0.56 <sup>0</sup> <sub>-0.02</sub> x 2.56 <sup>0</sup> <sub>-0.08</sub> inch	

## Typical Characteristics


### Charge

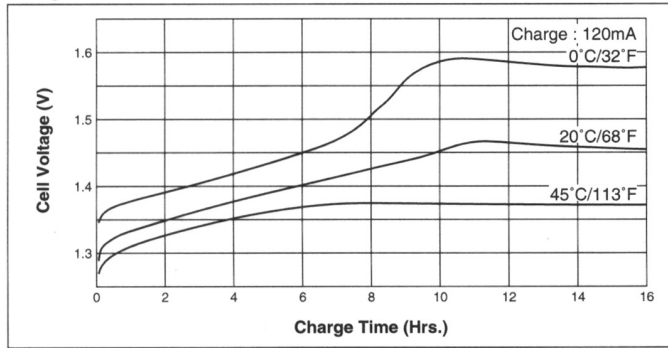


### Discharge (at high rate)

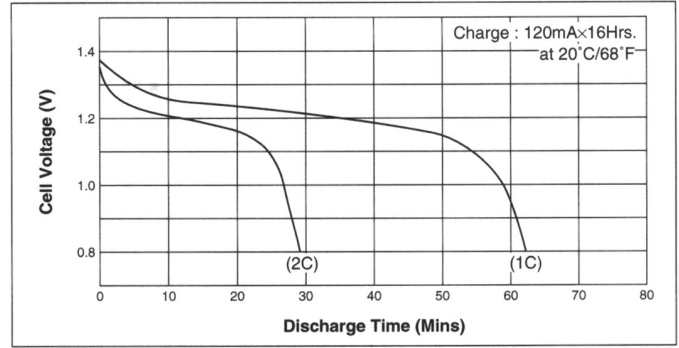


### Charge

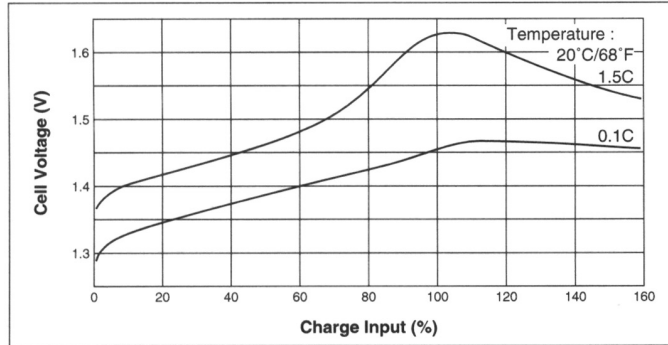

### Discharge (at high rate)

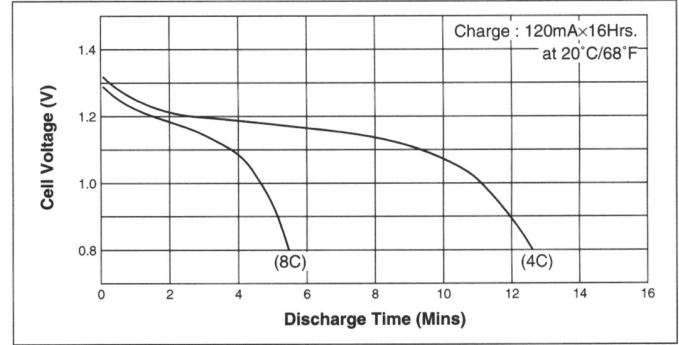

### Discharge (at low rate)

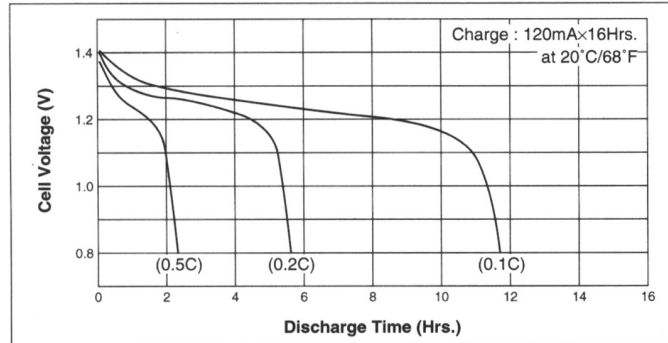

### Temperature (Charge & Discharge)

