


DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
564	A	RELEASED	HYO	3/24/00	JC	7/27/00	DJC	8/7/00
1892	B	UPDATE TO ROHS COMPLIANT	EO	03/15/06	HO	3/15/06	HO	3/15/06



RoHS Compliant

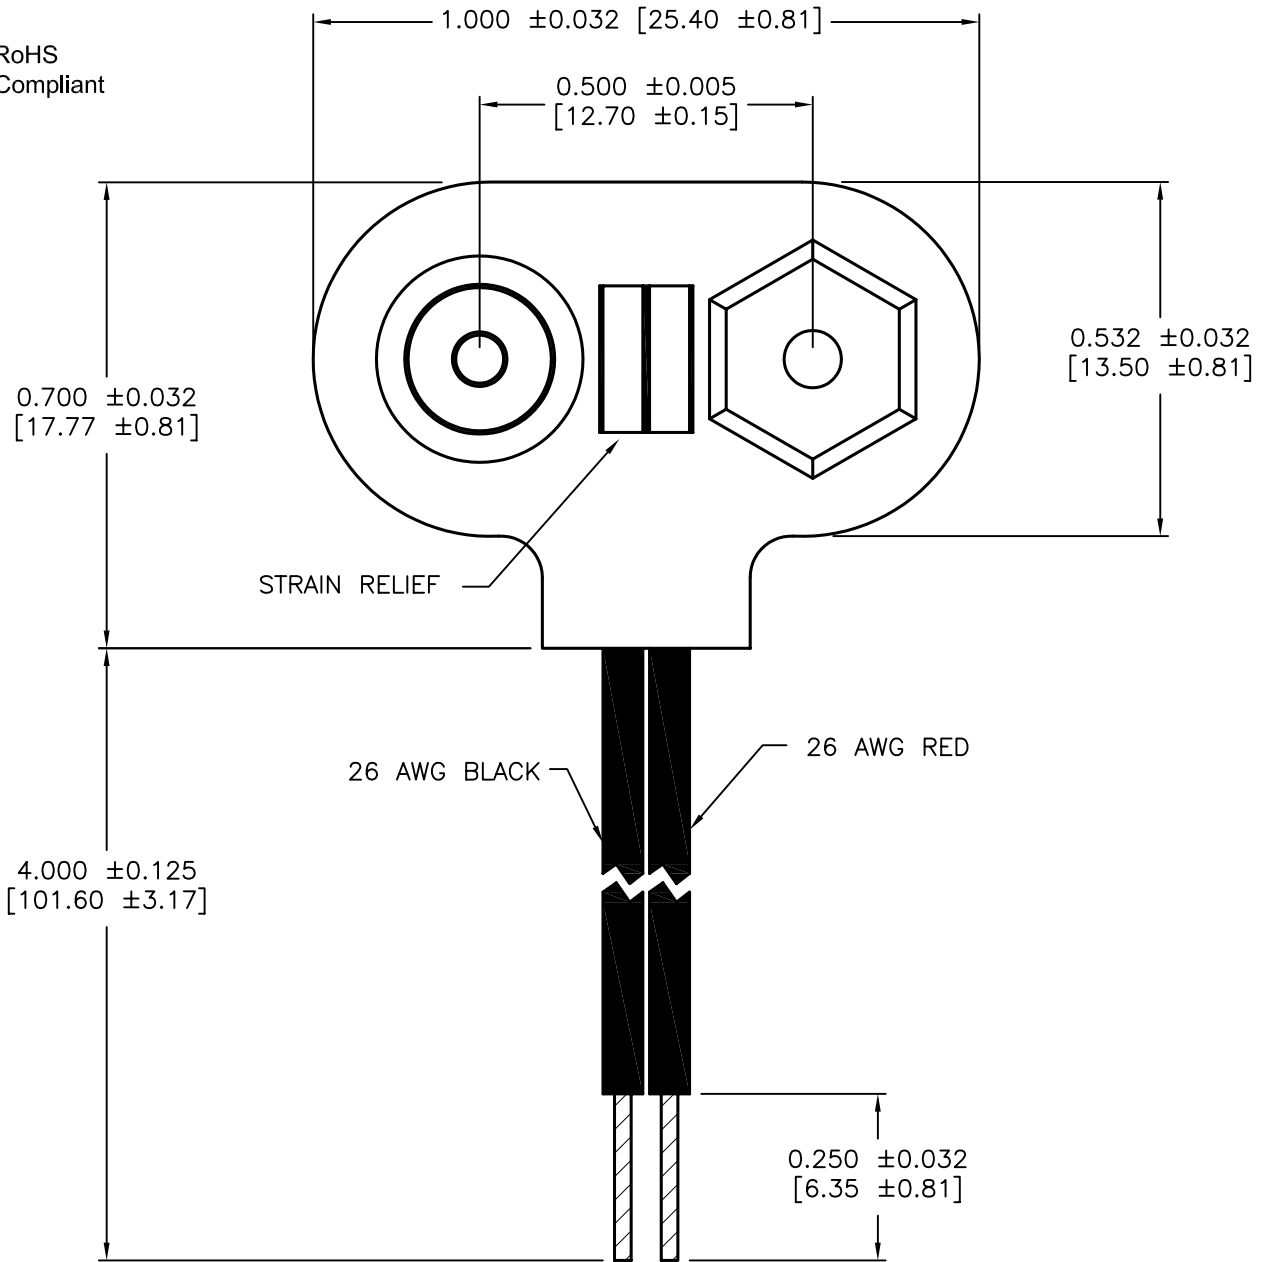

**Specifications:**

- 1- Wire: 26 AWG, 1007 UL/CSA approved
- 2- Contact: Brass, nickel plated, mounted on  
0.012 [0.30] Min. thickness PVC  
0.032 [0.81] thick fiber insulation
- 3- Red wire connected to female contact
- 4- Black wire connected to male contact.

SPC-F004.DWG

<p>TOLERANCES:</p> <p>UNLESS OTHERWISE SPECIFIED DECIMAL .XXX ± 0.015 [0.38]</p>	<p>DRAWN BY:</p> <p>HISHAM ODISH</p>	<p>DATE:</p> <p>3/24/00</p>	<p>DRAWING TITLE:</p> <p>ECONOMY 9 VOLT BATTERY STRAP</p>			
	<p>CHECKED BY:</p> <p>JOHN COLE</p>	<p>DATE:</p> <p>7/27/00</p>	<p>SIZE</p> <p>A</p>	<p>DWG. NO.</p> <p>8459-0676</p>	<p>ELECTRONIC FILE</p> <p>16N944.DWG</p>	<p>REV</p> <p>B</p>
	<p>APPROVED BY:</p> <p>DANIEL CAREY</p>	<p>DATE:</p> <p>8/7/00</p>	<p>SCALE: NTS</p>		<p>U.O.M.: INCHES [mm]</p>	<p>SHEET: 1 OF 1</p>

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.