




every 1000000

for industry and general applications

- Spring: steel, nickel-plated
- Contact: brass, nickel-plated
- Admissible ambient temperature -10°C to +60°C

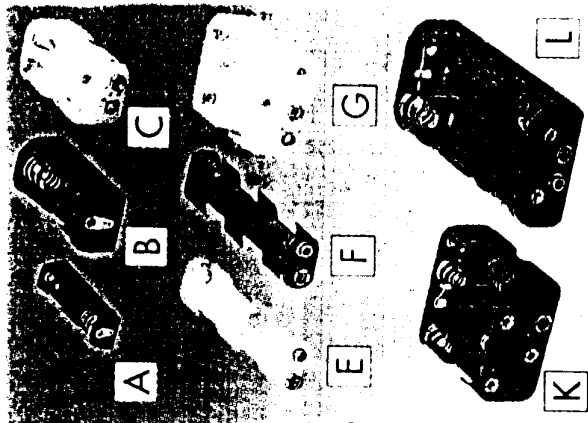

Model	Order No.	Figure	Size	Soldering Connections
A-300/IT	03.0010	A	1 x AA	yes
A-301/IT	03.0020	B	1 x D	yes
A-302	03.0030	C	4 x AA	-
A-302/IT	03.0040	D	4 x AA	-
A-303	03.0050	E	4 x AA	-
A-303/IT	03.0060	F	4 x AA	-
A-304	03.0070	G	6 x AA	-
A-304/IT	03.0080	H	6 x AA	-
A-305/IT	03.0100	K	8 x AA	-
A-306/IT	03.0110	L	4 x C	-
A-307/IT	03.0120	M	2 x AA	-
A-308/IT	03.0130	N	2 x C	-
A-309/IT	03.0140	O	4 x D	-
A-310/IT	03.1350	P	4 x AA	-
A-311/IT	03.1360	Q	4 x AA	-
A-312/IT	03.1700	R	1 x C	yes
A-339/GR	03.1520	S	9V battery or 2xAA	yes

MONACOR®