

CHEMTRONICS[®]

Technical Data Sheet

TDS # 7100

Electro-Wash[®] CZ Cleaner Degreaser

PRODUCT DESCRIPTION

Electro-Wash[®] CZ Cleaner Degreaser is an all purpose cleaner for electronics that is nonflammable, non-ozone depleting, and safe on plastics. This fast drying precision cleaner contains Chemtronics' Cirozane[™], which is based on new **HFE technology**. It is excellent for removing grease, oil, and flux residues from energized equipment.


- MIL-PRF-29608A (AS) Class C approved
- Removes dirt, oil, grease, flux and many other contaminants
- Nonflammable
- Excellent material compatibility
- Non-ozone depleting
- Leaves no residues
- Evaporates quickly
- Low Odor
- Contains no CFCs, HCFCs, or 1,1,1 Trichloroethane

TYPICAL APPLICATIONS

Electro-Wash[®] CZ Cleaner Degreaser is excellent for cleaning:

- Printed Circuit Boards
- Contacts
- Cable Assemblies
- Sensitive Plastic Surfaces
- Magnetic Heads
- Electronic Controls
- Edge Connectors
- Light Flux Residues

TYPICAL PRODUCT DATA AND PHYSICAL PROPERTIES

Boiling Point	90°F (Initial)	
Flash Point (TCC)	None to Boiling	
Solubility in Water	Negligible	
Specific Gravity @77°F	1.53	
Evaporation Rate (Butyl acetate=1)	>1	
Appearance	Clear, colorless liquid	
Odor	Slight Ethereal	
Surface Tension	11.6	
Kauri-Butanol (KB)	38	
Dielectric Breakdown (ASTM D-877)	17 kV	
VOC* Content:	<u>Aerosol</u>	<u>Liquid</u>
CARB	38%	100%
SCAQMD	187 g/L	373 g/L
Federal	13%	28%
RoHS Compliant		
Shelflife	Aerosols	5 years
	Liquids	2 years after opening

*Volatile Organic Compound (VOC) information is calculated on a weight basis using the VOC definition of California Air Resources Board (CARB) Consumer Product Regulations, South Coast Air Quality Management District (SCAQMD) Rule 102 and the Federal definition published in 40 CFR 51.100(s).

COMPATIBILITY

Electro-Wash[®] CZ Cleaner Degreaser is generally compatible with most materials used in the electronics industry. With any cleaning agent compatibility must be determined on a non-critical area prior to use.

ENVIRONMENTAL IMPACT DATA

HCFC-141b	None	HFC	Yes
HCFC-225	None	nPB	None

Hydrochlorofluorocarbons (HCFCs) are regulated under the Montreal Protocol as Class II ozone depleting substances. HCFC-141b is no longer produced in the US under this legislation. HCFC-225 is planned for production phase-out in 2015. Hydrofluorocarbons (HFCs) are not currently regulated.

EPA has listed n-propyl bromide (nPB) as an acceptable alternative to ozone depleting substances in metal, precision, and electronics cleaning under Section 612 of the Clean Air Act.

TECHNICAL & APPLICATION ASSISTANCE

ITW Chemtronics® provides a technical hotline to answer your technical and application related questions. The toll free number is: **1-800-TECH-401**.

NOTE:

This information is believed to be accurate. It is intended for professional end users having the skills to evaluate and use the data properly.

ITW CHEMTRONICS® does not guarantee the accuracy of the data and assumes no liability in connection with damages incurred while using it.

MANUFACTURED BY:

ITW CHEMTRONICS
8125 COBB CENTER DRIVE
KENNESAW, GA 30152
1-770-424-4888

REV. G (05/08)

Electro-Wash® and Chemtronics® are registered trademarks of ITW Chemtronics. All rights reserved.


Cirozane™, is a trademark of ITW Chemtronics. All rights reserved. All other trademarks herein are trademarks or registered trademarks of their respective owners.

<u>Material</u>	<u>Compatibility</u>
-----------------	----------------------

ABS	Excellent
Buna-N	Excellent
EPDM	Excellent
Graphite	Excellent
HDPE	Excellent
Kynar™	Excellent
LDPE	Excellent
Lexan™	Good
Neoprene	Excellent
Noryl®	Excellent
Nylon™ 66	Excellent
Cross-Linked PE	Excellent
Polypropylene	Excellent
Polystyrene	Good
PVC	Excellent
Silicone Rubber	Excellent
Teflon™	Excellent
Viton™	Excellent

COMPETITIVE ASSESSMENT

Milligrams of Multi-Purpose Oil Removed
Per Gram of Solvent

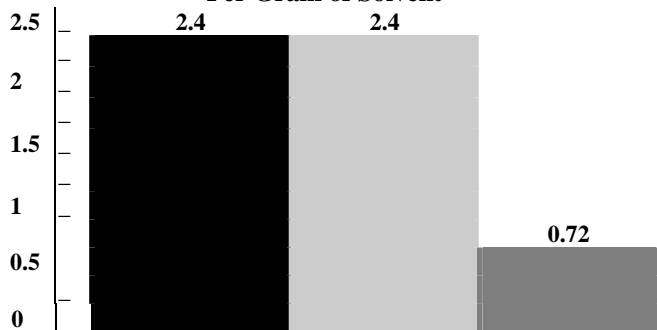

Electro-Wash® CZ Cleaner Degreaser	CFC-113 (TF)	HCFC-225
---------------------------------------	-----------------	----------

USAGE INSTRUCTIONS

For industrial use only.

Read MSDS carefully prior to use.

Spray 4-6 inches from surface to clean. Wash parts from top to bottom, allowing the liquid to flush away flux residues, dirt and dissolved oil. For precise application use attached extension tube.

AVAILABILITY

ES7100	12 oz. Aerosol
ES7101	1 Gallon Liquid

DISTRIBUTED BY: