


ZMN2430HP 2.4GHZ HIGH POWER SINGLE CHIP ZIGBEE™ WIRELESS MESH NETWORKING MODULE

Small in size, the low cost ZMN2430HP module is ideal for ZigBee applications needing higher RF power (+18dBm, software adjustable from -2dBm to +18dBm) including industrial sensors, building and home automation, and any other applications requiring ZigBee's unique capabilities. The 2.4GHz, license-free band is also more widely accepted internationally. Based on the CC2430 SoC, the sleep current is less than 3uA for the entire module.

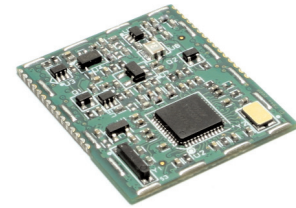

ZigBee/802.15.4. The ZMN2430HP includes the ZigBee 2006 stack as well as Cirronet's CSM profile eliminating the need for any firmware development. The ZMN2430HP can operate as a reduced function device (RFD) for end devices to consume the least amount of power, or as a full function device (FFD) to act as a Coordinator or Router. Each node type can be ordered separately or the module's bootloader can be used to load the appropriate firmware during manufacture.

Industrial Networking. With +18dBm of transmit power (adjustable to +10dBm for use in the EU), the ZMN2430HP has the power to communicate in industrial and high noise environments. The ZMN2430HP also has a full industrial temperature operating range, -40°C to +85°C. Building on Cirronet's many years of developing products for industrial applications, the ZMN2430HP is uniquely designed with Cirronet's proprietary technology that guarantees industrial grade performance.

Rapid & Cost-Effective Integration. The ZMN2430HP is treated just like other integrated circuits. Even though it is a complete RF module, it is reflow soldered to the host PCB - there is no need for expensive, unreliable connectors and with its small

footprint, there is no size penalty for using a module. Cirronet has relied on its experience in helping hundreds of OEMs integrate Cirronet modules to create a full set of development and configuration tools.

FCC & ETSI Certifications. Cirronet has obtained FCC and ETSI certifications as a module. This means FCC & CE type acceptance testing is not required for the device into which the module is integrated, saving you money and getting your product to market faster.

Experience. Cirronet's 20 years of experience in RF goes into every ZMN2430HP module. Our RF know-how and practical engineering have made Cirronet the choice of hundreds of OEMs. OEMs know they can rely on Cirronet products and Cirronet's unsurpassed technical support to help get their products to market on time.

Let us be your experts. Cirronet has delivered high-performance wireless products since 1987. To find out how to put our experience to work for you, call **+1.678.684.2000** or visit our website at **www.cirronet.com**.

FEATURES:

- 2.4 GHz Direct Sequence Spread Spectrum technology
- Ad hoc mesh network
- High Power (+18dBm)
- Small size, light weight
- FCC & ETSI certified for unlicensed operation

BENEFITS:

- Worldwide license-free operation
- Redundant, self healing network
- Supports large number of nodes
- Ideal for noisy, industrial applications
- Easy to integrate
- Shortens time to market
- Low cost



CIRRONET.
An RF Monolithics Company

ZMN2430HP SPECIFICATIONS

GENERAL SPECIFICATIONS


| | |
|-----------------------|---|
| RF Frequency | 2401 - 2475 MHz |
| Spreading Method | Direct Sequence |
| Modulation | O-QPSK |
| Transmit Power | +18dBm into 50 ohms (Software adjustable from -2dBm to +18dBm allowing ETSI certification) |
| Receive Sensitivity | -95 dBm for 10 ⁻⁵ BER |
| RF Channels | 15 |
| RF Data Rate | 250 Kbps |
| I/O | 1 – SPI Port 6 – General purpose I/O lines 3 – 7 - 12-bit ADCs 2 – PWMs 1 – UART |
| Operating Voltage | 3.3Vdc – 5.5Vdc |
| Current Consumption | Sleep – <3 μ A@3.3V typical Receive – 33 mA@3.3V typical Transmit – 130 mA@3.3V typical |
| Operating Temperature | -40°C to +85°C |

CONNECTOR PINOUT

| | |
|-----------------|-------------------|
| Pin 1 - GND | Pin 30 - GND |
| Pin 2 - RSVD | Pin 29 - RFIO |
| Pin 3 - RSVD | Pin 28 - GND |
| Pin 4 - GPIO0 | Pin 27 - NC |
| Pin 5 - UART_TX | Pin 26 - NC |
| Pin 6 - UART_RX | Pin 25 - ADC REF |
| Pin 7 - GPIO4 | Pin 24 - ADCZ |
| Pin 8 - GPIO5 | Pin 23 - SPI_SCLK |
| Pin 9 - PWMA | Pin 22 - SPI_EN |
| Pin 10 - GPIO2 | Pin 21 - SPI_MOSI |
| Pin 11 - GPIO1 | Pin 20 - SPI_MISO |
| Pin 12 - GPIO3 | Pin 19 - ADCY |
| Pin 13 - PWMB | Pin 18 - ADCX |
| Pin 14 - VCC | Pin 17 - /RESET |
| Pin 15 - GND | Pin 16 - GND |

PHYSICAL SPECIFICATIONS

ZMN2430 Outline and Mounting Dimensions

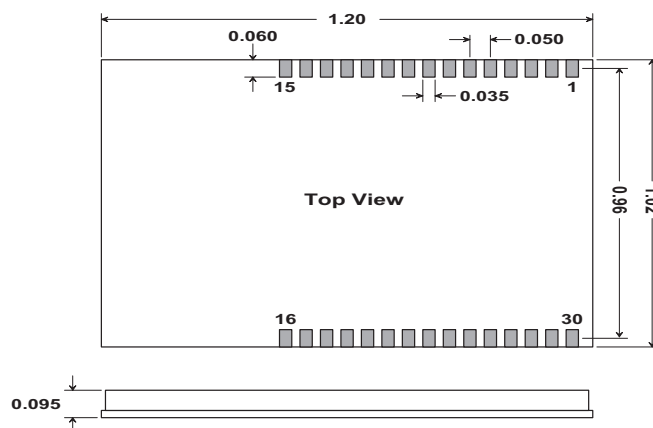

10/2007