
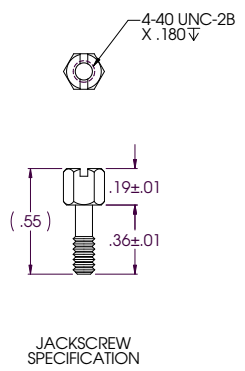
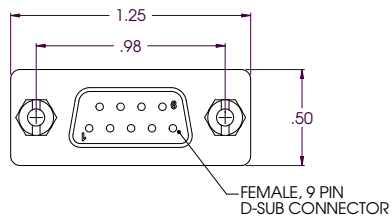






THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	REVISED ELECTRICAL SPECIFICATION 1111	09/21/03	MCCORMACK
E	ECN #1451 - ADDED COMPONENT SPECIFICATION TABLE	01/06/04	B.MAZURKA
F	ECN #1460 - CHANGED COMPONENT SPECIFICATION TABLE	01/06/04	B.MAZURKA
G	ECN #1460 - CHANGED LABEL NOTE FROM GNDING CHECK - TO SOCKET SAVER	02/04/04	B.MAZURKA

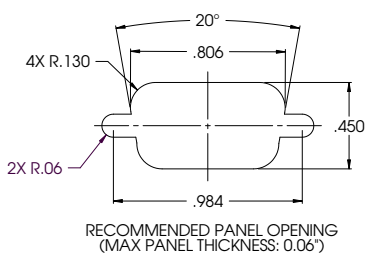

APPLICATION NOTES:  
ALL PINS WIRED STRAIGHT THROUGH

LABELING:  
PANTONE 2945 BLUE, "L-COM" FONT MyriadMM ITALIC.  
"SOCKET SAVER" FONT ARIAL BOLD, TEXT HEIGHTS: .085"  
TEXT COLOR: WHITE.

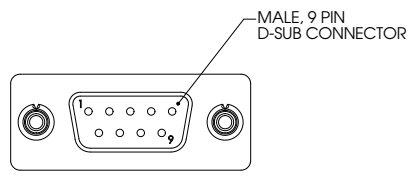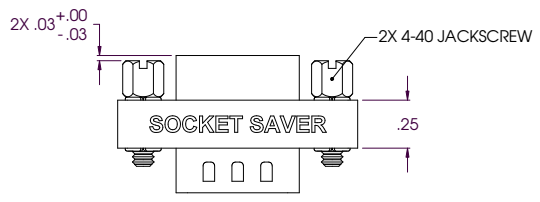

Component Specifications	
<b>Material</b>	
Shell	Steel
Contacts/Terminals	Copper Alloy
Hardware	Brass
Insulator	PBT Fiber Reinforced (UL 94V-0 Rated)
<b>Finish</b>	
Shell	Tin/Nickel Plated
Contacts/Terminals	Gold Flash Plated: 1 - 1.5µ inches
Hardware	Nickel Plated
<b>Electrical</b>	
Current Rating	3 AMP
Insulation Resistance	1000 MΩ Min @ 500 VDC
Dielectric Withstanding Voltage	1000 VAC (for One minute)
<b>Environmental</b>	
Operational Temperature Range	-55°C to +105°C
	CS-131

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:  
X ±1  
XX ±.05  
XXX ±.005  
CABLE LENGTH TOLERANCE  
-300' ±5% +300' ±2%

APPROVALS	DATE	PRODUCT DESCRIPTION
DRAWN BY R. CARRICK	09/28/2002	SOCKET SAVER, DB9 MALE/FEMALE
CHECKED BY I. CLARK	09/28/2002	DRAWING TITLE
APPROVED BY D. PARHAM	09/28/02	SCALE: 2:1
		CAD FILE: DGB9MF-OD1.DWG

L-com 45 BEECHWOOD DRIVE  
NORTH ANDOVER, MA  
01845

OUTLINE DRAWING

REV: B 43321 DWS: NO: DGB9MF-OD1

SHEET 1 OF 1