


DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1876	A	RELEASED	EO	03/21/06	TL	05/15/06	HO	05/15/06

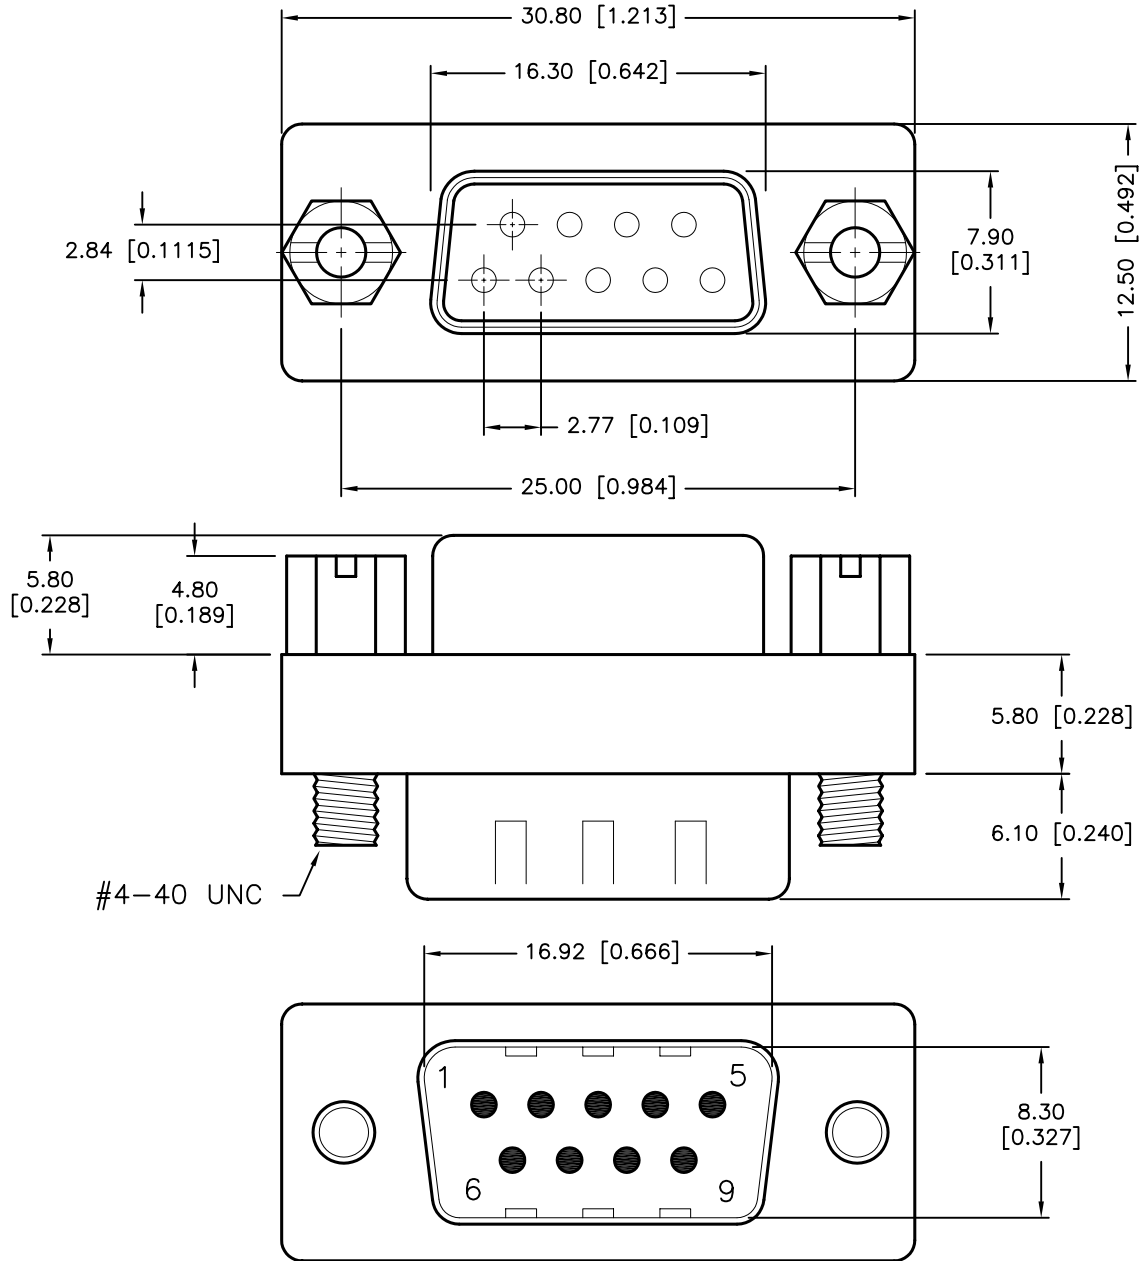

Specification:

- 1- Shell: Steel, Tin Plated
- 2- Contact: Gold Plated Over Nickel
- 3- Insulator: PBT Glass Fibre Reinforced UL94V-0
- 4- Current Rating: 3 AMP
- 5- Dielectric Strength: 1000V for One Minute
- 6- Insulator Resistance: 1000 Megohm Min at 500VDC
- 7- Temperature: -55°C to +105°C

SPC-F004.DWG

TOLERANCES: Unless Otherwise Specified .X ±0.20 [0.01] .XX ±0.12 [0.005]	DRAWN BY: EKLAS ODISH	DATE: 03/21/06	DRAWING TITLE: Mini Gender Changer, DB9 M/F, RoHS Compliant			
	CHECKED BY: THOMAS LEE	DATE: 05/15/06	SIZE A	DWG. NO. SPC15467	ELECTRONIC FILE 79K5041.DWG	REV A
	APPROVED BY: HISHAM ODISH	DATE: 05/15/06	SCALE: NTS		U.O.M.: mm [INCHES]	SHEET: 1 OF 1

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.