






ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS			DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1891	A	RELEASED	EO	5/25/06	SA	7/25/06	HO	7/25/06

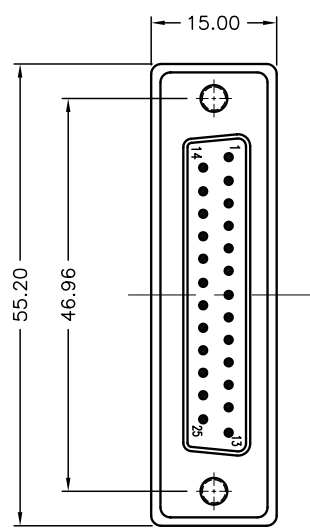

DB-25 Pin Male

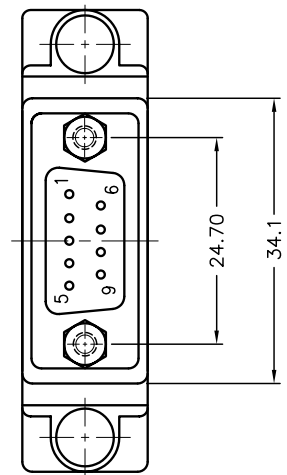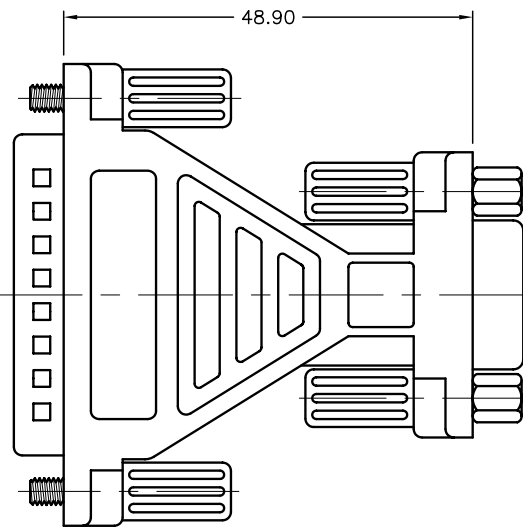

DB-9 Pin Female

PIN DIAGRAM

DB-25M	DB-9F
8	1
3	2
2	3
20	4
7	5
6	6
4	7
5	8
22	9
SHELL	SHELL

Specifications:

- Body: PVC, Gray Color
- Metal Shell: Steel, Nickel-Plated
- Contact: Brass, Gold-Plated
- Insulator: PBT, Blue Color
- Thumb Screws: Steel, Nickel-Plated with Gray PVC Handle
- Hex Nut: Brass, Nickel-Plated

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED,
FRACTIONS, DECIMALS, ANGLES
X ±0.2
.XX ±0.12

DRAWN BY:	DATE:
EKLAS ODISH	5/25/06
CHECKED BY:	DATE:
SAMI ALNADI	7/25/06
APPROVED BY:	DATE:
HISHAM ODISH	7/25/06

DRAWING TITLE: Serial Port Adapter, AT Connection to Modem, DB9F/DB25M			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC19829	84K8591.DWG	A
SCALE: NTS	U.O.M.: Millimeters	SHEET: 1 OF 1	