
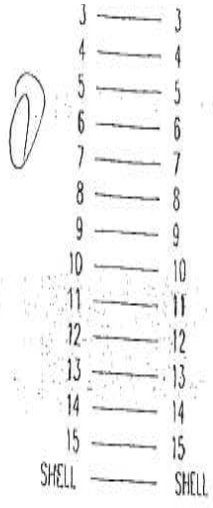


FROM : GOOD WAY

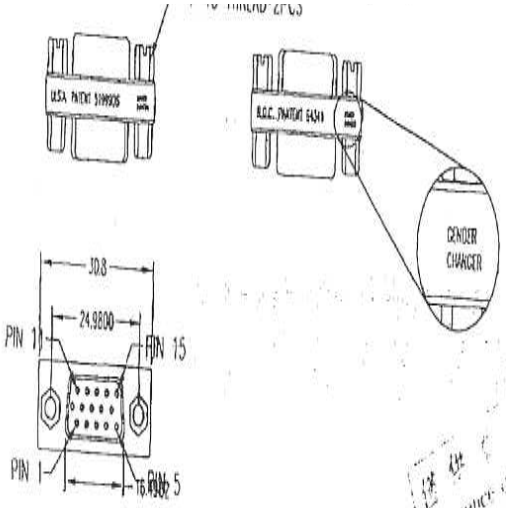

Reference sheet

- SPECIFICATION:**
1. SHELL: STEEL/ZINC PLATED OR TIN PLATED
 2. PIN CONTACT: GOLD PLATED OVER NICKEL
 3. INSULATOR: PBT GLASS FIBRE REINFORCED
UL 94 V0
 4. CURRENT RATING: 5 AMP
 5. DIELECTRIC STRENGTH: 1000V FOR ONE MINUTE
 6. INSULATOR RESISTANCE: 1000MΩ MIN AT 500V DC
 7. TEMPERATURE: -55°C - +105°C
 8. PACKAGE: W/CLEAR POLYBAG

REV	DESCRIPTION	DATE	ECN NO.
1-0		OCT-18-2000	
DWG NAME: SUPER THIN G.C. G. W. NO: A2023AEX-00 CUS. ID: 10V001 CUS. NO: 920.41132.3 DWG. NO: 10V-146			
SHEET: 1/1	TOLERANCE: X XX: ±0.40	UNIT: mm	DRAWN: BY
SCALE: 1:1		CHECKED:	

886 2 89191865 04/02 '02 14:08 NO.512 12