


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.


SPC-F005.DWG

REVISIONS				DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398						
DCP #	P # REV DESCRIPTION		DRAWN	DATE	CHECKD	DATE	APPRVD	DATE		
1789	Α	RELEASED	DCM	1/1/07	TL	2/2/07	JWM	2/2/07		

RoHS Compliant

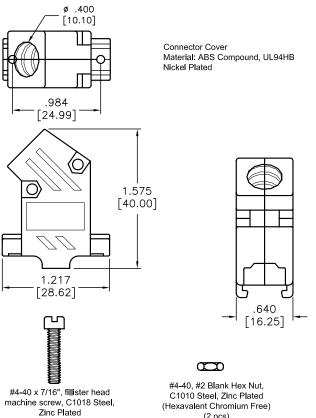

(Hexavalent Chromium Free) (2 pcs)



Material: Thermoplastic Color: Black

Durometer: 75±5 Type A Per ASTM D2240





#4-40 x 1/2", fillister head captive screw, C1018 Steel, Zinc Plated (Hexavalent Chromium Free) (2 pcs)



#4 Saddle Washer, C.R. Steel, Zinc Plated (Hexavalent Chromium Free) (2 pcs)

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDEO USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

(Hexavalent Chromium Free) (2 pcs)

> TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

	DRAWN BY:	DATE:		ING TITLE:					_	
	Dan McVicker	1/2/07	9 P	in D-Sub	Cover	, Metalized	Plastic,	45	Degree	Exit
	CHECKED BY:	DATE:	SIZE	DWG. NO.			ELEC.	FRONIC	FILE	REV
	Thomas Lee	2/5/07	Α	SPC14995		80	80K5405.dwg		A	
	APPROVED BY:	DATE:			- 					
Jeff McVicker 2/		2/5/07	SCALE: NTS		l	U.O.M.: INCHES [mm]		SHEET	T: 1 OI	F 1