


Alle Rechte vorbehalten/ All rights reserved

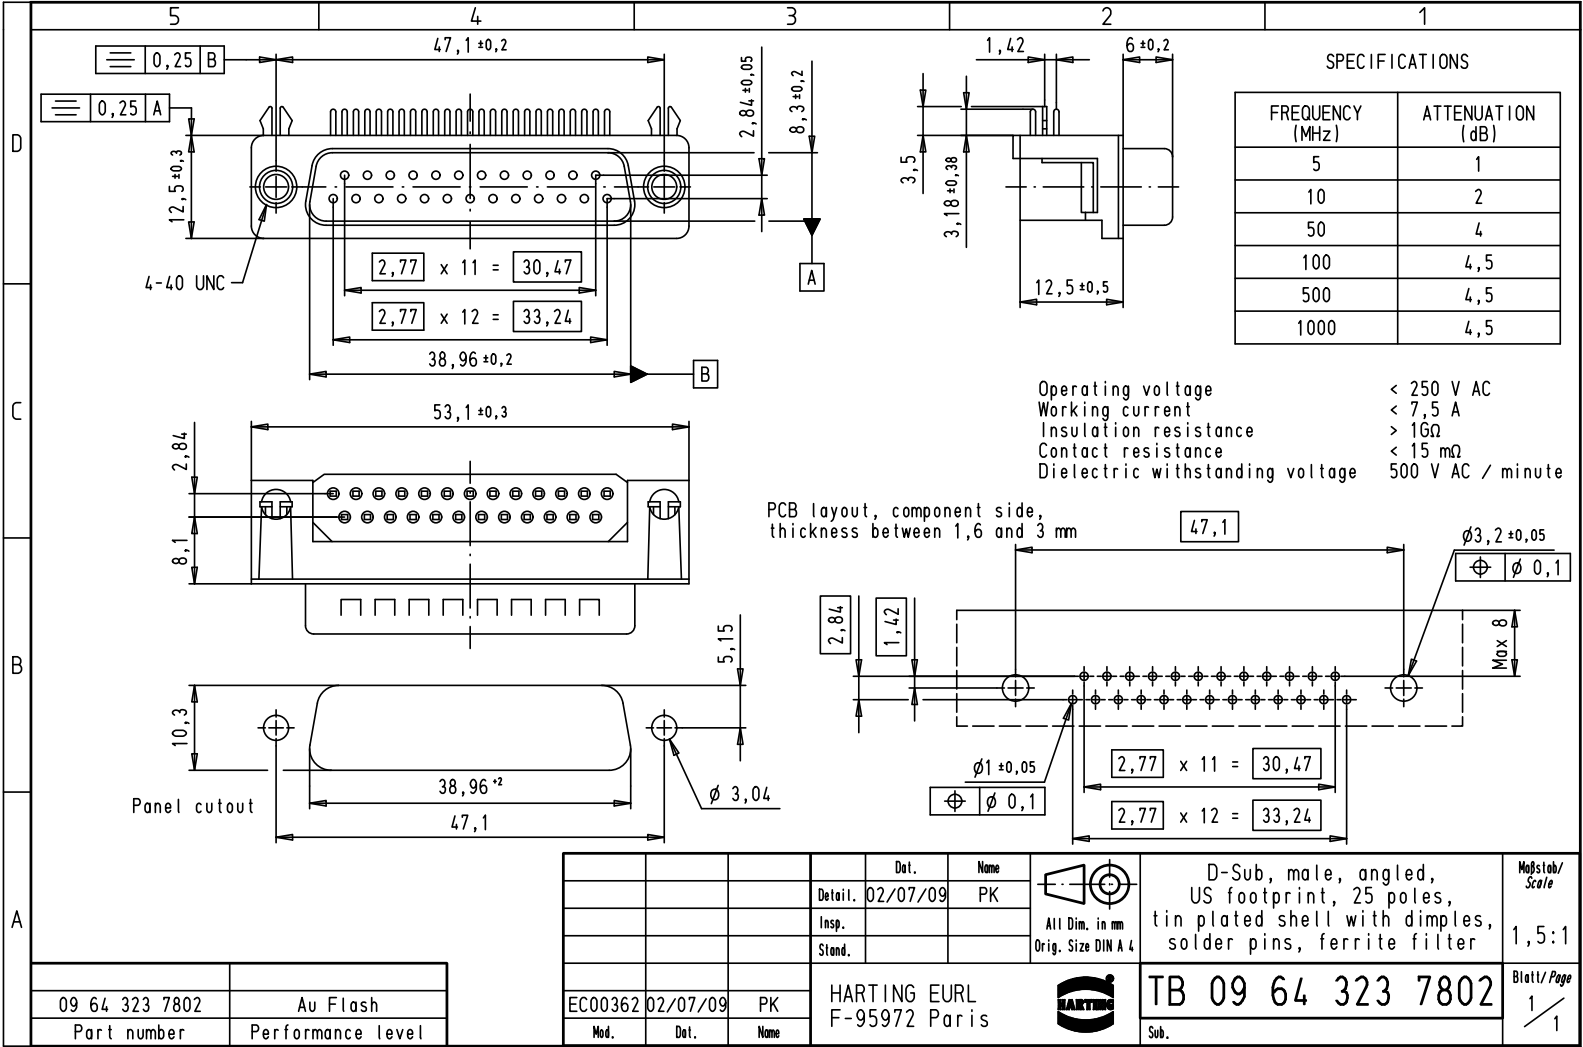

SPECIFICATIONS

FREQUENCY (MHz)	ATTENUATION (dB)
5	1
10	2
50	4
100	4,5
500	4,5
1000	4,5

Operating voltage < 250 V AC
 Working current < 7,5 A
 Insulation resistance > 1GΩ
 Contact resistance < 15 mΩ
 Dielectric withstanding voltage 500 V AC / minute

PCB layout, component side, thickness between 1,6 and 3 mm

			Det.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, angled, US footprint, 25 poles, tin plated shell with dimples, solder pins, ferrite filter	Maßstab/ Scale 1,5:1	
			Detail.	02/07/09				PK
			Insp.					
			Stand.					
09 64 323 7802 Part number			Au Flash Performance level			TB 09 64 323 7802 Sub.	Blatt/ Page 1 / 1	
EC00362 Mod.			02/07/09 Det.					PK Name
HARTING EURL F-95972 Paris								