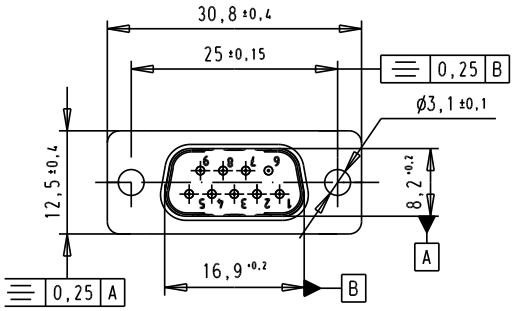

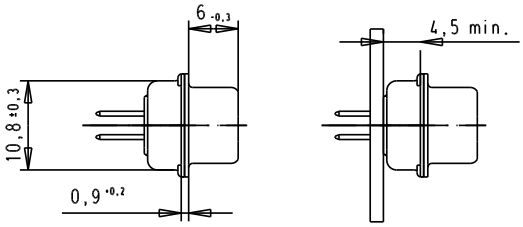

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	47pf ±20%
Working Voltage	100V
Current rating	7.5 A
Insulation Resistance	>1GΩ

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	–
10	–
50	–
100	–
500	30dB
1000	35dB

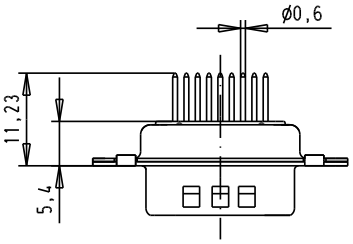

PCB Layout, Component side

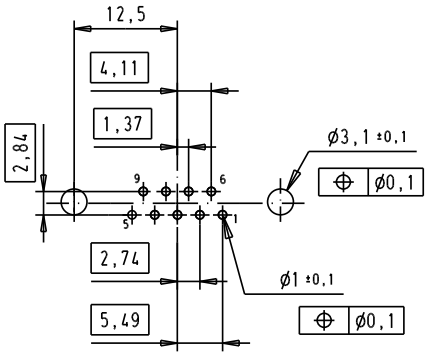

				Dat.	Name
			Detail.	8-JUL-02	CV
			Insp.		
			Stand.		
32802	11/07/05	JMDR			
31058	8-JUL-02	CV			
Mod.	Dat.	Name			

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

D-Sub, male, straight, 9 Poles, with turned solder pin, fixing hole

Maßstab/Scale 1.5:1

TB 09641227210

Sub.

Blatt/Page 1/1

Downloaded from Elcodis.com electronic components distributor