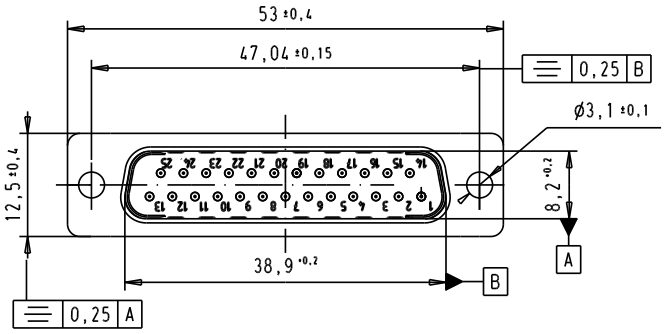



SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	47pf±20%
Working Voltage	100v
Current Rating	7,5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

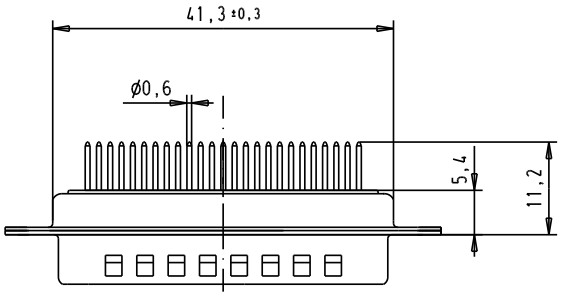

PCB Layout, Component side

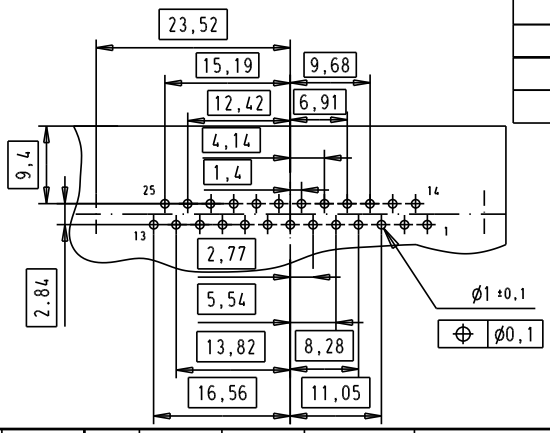

				Dat.	Name		
			Detail.	8-JUL-02	CV	All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 25 Poles, turned solder pin, tin plated shell with dimples and holes
			Insp.				
			Stand.				
33423	06/02/06	JMDR	HARTING EURL F-95972 Paris				TB 09643227210
31058	8-JUL-02	CV					
Mod.	Dat.	Name					Sub.

Ma?Mstab/ Scale: 1.5:1

Blatt/ Page: 1/1

Downloaded from Elcodis.com electronic components distributor