
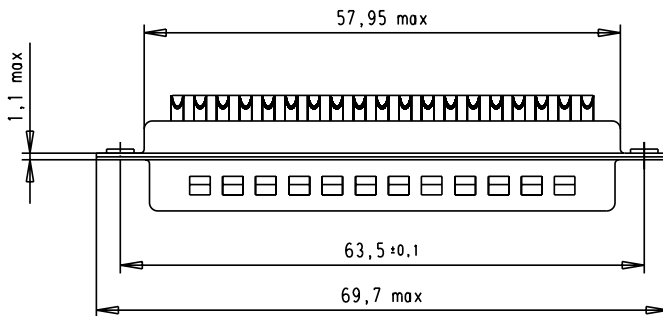



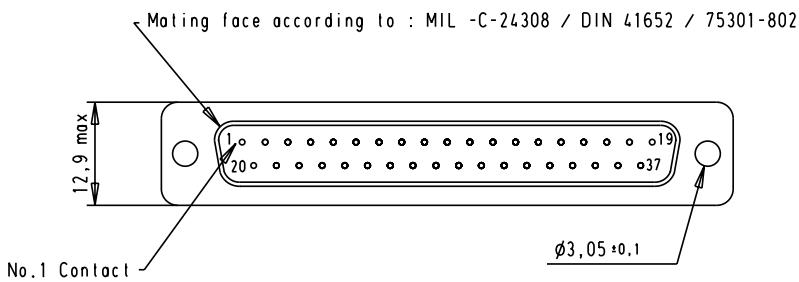

5 4 3 2 1

SPECIFICATION

Mating Cycles	200
Capacitance	47pf±20%
Working Voltage	100v
Current Rating	7,5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB



			Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, Straight 37 Poles, with turned solder bucket and hole	No. of Stab/ Scale 1.5:1	
			Detail.	8-JUL-02				CV
			Insp.					
			Stand.					
31058	8-JUL-02	CV	HARTING EURL F-95972 Paris				TB 09644217210	Blat / Page 1 / 1
Mod.	Dot.	Name	Sub.					