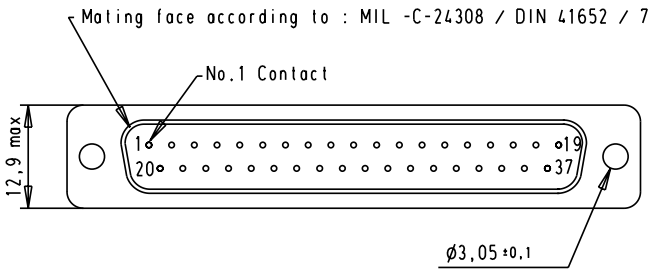

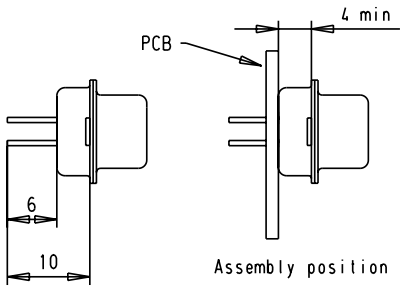

SPECIFICATION

Mating Cycles	200
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB

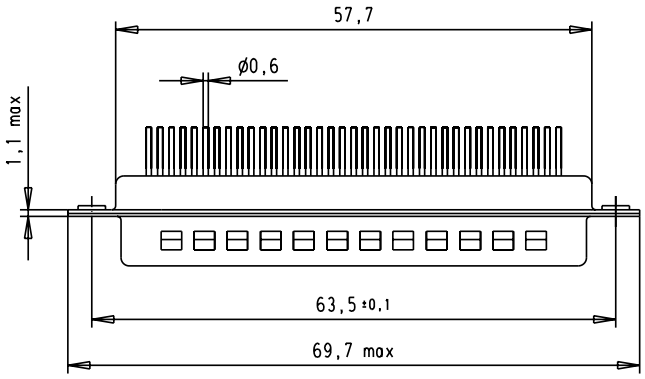

PCB Layout
Component side

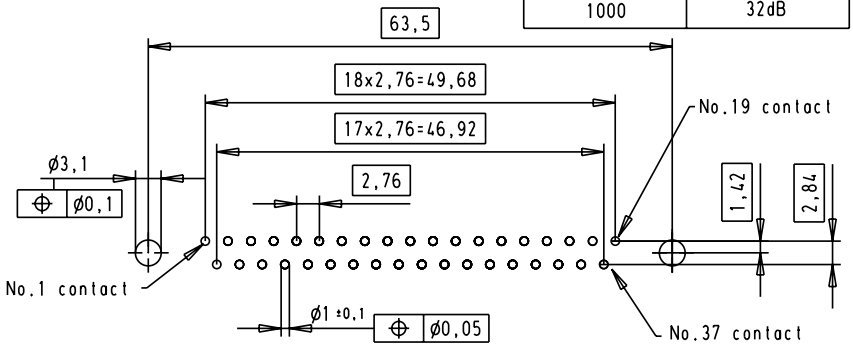

				Dat.	Name		
			Detail.	8-JUL-02	CV	All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 37 Poles, with turned solder pin and hole
			Insp.				
			Stand.				
31058	8-JUL-02	CV	HARTING EURL F-95972 Paris				TB 09644227240
Mod.	Dat.	Name					Sub.

Ma?Mstab/ Scale 1.5:1

Blatt/ Page 1/1

Downloaded from Elcodis.com electronic components distributor