

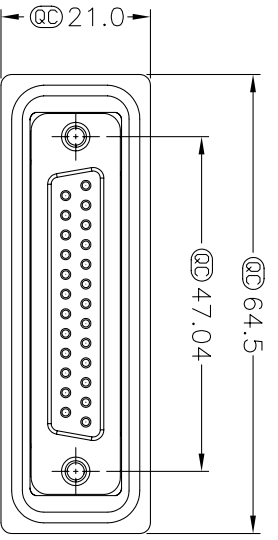
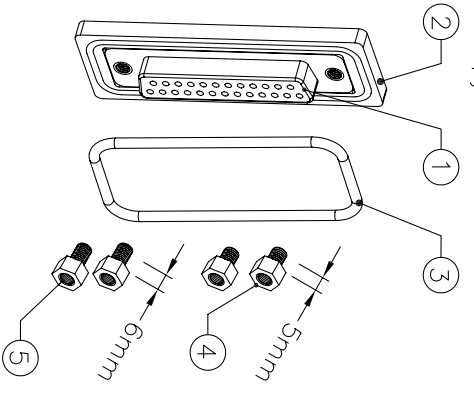


REV.	ECN NO.	DATE	SIGN	DESCRIPTION

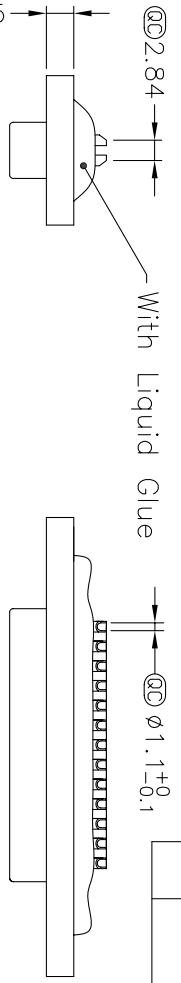

Panel Thickness  
 Screw L=5.0 For Panel Thickness Under 1.2mm  
 Screw L=6.0 For Panel Thickness Between 1.2~2.0mm

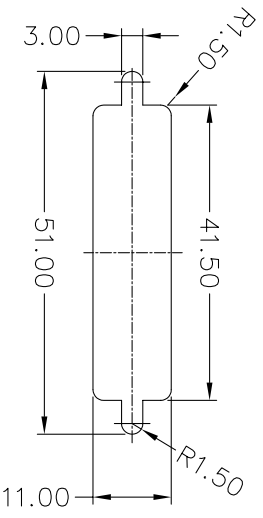

- Note:
- Materials
  - Connector : D-SUB 25Pin, Pin: Brass,Gold Flash
  - Plastic Jacket : Nylon+Glass Filled
  - Ring : Silicone
  - Screw : Brass,Nickel Plated
3. Applicable Wire Range: 22AWG-26AWG

Warning! Drawings & Specifications Are Subject To Change Without Notification

LTWSDDB-25PFFS-SL7001	LTWSDDB-25PMMS-SL7001
LTWSDDB-25PFFS-SL8001	LTWSDDB-25PMMS-SL8001
P13	P1
P13	P13
P25	P14
P14	P14
P25	P25

Pin Assignments Front View

TITLE  
 D-SUB For Panel Mount,  
 25Pin, Solder Type 180°

UNIT : mm	SCALE 1:1	SHEET 1 OF 1
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	REV. A	SIZE A4

LTW

亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	LTWSDDB-25PXXS-SLX001		Ju Xiao Fang			2004/07/16