

# Hubbell GFCI Receptacles for Commercial, Residential, OEM, Industrial and Hospital Applications

# HUBBELL



*LED GFCI*



*AUTOGUARD™ Self Test*



*Industrial Tamper Resistant*



*Industrial Hospital Grade  
Self Test Tamper Resistant*

***Hubbell Tough, Hubbell Safe.  
Nothing Protects Like Hubbell GFCI Solutions.***



Wiring Device-Kellems

# Hubbell Circuit Guard® Functional LED and Combination Switch/GFCI



The Hubbell LED indicates the ability of the GFCI to perform its "ground fault protection" function when tested. A rapidly flashing red LED will alert even an unfamiliar user if a problem exists. This design meets the 2006 UL 943 revisions including "no power to the face when miswired" and "end of life indication" when unit is no longer capable of providing GFCI protection. In addition, this design meets the 2006 UL 943 surge testing (3kA, 6kV) without having to resort to an inoperative power mode that locks out the end user.

## LED GFCI



NEMA 5-15P  
15A 125V  
UL CSA



NEMA 5-20P  
20A 125V  
UL CSA



NEMA 5-15P  
15A 125V  
UL CSA



NEMA 5-20P  
20A 125V  
UL CSA

### Commercial

### Faceless

### Hospital

Color	15A	20A	20A	15A	20A
Brown	GF15L	GF20L	GFBF20L	GFR8200HL	GFR8300HL
Ivory	GF15IL	GF20IL	GFBF20IL	GFR8200HIL	GFR8300HIL
White	GF15WL	GF20WL	GFBF20WL	GFR8200HWL	GFR8300HWL
Gray	GF15GYL	GF20GYL	GFBF20GYL	GFR8200HGYL	GFR8300HGYL
Black	GF15BKL	GF20BKL	GFBF20BKL	GFR8200HBKL	GFR8300HBKL
Red	GF15RL	GF20RL	GFBF20RL	GFR8200HRL	GFR8300HRL
Office White	GF15OWL	GF20OWL	GFBF20OWL	GFR8200HOWL	GFR8300HOWL
Almond	GF15ALL	GF20ALL	GFBF20ALL	GFR8200HALL	GFR8300HALL
Light Almond	GF15LAL	GF20LAL	GFBF20LAL	GFR8200HLAL	GFR8300HLAL

Bulk Pack\*

\* 15A & 20A Commercial Bulk pack, 50 pieces. Wall plate not included.  
For bulk pack use suffix "BULK" at end of base catalog. Example GF15LBULK.

Notes: GFCI type receptacles should not be used in critical care patient areas or for electrical life support equipment applications because of the possibility of power interruption.



GF15L



GFBF20BKL



GFR8200HWL



GFSP15I



GFSP15I


## LED GFCI with Auto Ground

Color	15A	20A
Brown	GF15LGD	GF20LGD
Ivory	GF15ILGD	GF20ILGD
White	GF15WLGD	GF20WLGD
Gray	GF15GYLGD	GF20GYLGD
Black	GF15BKLGD	GF20BKLGD
Red	GF15RLGD	GF20RLGD
Office White	GF15OWLGD	GF20OWLGD
Almond	GF15ALLGD	GF20ALLGD
Light Almond	GF15LALGD	GF20LALGD

## Combination Switch/LED GFCI

Color	15A
Brown	GFSP15
Ivory	GFSP15I
White	GFSP15W
Black	GFSP15BK
Almond	GFSP15AL
Light Almond	GFSP15LA

## Dimensions

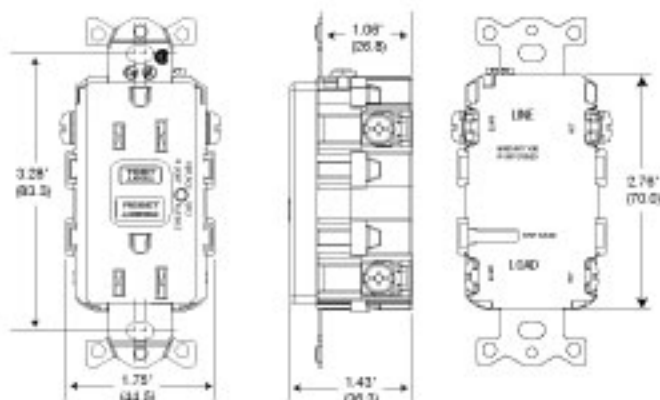

## Specifications

Trip Level	4 - 6 mA
Trip Time	.025 sec
Frequency	60Hz
Voltage	120V AC +10% - 15%
Amperage	15A/20A, 20A Feed Thru
Maximum Humidity	95%
Maximum Interrupting Capacity	2,000 Amps
Operating Temperature	-35° C to +68° C (-30° F to +150° F)
Codes & Standards	Meets UL 943 Class A GFCIs and UL 498 for Receptacles Complies to NEC, CEC & OSHA UL File E-41978, CSA File LR-24886
Terminal Accommodations	#14-10 AWG stranded or solid copper conductors only.

# Hubbell AUTOGUARD™ Self Test



You may forget to test, but the Hubbell AUTOGUARD GFCI won't! While the Hubbell GFR is actively ready to provide ground fault protection, an additional circuit is continually monitoring the ability to protect every 60 seconds. This self-test, diagnostic feature is a significant contrast to the one time per month test that users are suggested to perform today. With this feature, the ability to provide people protection can now be verified on a continuous basis. When was the last time you tested your ground fault receptacle?

## AUTOGUARD™ Self Test GFCI



NEMA 8-15P  
15A 120V  
UL CSA



NEMA 8-20P  
20A 120V  
UL CSA



NEMA 8-15P  
15A 120V  
UL CSA



NEMA 8-20P  
20A 120V  
UL CSA

	Commercial		Faceless	Hospital	
Color	15A	20A	20A	15A	20A
Brown	GFST15	GFST20	GFSTBF20	GFR8200HST	GFR8300HST
Ivory	GFST15I	GFST20I	GFSTBF20I	GFR8200HIST	GFR8300HIST
White	GFST15W	GFST20W	GFSTBF20W	GFR8200HWST	GFR8300HWST
Gray	GFST15GY	GFST20GY	GFSTBF20GY	GFR8200HGYST	GFR8300HGYST
Black	GFST15BK	GFST20BK	GFSTBF20BK	GFR8200HBKST	GFR8300HBKST
Red	GFST15R	GFST20R	GFSTBF20R	GFR8200HRST	GFR8300HRST
Office White	GFST15OW	GFST20OW	GFSTBF20OW	GFR8200HOWST	GFR8300HOWST
Almond	GFST15AL	GFST20AL	GFSTBF20AL	GFR8200HALST	GFR8300HALST
Light Almond	GFST15LA	GFST20LA	GFSTBF20LA	GFR8200HLAST	GFR8300HLAST

Bulk Pack\*

\* 15A & 20A Commercial Bulk pack, 50 pieces. Wall plate not included.  
For bulk pack use suffix "BULK" at end of base catalog. Example GFST15IBULK.

Notes: GFCI type receptacles should not be used in critical care patient areas or for electrical life support equipment applications because of the possibility of power interruption.



GFST15W



GFST20I



GFSTBF20BK



GFSTBF20I




GFR8200HWST



GFR8300HST

## Dimensions

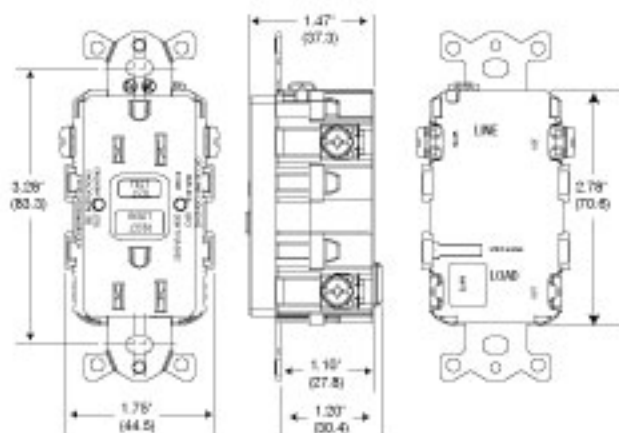

## Specifications

Trip Level	4 – 6 mA
Trip Time	.025 sec
Frequency	60Hz
Voltage	120V AC +10% - 15%
Amperage	15A/20A, 20A Feed Thru
Maximum Humidity	95%
Maximum Interrupting Capacity	AUTOGUARD: 10,000 Amps
Operating Temperature	-35° C to +66° C (-30° F to +150° F)
Codes & Standards	Meets UL 943 Class A GFCIs and UL 498 for Receptacles Complies to NEC, CEC & OSHA UL File E-41978, CSA File LR-24886
Terminal Accommodations	#14-10 AWG stranded or solid copper conductors only.

# Hubbell Industrial Tamper Resistant and AUTOGUARD™ Self-Test



This patented industrial design includes an exclusive tamper resistant system to protect against objects being placed in a blade opening. Due to a unique switching technology, power is not present if an object is inserted within an individual slot. This is significantly superior to the plastic shutter method that is used by competition today.

The National Electric Code per article 517.18C states "Pediatric Locations, receptacles located within rooms, bathrooms, playrooms, activity rooms and patient care areas of pediatric wards shall be listed tamper resistant or shall employ a listed tamper resistant cover."

This Fed Spec solution is also an excellent choice for psychiatric areas, medical facilities, heavy industrial, prisons, day care, laboratories, elderly facilities and schools. Industrial "robust" mechanical design & materials provide a receptacle with superior performance. This technology is also available in Hospital Grade.

## Tamper Resistant GFCI



NEMA 5-20P  
15A 120V  
UL CSA



NEMA 5-20P  
20A 120V  
UL CSA



NEMA 5-15P  
15A 120V  
UL CSA



NEMA 5-20P  
20A 120V  
UL CSA

### Industrial

### Hospital

Color	15A	20A	15A	20A
Brown	GFR5262TR	GFR5362TR	GFR8200TR	GFR8300TR
Ivory	GFR5262ITR	GFR5362ITR	GFR8200ITR	GFR8300ITR
White	GFR5262WTR	GFR5362WTR	GFR8200WTR	GFR8300WTR
Gray	GFR5262GYTR	GFR5362GYTR	GFR8200GYTR	GFR8300GYTR
Black	GFR5262BKTR	GFR5362BKTR	GFR8200RTR	GFR8300RTR
Red	GFR5262RTR	GFR5362RTR	GFR8200BKTR	GFR8300BKTR



GFR5362ITR



GFR8300ITR

## AUTOGUARD™ Self Test Tamper Resistant GFCI

The best of both worlds combine to provide this exclusive industrial and hospital grade safety product.

### Industrial

### Hospital

Color	15A	20A	15A	20A
Brown	GFR5262SG	GFR5362SG	GFR8200SG	GFR8300SG
Ivory	GFR5262SGI	GFR5362SGI	GFR8200SGI	GFR8300SGI
White	GFR5262SGW	GFR5362SGW	GFR8200SGW	GFR8300SGW
Gray	GFR5262SGGY	GFR5362SGGY	GFR8200SGGY	GFR8300SGGY
Black	GFR5262SGBK	GFR5362SGBK	GFR8200SGBK	GFR8300SGBK
Red	GFR5262SGR	GFR5362SGR	GFR8200SGR	GFR8300SGR




GFR5362SGI



GFR8300SGI

The National Electric Code per article 517.18C states "Pediatric Locations, receptacles located within rooms, bathrooms, playrooms, activity rooms and patient care areas of pediatric wards shall be listed tamper resistant or shall employ a listed tamper resistant cover."

## Dimensions

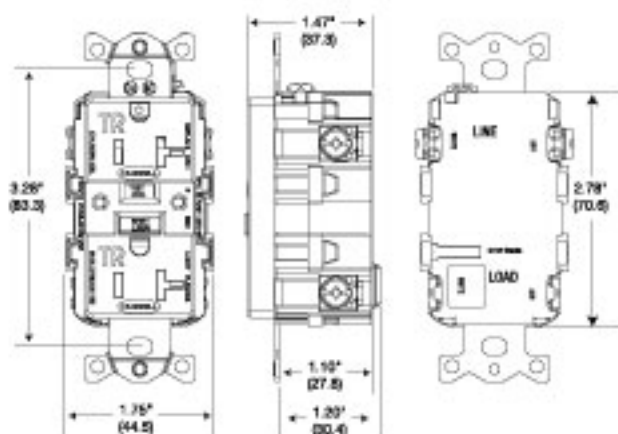

## Specifications

Trip Level	4 - 6 mA
Trip Time	.025 sec
Frequency	60Hz
Voltage	120V AC +10% - 15%
Maximum Humidity	95%
Maximum Interrupting Capacity	2,000 Amps
Operating Temperature	-35°C to +66°C (-30°F to +150°F)
Codes & Standards	Meets 2008 UL 943 Class A GFCIs and UL 498 for Receptacles Complies to NEC, CEC & OSHA UL File E-41978, CSA File LR-24886
Terminal Accommodations	#14-10 AWG stranded or solid copper conductors only.

Note: Tamper Resistant only, has a single LED located to the right of test/reset buttons.

Printed in U.S.A. Specifications subject to change without notice. © Registered trademark of Hubbell Incorporated

Hubbell Incorporated (Delaware) • 185 Plains Road • Milford, CT 06461-2420 • (203) 882-4800 • FAX (800) 255-1031

H5212



Wiring Device-Kellems

www.hubbell-wiring.com