



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/17/06	MCCORMICK

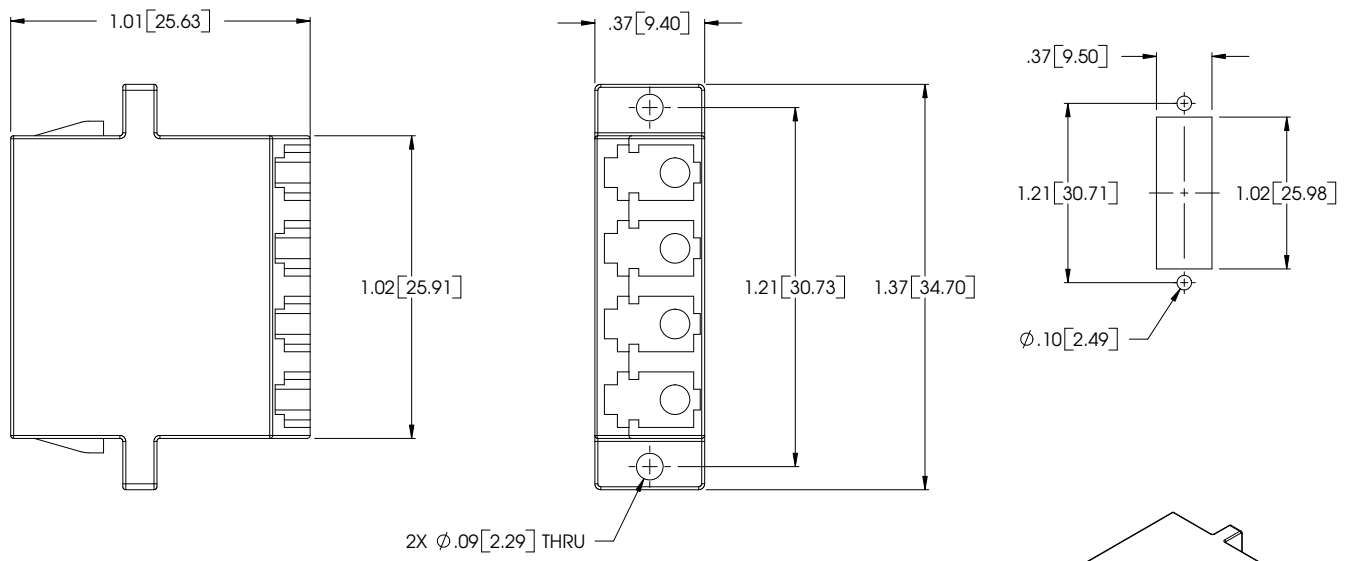

2X $\phi .09$ [2.29] THRU



OUTLINE DRAWING

NOTES:


MATERIAL:
 HOUSING: PEI (POLYETHERIMIDE)
 SPLIT SLEEVE: SEE TABLE
 DUST CAPS (NOT SHOWN): POLYPROPYLENE

SPECIFICATIONS:
 MEETS GR-326-CORE, EIA/TIA568A
 INSERTION LOSS: 0.3 dB
 OPERATING TEMPERATURE: -40°C TO +85°C
 MATINGS: 500+
 FLAMMABILITY: RATED UL94 V-0

MISCELLANEOUS:
 COUPLERS SHALL BE INDIVIDUALLY PACKAGED IN POLY BAG
 RECOMMENDED PANEL THICKNESS: .067 (1.70)
 PARTS SHALL BE ROHS COMPLIANT.

MODEL #	SPLIT SLEEVE MATERIAL	FIBER TYPE
FOA-560	BRONZE	MULTIMODE
FOA-570	ZIRCONIA	SINGLEMODE

APPROVALS		DATE
DRAWN BY	C.MCCORMICK	10/17/2006
CHECKED BY	R.EVANS	10/17/2006
APPROVED BY	J.ROBERTS	10/17/2006



CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

L-com CONNECTIVITY PRODUCTS		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
SIZE	FSCM NO. 43321	DWG. NO.	FOA-560
SCALE: NONE	CAD FILE: FOA-560.SLDDRW	SHEET 1 OF 1	

CATEGORY: FIBER OPTICS
 PRODUCT DESCRIPTION: LC QUAD ADAPTER