
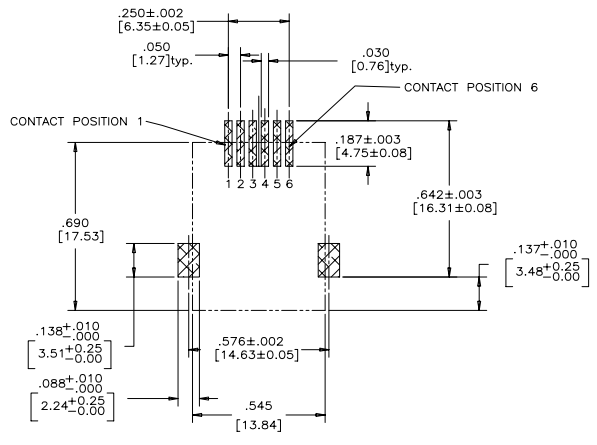


REVISIONS			
SYM	ZONE	ECN, ERN NO.	DATE
A		PROPOSAL	05/08/04
			L.CHAN

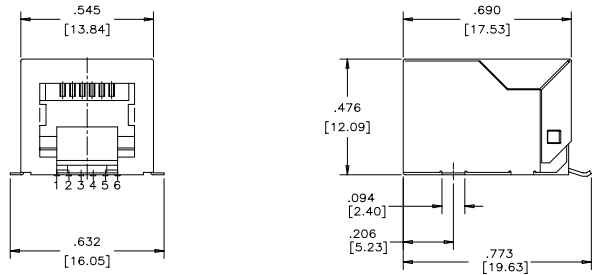

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

NOTES:

1. MATERIALS:

HOUSING: HIGH TEMPERATURE RESISTANT NYLON.
FLAMMABILITY RATING UL 94V-0
COLOUR: SEE AMPHENOL PART NUMBER SYSTEM FOR HOUSING OPTIONS

CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING: SEE AMPHENOL PART NUMBER SYSTEM FOR PLATING OPTIONS.
50 MICRO" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100 MICRO" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: COPPER ALLOY WITH NICKEL PLATED

2. COPLANARITY SPECIFICATION:

WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE AND ALL TERMINAL TAILS AND BOTH FITTING NAILS IS .004 [0.10].

AMPHENOL PART NO.: R J L S E - 6 X 1 X X - 0 1

- GOLD PLATING
- 0 = GOLD FLASH
- 1 = 15 MICRO" GOLD PLATING
- 2 = 30 MICRO" GOLD PLATING
- 3 = 50 MICRO" GOLD PLATING
- NUMBER OF CONTACTS
- 2 = 2 CONTACTS 3 & 4
- 4 = 4 CONTACTS 2 TO 5
- 6 = 6 CONTACTS 1 TO 6
- HOUSING OPTION
- 1 = BLACK HOUSING
- 2 = YELLOW HOUSING
- 3 = RED HOUSING

DRAWN PAUL WANG	DATE 05/08/04
DESIGNED	
CHECKED L.CHAN	DATE 05/08/04
I. E. APPRD.	
Q. A. APPRD.	
DWG. APPRD.	
ENG. REL. NO.	
REF. FAR #12803	
DIMENSIONS ARE IN CODE ID. NO.	
INCHES [mm]	03554

Amphenol Canada Corp.
TITLE SURFACE MOUNT MODULAR JACK
6 POSITION, CONTACT OPTIONS, WITH SHIELD,
WITH GOLD PLATING AND HOUSING OPTIONS
- RoHS COMPLIANT

DWG. DRAWING NO.	REV. A
P-RJLSE-6X1XX-01	
SCALE	SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.