


**Headers**

**Mass Terminated Connector System Male Headers Mate With Female Connectors**

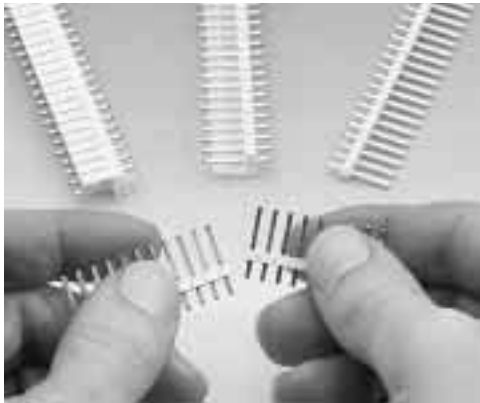

**Headers/Part Numbers System:**

\*MAS-CON headers are breakable molded wafers, dimensionally more accurate than extruded, proven to be very cost effective for prototyping or small production runs.

**Part Numbers System:**

<b>M</b> = Male	→	<b>M</b>
<b>F</b> = Standard	→	<b>F</b>
<b>L*</b> = Locking		
<b>P</b> = Polarizing		
<b>S</b> = Straight Post	→	<b>S</b>
<b>A</b> = Angled Post		
<b>S</b> = Square Pin	→	<b>S</b>
<b>100</b> = 0.100" spacing (2.54 mm)	→	<b>100</b>
<b>156</b> = 0.156" spacing (3.96 mm)		
<b>No. of circuits</b> (See table below)	→	<b>10</b>
<b>Packaging quantity</b> (See table below)	→	<b>D</b>
<b>Contact Plating</b>	→	<b>.</b>
<b>Blank</b> = Tin Plating		
<b>B</b> = 15µmin Gold over Nickel		

**Packaging Quantity**

Spacing	No. of Circuits	Spacing	No. of Circuits	Standard Packs	
				Code	Qty Pcs.
0.100" (2.54 mm)	2 – 5	0.156" (3.96 mm)	2 – 5	D	500
	6 – 36		6 – 24	C	100

\*For MLSS100 and MLAS100 - Circuits 2-12 and 14 positions are solid black wall and are not breakable.