



**Series MF/ML/MP  
.100" Headers**

**.100" (2.54 mm) Headers  
Available in 2-36 Circuits**

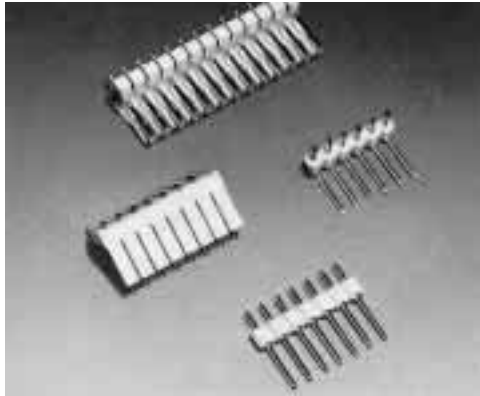


**Right Angled MFAS...**

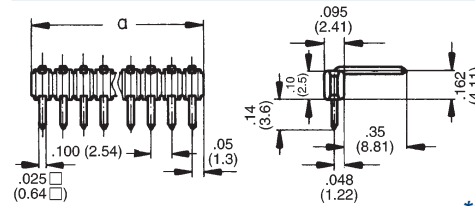


**\*Slotted Back Wall: 13 and 15-36 Circuits**

**Right Angled Locking MLAS**

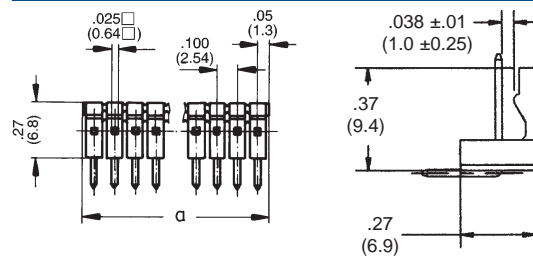


**Straight MFSS...**

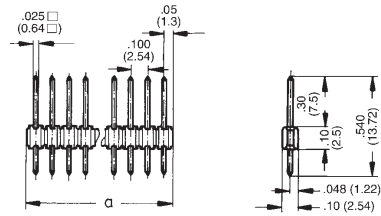


**Right Angled Polarizing MPAS...**

**Printed Circuit Layout...**

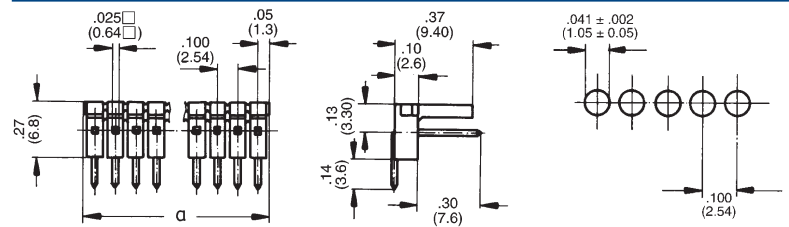


**Straight, Locking MLSS...**

**\*Slotted Back Wall: 13 and 15-36 Circuits**

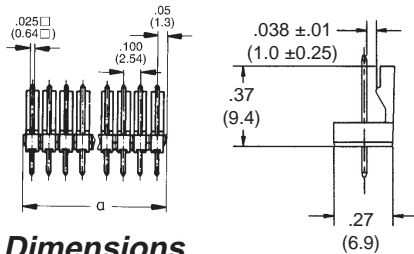

**Straight, Polarizing MPSS...**

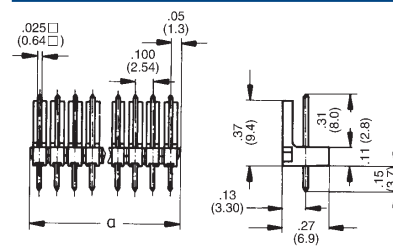

**Dimensions**

| No. of Circuits | 2           | 3           | 4            | 5            | 6            | 7            | 8            | 9            | 10            | 11            | 12            | 13            | 14            | 15            | 16            | 17            | 18            | 19            | 20            | 21            | 22            | 23            | 24            | 25            | 26            | 27            | 28            | 29            | 30            | 31            | 32            | 33            | 34            | 35            | 36            |
|-----------------|-------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Dimensions      | .200 (5.08) | .300 (7.62) | .400 (10.16) | .500 (12.70) | .600 (15.24) | .700 (17.78) | .800 (20.32) | .900 (22.86) | 1.000 (25.40) | 1.100 (27.94) | 1.200 (30.48) | 1.300 (33.02) | 1.400 (35.56) | 1.500 (38.10) | 1.600 (40.64) | 1.700 (43.18) | 1.800 (45.72) | 1.900 (48.26) | 2.000 (50.80) | 2.100 (53.34) | 2.200 (55.88) | 2.300 (58.42) | 2.400 (60.96) | 2.500 (63.50) | 2.600 (66.04) | 2.700 (68.58) | 2.800 (71.12) | 2.900 (73.66) | 3.000 (76.20) | 3.100 (78.74) | 3.200 (81.28) | 3.300 (83.82) | 3.400 (86.36) | 3.500 (88.90) | 3.600 (91.44) |

**Part Number**

| No. of Circuits 2-36 (Contact Factory For Circuit Availability) |                                | □□ = Number of Circuits           |                                 |
|---|--------------------------------|-----------------------------------|---------------------------------|
| Description   |                                |                                   |                                 |
| Straight<br>MFSS100-□□  | Straight Locking<br>MLSS100-□□ | Straight Polarizing<br>MPSS100-□□ | Angled<br>MFAS100-□□            |
|   |                                |                                   | Angled Locking<br>MLAS100-□□    |
|   |                                |                                   | Angled Polarizing<br>MPAS100-□□ |

For MLSS100 and MLAS100 - Circuits 2-12 and 14 - See Page 11