

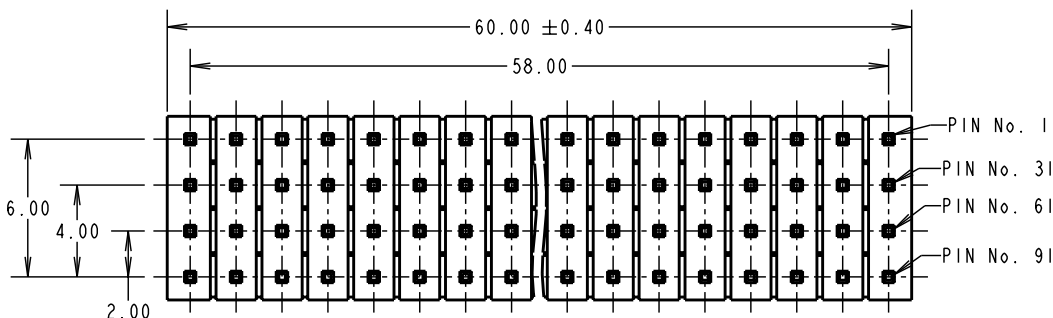


Customer Information Sheet


DRAWING No.: M22-60230XX SHEET 2 OF 2 IF IN DOUBT - ASK (C) NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm



SPECIFICATION:
MATERIALS:
 MOULDING = NYLON 6T UL94V-0 BLACK
 CONTACTS = BRASS
 FINISH (OVER NICKEL):
 GOLD ON CONTACT AREA, 100% TIN ON TAILS
ELECTRICAL:
 CONTACT RESISTANCE = 20 MILLIOHMS MAX.
 INSULATION RESISTANCE = 5000 MEGOHMS MIN.
 CURRENT RATING = 1A MAX.
 VOLTAGE RATING = 250V AC
 VOLTAGE PROOF = 800V AC FOR 1 MINUTE
ENVIRONMENTAL:
 TEMPERATURE RANGE = -55° TO +105°C
PACKING:
 TUBE

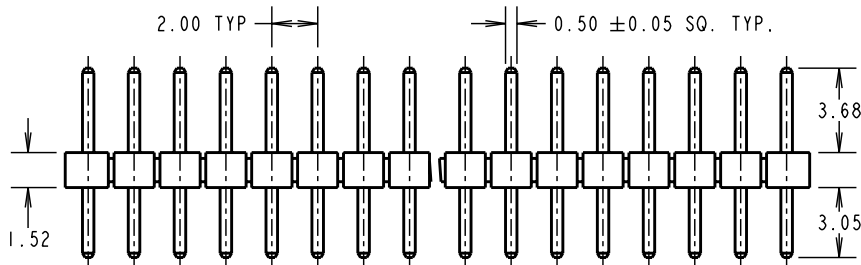

NOTES:
 1. ALL TOLERANCES ARE ±0.20 UNLESS OTHERWISE STATED.

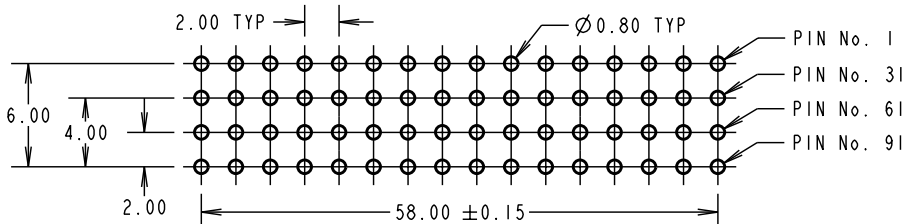

ORDER CODE:
M22-6023042
 No. OF WAYS PER ROW: 30
FINISH:
 42 = SELECTIVE GOLD + 100% TIN

CP	6	14.12.09	10582
NAME	ISS.	DATE	C/NOTE
APPROVED: C.PENROSE			
CHECKED: R.ADDE			
DRAWN: D.BECK			
CUSTOMER REF.:			
ASSEMBLY DRG:			



HARWIN USA
 TEL: 603 893 5376
 FAX: 603 893 5396
 mis@harwin.com

HARWIN Europe (UK)
 TEL: 023 9231 4545
 FAX: 023 9231 4590
 mis@harwin.co.uk

HARWIN Asia
 TEL: +65 6 779 4909
 FAX: +65 6 779 3868
 mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X = ± 1mm
 X.X = ± 0.25mm
 X.XX = ± 0.10mm
 X.XXX = ± 0.01mm
 ANGLES = ± 5°
 UNLESS STATED

MATERIAL:
 SEE ABOVE

FINISH:
 SEE ABOVE

S/AREA:
 mm²

TITLE:
 PC104 PLUS POST HEADER

DRAWING NUMBER:
M22-60230XX

SHT 2 OF 2