

# POWERSTRIP 25 SYSTEM MPTC, MPSC SERIES

**MPTC Mates with: MPSC** 

**MPSC Mates with: MPTC** 

#### **SPECIFICATIONS**

For complete specifications see www.samtec.com?MPTC or www.samtec.com?MPSC

Insulator Material: Black LCP Terminal Material: Copper Alloy Plating: Sn or Au over 50u" (1.27um) Ni


Current Rating: Testing Now!
Operating Temp Range:
-55°C to +105°C **RoHS Compliant:** 

### **Processing:**

Yes

Max Processing Temp: 230°C for 60 seconds, or 260°C for 20 seconds 3x Lead-Free Solderable:

#### STACK HEIGHT




#### **APPLICATION** SPECIFIC OPTION


- Asymmetric power pin placement.
- 4, 8, 16, 36 and 48 total signal pins Call Samtec.

## ALSO AVAILABLE

· Right Angle. See MPTC-RA Series.

Note: Some sizes, styles and options are non-standard, non-returnable.

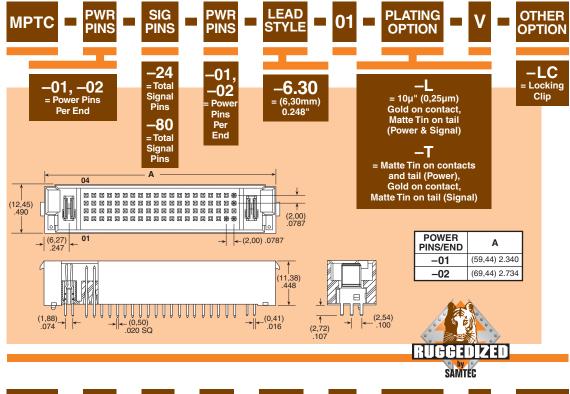

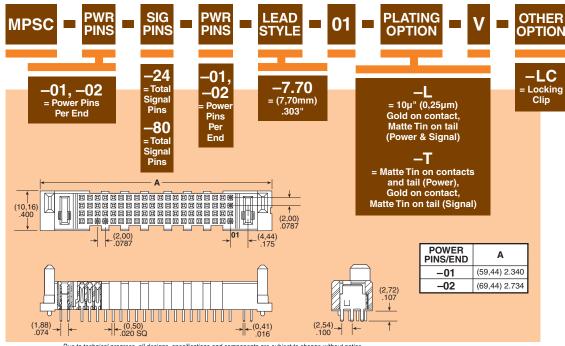

Due to technical progress, all designs, specifications and components are subject to change without notice.