

PRODUCT NUMBER DESCRIPTION :  
58102- X XX-XX - XX X XX

PLATING  
S = 0.38µm GOLD ON CONTACT AREA  
3.81µm TIN/LEAD ON TAIL  
G = 0.76µm GOLD ON CONTACT AREA  
3.81µm TIN/LEAD ON TAIL  
F = 0.20µm GOLD ON CONTACT AREA  
3.81µm TIN/LEAD ON TAIL




LF = ROHS COMPLIANT (SEE NOTE 10)  
BLANK = CONTAINS LEAD

RETENTION  
R: RETENTIVE LEG  
NOTES 6,7

POLARIZATION  
NOTE 7  
PACKAGING: = POLY BAGS  
(NOTE 5) U = TUBES

POSITIONS PER ROW = "N"  
(02 TO 25)

PIN STYLE	TAIL LENGTH
61	2.50

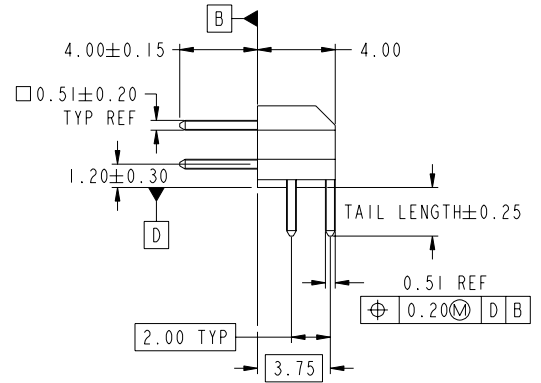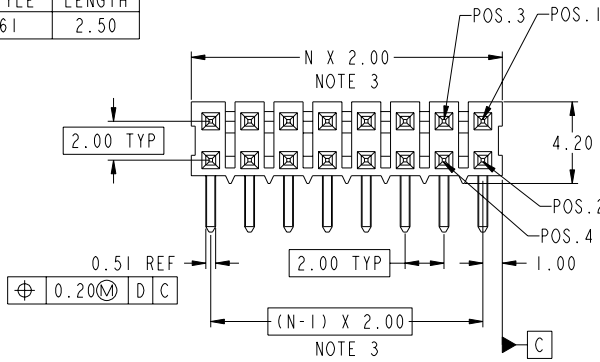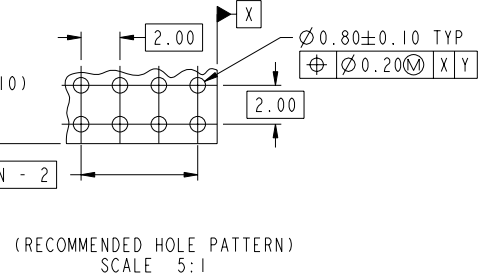

CONFIDENTIAL

www.fciconnect.com		surface - /	tolerance std	projection	MM
		ISO 1302	ISO 406 ISO 1101	⊕	←
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	T. BRUNGARD	1999-04-05	ANGULAR	size	A3
Eng	L. GREEN	1999-04-06	LINEAR	Scale	5:1
Chr	KH LEE	2009-11-20	0° ±3°	ECN	S10-0205
Appr	JOEY NG	2009-11-20	Product family	Spec ref	-
FCI		TITLE		dwg no	Rev.
		2.00mm UNSHROUDED HEADER		58102	G
		RIGHT ANGLE THRU-HOLE		CUSTOMER	sheet 1 of 2
		catalog no			

rev	ecn no	dr	date
E	S05-0037	KBM	2005-02-08
F	S06-0236	KHL	2006-07-17
G	S10-0205	N.B.R	2009-11-20
-	-	-	-
C	V11757	DAI	2001-06-27
D	V05-0098	DAI	2005-02-01

Copyright FCI.


REV. 2006-03-28

PDM: Rev:G STATUS:Released Printed: Dec 21, 2010

NOTES:

- ① MATERIAL HOUSING: HIGH TEMP. THERMOPLASTIC  
UL 94V-0, COLOR BLACK
- ② MATERIAL TERMINAL: COPPER ALLOY
- ③ TO DETERMINE DIMENSIONS:  
N=NUMBER OF POSITIONS PER ROW  
EX.: 10 POS., N x 2.00 = 20.00 TOTAL POSITIONS
- 4. 0.9kg MIN. PIN RETENTION IN EITHER DIRECTION.
- 5. PACKAGING:  
(A) STANDARD PACKAGING: IN POLY BAGS.  
(B) SPECIAL PACKAGING: IN TUBE.  
FOR ALL SPECIAL PACKAGING, FCI MUST BE CONTACTED FOR AVAILABILITY IN SIZE REQUESTED.
- ⑥ RETENTION LEG:  
2.3kg MAX INSERTION FORCE AND 1 kg MIN RETENTION FORCE PER RETENTIVE PIN USING 1.57 THICK CIRCUIT BOARD AND RECOMMENDED HOLE PATTERN. RETENTIVE LOCATION AT THE DISCRETION OF THE MANUFACTURER. RETENTION IS TWO PINS PER PART ADJACENT TO ONE ANOTHER.
- ⑦ FOR POLARIZATION, SPECIFY POSITION NUMBER, (i.e.: POS. 3 = 03) TO OMIT PIN. OMIT FROM PRODUCT NUMBER IF FEATURE IS NOT APPLICABLE.
- 8. THE HOUSING WILL WITHSTAND EXPOSURE TO 255°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- 9. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.57MM MINIMUM THICK CIRCUIT BOARD.
- ⑩ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- △ 11. A △ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

**CONFIDENTIAL**

www.fciconnect.com			surface - ✓ ISO 1302	tolerance std ISO 406 ISO 1101	projection MM
			TOLERANCES UNLESS OTHERWISE SPECIFIED		⊕
Dr	T. BRUNGARD	1999-04-05	ANGULAR	0.X ±0.5	size A3
Eng	L. GREEN	1999-04-06	LINEAR	0.XX ±0.25	Scale 10:1
Chr	KH LEE	2009-11-20	0° ±3°	0.XXX ±0.15	ECN S10-0205
Appr	JOEY NG	2009-11-20	Product family		- Spec ref -
 title 2.00mm UNSHROUDED HEADER RIGHT ANGLE THRU-HOLE			dwg no	58102	Rev. G
catalog no			CUSTOMER		sheet 2 of 2

REV E - 2006-03-28