


SPECIFICATIONS

- Current . 15 A at 20°
- Contact resistance ? 8 m?
- Insulation resistance · 10¹² ?
- Operating voltage 500 V VDE 0110 Gr.C
- Test voltage 3 kV , 50 Hz
- Mating force 90 N max
- Housing polycarbonate UL94V0
- Temperature range -65°C +125°C
- Contacts Copper alloy

Backpanel layout

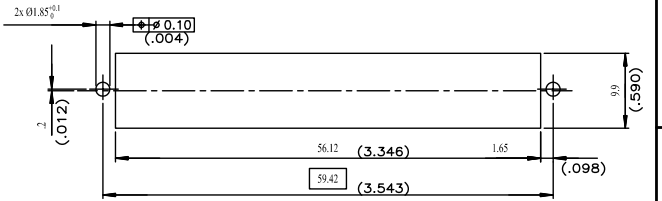

PERFORMANCES AS PER DIN 41612 H 15 CLASS 1

NOTE RoHS INFORMATION
 - The "LF" products meet European Union Directives and other country regulations as described in GS-22-008.
 -The product is not intended to be exposed to a manufacturing solder process.
 -Packaging spec: see GS-14-920

LEAD-FREE PART-NUMBER	6159	029	15	19	LF
STYLE	H				
NUMBER OF CONTACTS	15				
TERMINATION	Faston				
PLATING	Silver over nickel				
	Lead free over nickel				
	620				
	440				
LEAD-FREE					

dimensions in mm (inches)

European Views

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406	ISO 110	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED						Scale
Dr	PESSON	2006/02/21	ANGULAR	0.X	±0.1	size	A3	2.1
Eng	PESSON	2006/02/21	LINEAR	0.XX	±0.1	ECN	F10-0214	
Chr	LEGARE	2006/02/21	0.XX ±2	0.XXX	±0.1	Spec ref	-	
Appr	LEGARE	2006/02/21	Product family		DIN POWER			
FCI		RECEP 2 ROW STYLE H15		15 FASTON CONTACTS		Rev.	I	
catalog no		-		C01-5159-0008		CUSTOMER	sheet	1 of 1

REV F - 2008-04-17