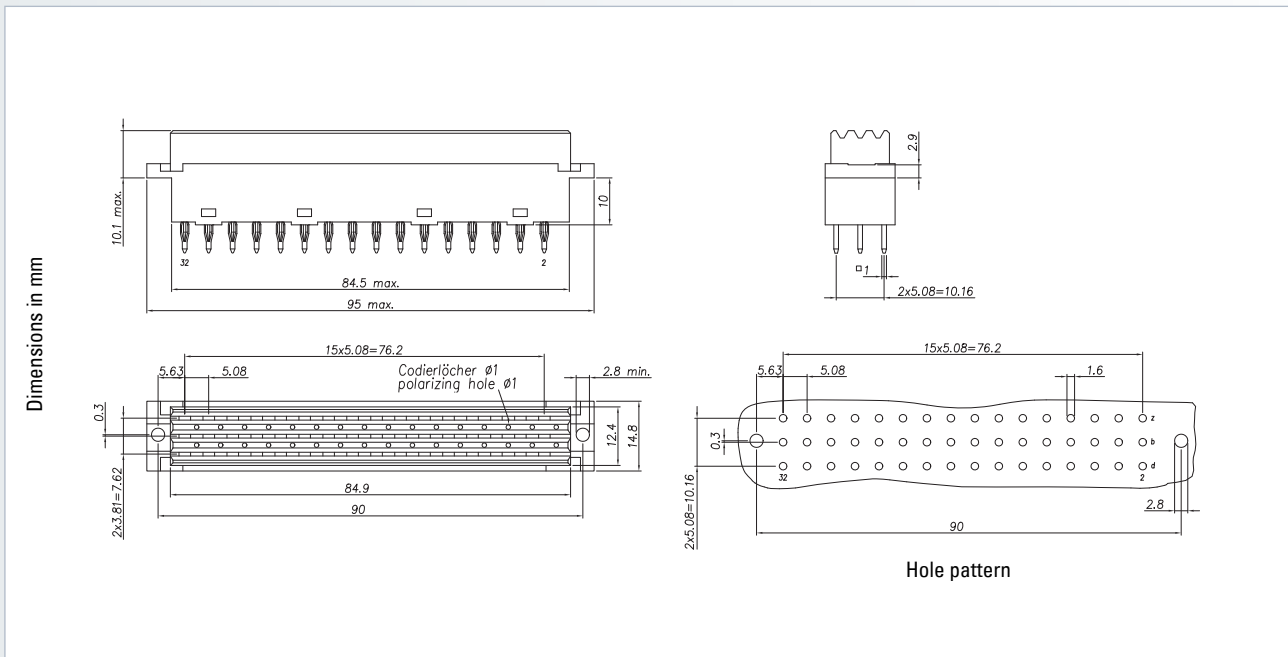


Connectors according to DIN 41612 / IEC 60603-2

Type F








Female connector



No. of contacts	Contact arrangement	Press-fit technology – Performance level II	
		Termination length	
		Part number	
32		110-60025	110-60024
32		110-60015	110-60014
48		110-60065	110-60064

Accessories <ul style="list-style-type: none"> – Press-fit tool (see page 208) – Support tool (see page 209) – Coding accessories (see page 160) 	On request <ul style="list-style-type: none"> – Performance level I + III or customer-specific – Special contact length 	Options <ul style="list-style-type: none"> – Special contact arrangement (see page 162)
--	--	---



No. of contacts	Contact arrangement	Solder technology – Performance level II			
		Termination length			
					Manual soldering with solder lug 
Part number					
32		110-40025	110-40024	110-40005	110-40026
32		110-40015	110-40014	110-40004	110-40016
48		110-40065	110-40064	110-40084	110-40066

Accessories – Coding accessories (see page 160)	On request – Performance level I + III or customer-specific – Special contact length – Also in THTR	Options – Special contact arrangement (see page 162)
---	---	--