
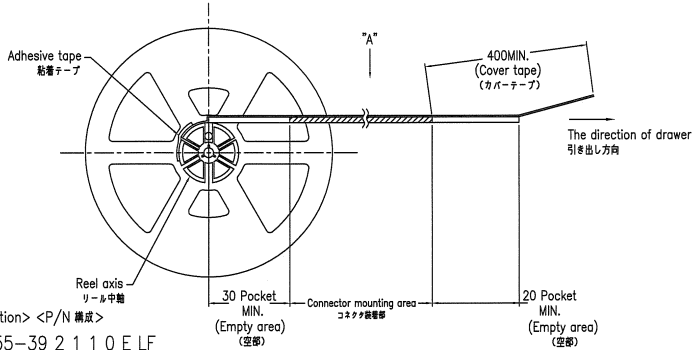





PRODUCT NO.  
10064555-XX2X10ELF

No.	Part name 部品名	Material 材質	QTY.	Note 備考
①	The reel for packaging 巻取りリール	Polyethylene ポリスチレン	1	Color : White, Electrification prevention processing 色:白、帯電防止処理
②	Emboss tape エンボステープ	PP or PET	1	Electrification prevention processing 帯電防止処理
③	Cover tape カバーテープ	Polyester ポリエステル	1	
④	Connector コネクタ	See sheet 2	3000	

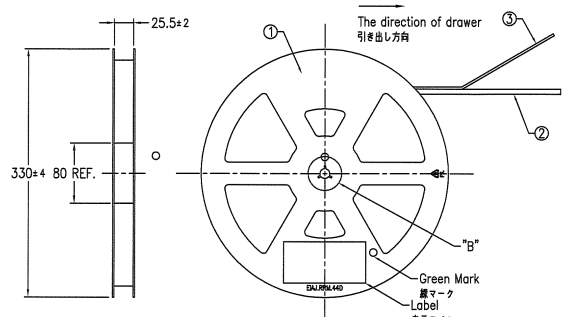


<P/N composition> <P/N 構成>  
10064555-39 2 1 1 0 E L F

- Lead Free
- Packaging form (E : Plastic reel-Embossing tape package)
- Embossing tape package 0: 8mm PITCH
- 1: 12mm PITCH
- Plating spec 1: Au plating
- TYPES OF PRODUCT 1: SMT / WITH CABLE LOCK
- 2: SMT / WITHOUT CABLE LOCK
- Contact Side 2: UPPER SIDE
- No of position
- Series name

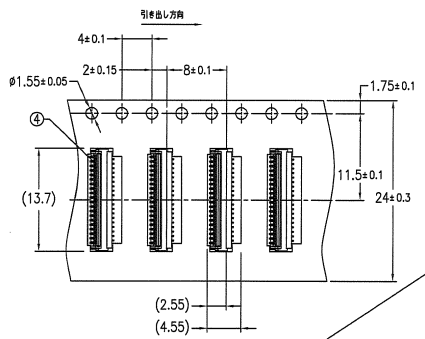


NOTE  
1. This article carries out the emboss tape package of the P/N10064555 series connector.  
2. The shape and dimension of this article are based on JIS C 0806.  
(Taping of electronic parts (Surface mounted device))

注 記  
1. 本品は P/N10064555シリーズをエンボステープ梱包したものである。  
2. 本品の形状及び寸法規定は JIS C 0806 (電子部品のテーピング (表面実装部品)) に準拠する。





mat'l. code		surface		tolerance		projection		product family		CODE	
---		ISO 1302		ISO 406		MM		589F FLEX 0.3		JP	
ltr		description		ecn no		dr		date		title	
A		RELEASED		J08-0368		Y.K		09/08/06		ASSEMBLY	
B		REVISED		J07-0472		Y.K		2007-9-21		0.3mm PITCH CONNECTOR FOR FPC	
C		ADD NEW P/N		J08-0064		Y.K		2008-2-12		YLL-U Series	
D		ADD NEW P/N		J08-0419		Y.K		2008-10-29		sheet 1 of 3 size	
						enr		Y.KAMEDA		2008-10-29	
						chr		H.S. YAMAZAKI		2008-10-29	
						appd		H.S. YAMAZAKI		2008-10-29	
sheet index		revision sheet		D		D		D		Rev. D	
1		1		2		3					

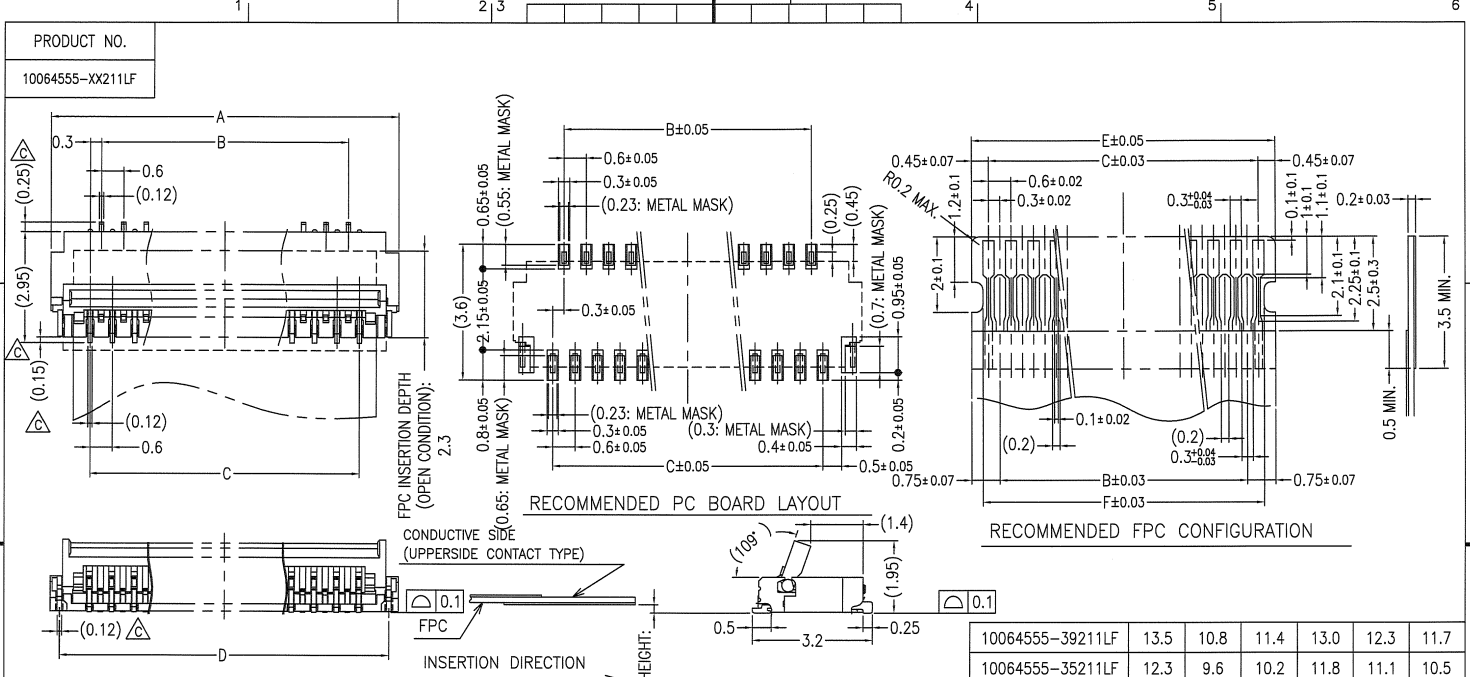

**NOTE**  
 1. MATERIAL  
 1) HOUSING: THERMOPLASTIC RESIN, UL94V-0, BLACK  
 2) ACTUATOR: THERMOPLASTIC RESIN, UL94V-0, BEIGE  
 3) CONTACT: COPPER ALLOY  
 4) FIXING TAB: COPPER ALLOY  
 2. FINISH  
 1) CONTACT: ALL OVER Ni (CONTACT AREA) Au FLASH, (SOLDER TAIL AREA) Au FLASH.  
 2) FIXING TAB: ALL OVER Ni, Sn PLATING 1.5~3.5μm  
 3. CO-PLANARITY: 0.1 MAX.  
 4. THICKNESS OF A METAL MASK: 0.1mm  
 5. FPC  
 1) ADHESIVE METHOD OF SUPPORTING TAPE SHALL BE HEAT CRIMPING METHOD AND THERMOSETTING ADHESIVE MATERIAL SHALL BE USED.  
 6. PRODUCT  
 1) \* MARK ITEM IS REFERENCE.  
 2) RECOMMENDED PCB LAYOUT and FPC ARE THE SAME AS 10061122-\*\*1110ELF(YLL-DOWN CONTACT TYPE).  
 7. OTHER  
 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

P/N	A	B	C	D	E	F
10064555-39211LF	13.5	10.8	11.4	13.0	12.3	11.7
10064555-35211LF	12.3	9.6	10.2	11.8	11.1	10.5
10064555-33211LF	11.7	9	9.6	11.2	10.5	9.9
10064555-31211LF	11.1	8.4	9	10.6	9.9	9.3
10064555-25211LF	9.3	6.6	7.2	8.8	8.1	7.5
10064555-21211LF	8.1	5.4	6.0	7.6	6.9	6.3
10064555-15211LF	6.3	3.6	4.2	5.8	5.1	4.5

mat'l. code	---	surface	ISO 1302	tolerance	ISO 408	projection	MM	product family	589F FLEX 0.3	CODE	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified	angles	linear	title	ASSEMBLY		
A	RELEASED	J08-0368	Y.K	09/08/08	0.X ±0.2			0.3mm PITCH CONNECTOR FOR FPC			
B	REVISED	J07-0472	Y.K	2007-9-21	0.XX ±0.2	0°±2'		YLL-U Series			
C	ADD NEW P/N	J08-0064	Y.K	2008-2-12	0.XXX ±0.2		scale 10:1				
D	ADD NEW P/N	J08-0419	Y.K	2008-10-29				dwg no	10064555	sheet 2 of 3 size	A3
								type	Product Customer Drawing		Rev. D

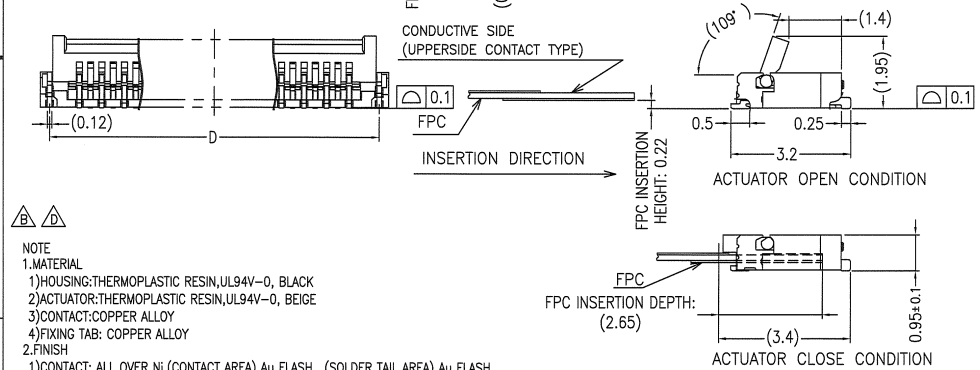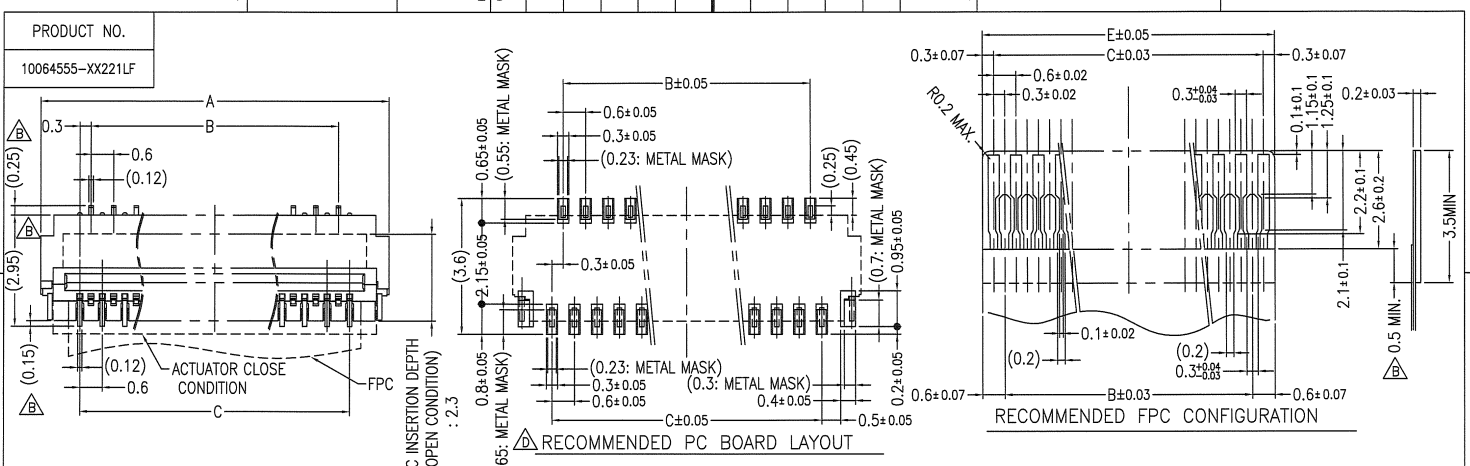

10064555-41221LF	14.1	11.4	12.0	13.6	12.6
10064555-39221LF	13.5	10.8	11.4	13.0	12.0
10064555-37221LF	12.9	10.2	10.8	12.4	11.4
10064555-33221LF	11.7	9	9.6	11.2	10.2
10064555-27221LF	9.9	7.2	7.8	9.4	8.4
10064555-25221LF	9.3	6.6	7.2	8.8	7.8
10064555-23221LF	8.7	6	6.6	8.2	7.2
10064555-21221LF	8.1	5.4	6.0	7.6	6.6

NOTE

1. MATERIAL  
 1) HOUSING: THERMOPLASTIC RESIN, UL94V-0, BLACK  
 2) ACTUATOR: THERMOPLASTIC RESIN, UL94V-0, BEIGE  
 3) CONTACT: COPPER ALLOY  
 4) FIXING TAB: COPPER ALLOY  
 2. FINISH  
 1) CONTACT: ALL OVER Ni (CONTACT AREA) Au FLASH. (SOLDER TAIL AREA) Au FLASH.  
 2) FIXING TAB: ALL OVER Ni, Sn PLATING 1.5~3.5μm  
 3. CO-PLANARITY: 0.1 MAX.  
 4. THICKNESS OF A METAL MASK: 0.1mm  
 5. FPC  
 1) ADHESIVE METHOD OF SUPPORTING TAPE SHALL BE HEAT CRIMPING METHOD AND THERMOSETTING ADHESIVE MATERIAL SHALL BE USED.  
 6. PRODUCT  
 1) RECOMMENDED PCB LAYOUT and FPC ARE THE SAME AS 10061122-\*\*\*1110ELF(YLL-DOWN CONTACT TYPE).  
 7. OTHER  
 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

mat'l. code	---	surface	ISO 1302	tolerance	ISO 406	projection	product family	CODE
ltr	description	ecn no	dr	date	tolerances unless otherwise specified	MM	589F FLEX 0.3	JP
A	RELEASED	J07-0472	Y.K	2007-9-21	angles	linear	title	ASSEMBLY
B	REVISED	J08-0064	Y.K	2008-2-12	0°±2'	0.XX ±0.2	0.3mm PITCH CONNECTOR FOR FPC	
C	ONLY REV. UP		Y.K		0.XXX ±0.2	scale 10:1	YLL-U Series	
D	REVISED	J08-0419	Y.K	2008-10-29			dwg no	sheet 3 of 3 size
					Y.KAMEDA	2008-10-29	10064555	A3
					enr	Y.KAMEDA	2008-10-29	
					chr	Y.KAMEDA	2008-10-29	
					appd	Y.KAMEDA	2008-10-29	
sheet index	revision sheet						type	Product Customer Drawing
							Rev.	D