


PART NO.

2317SB - Series

REVISIONS								
ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	RELEASED	Kiran	24/03/09	Veena	24/03/09	Farnell	07/04/09

RoHŞ Compliant

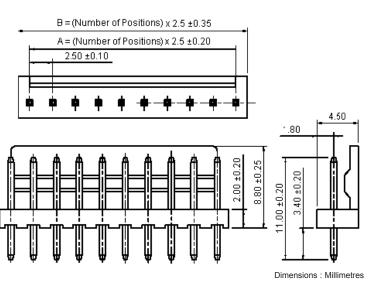

Specifications:

 $\begin{tabular}{lll} $\text{Current rating} & : 3.0A & \text{ac/dc.} \\ $\text{Voltage rating} & : 250V & \text{ac/dc.} \\ $\text{Maximum contact resistance} & : 20m\Omega. \\ \\ $\text{Minimum insulation resistance} & : 1000M\Omega. \\ \end{tabular}$

Withstanding voltage : 1000V ac for one minute.


Operating temperature range **Material and Finish:**

Insulator : High temperature plastic (Nylon 66).

: -40°C to +85°C

Insulator Colour : Copper alloy. Plated : Tin plated.

PCB Layout



has data affect and its contents (the information of people of the "merriter praint" collection (formation purposes in connection with the products to which it relates. No licensor any intellectual properly rights is granted. The Information is subject to change with notice and replaces all data sheets previously supplied. The Information supplied is elieved to be accurate but the Group assumes no responsibility for its accuracy or morpheteness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the production of the

TOLERANCES:

UNLESS OTHERWISE
SPECIFIED,
DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

 DRAWN BY:
 DATE:

 Kiran
 24/03/09

 CHECKED BY:
 DATE:

 Veena
 24/03/09

 APPROVED BY:
 DATE:

 Farnell
 07/04/09



PART NO.

2317SB - Series


		REVISIONS						
ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	RELEASED	Kiran	24/03/09	Veena	24/03/09	Farnell	07/04/09

Specification Table

Number of Positions	Dimension A	Dimension B	Part Number
2	2.50	5.00	2317SB-02
3	5.00	7.50	2317SB-03
4	7.50	10.00	2317SB-04
5	10.00	12.50	2317SB-05
6	12.50	15.00	2317SB-06
8	17.50	20.00	2317SB-08
10	22.50	25.00	2317SB-10
12	27.50	30.00	2317SB-12

Dimensions : Millimetres

Part Number Explanation:



Number of Positions: 02 = 2, 03 = 3, 04 = 4, 05 = 5, 06 = 6, 08 = 8, 10 and 12 Positions.

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

This data sheet and its contents (the "Information") belong to the Premier Famell Group (the 'Group') or are licensed to It. No licence is granted for the use of them than for information purposes in connection with the products to which it relates. No licence or any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or detection of the product of the product of the property of the product of the property of the product of the property of the product of the pro

	TOLERANCES:
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.
	SPECIFIED,
	DIMENSIONS ARE
	FOR REFERENCE
	PURPOSES ONLY.
ı	

DRAWN BY:	DATE:
Kiran	24/03/09
CHECKED BY:	DATE:
Veena	24/03/09
APPROVED BY:	DATE:
Farnell	07/04/09

DRAWING TITLE:				
		2	2.5mm Header - V	
SIZE A	DWG NO.	M10001976		
SCALE: NTS			U.O.M.: mm	