


PART NO.

34E068S-328 Series

REVISIONS								
ECN #	N # REV DESCRIPTION		DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	RELEASED	Kiran	09/05/09	Suresh	09/05/09	Farnell	25/05/09

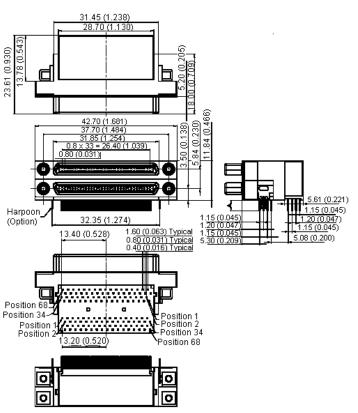

RoHS Compliant

Specifications:

Rated current : 0.30A/contact. Minimum insulation resistance : $500M\Omega$.

Dielectric withstanding voltage : 250V ac for 1 minute.

Operating temperature : -25° to +85°C.

Material:

Housing : Thermoplastic.
Cover : Thermoplastic.

Contacts : Copper alloy, selective gold plated.

Shell : SPCC, nickel plated. Harpoon : Copper alloy, tin over nickel.

Dimensions : Millimetres (Inches)

the 'Group') or are licensed to ft. No licence is granted for the use of it other than for formation purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change with undice and replaces all data sheets previously supplied. The Information supplied is seleleved to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this latal sheet should check for themselves the Information and the suitability of the prodcise of their purpose and not make any assumptions based on information included or see of 4 fincluding liability resulting from negligence or where the Group was swere of the possibility of such loss or damage arinsing) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SCM MULTICOMP be the registered trademarks of the Group. Permier Farral lipe 2005.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

TOLERANCES:

 DRAWN BY:
 DATE:

 Kiran
 09/05/09

 CHECKED BY:
 DATE:

 Suresh
 09/05/09

 APPROVED BY:
 DATE:


 Farnell
 25/05/09



PART NO.

34E068S-328 Series

	REVISIONS								
	ECN #	CN # REV DESCRIPTION		DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	-	Α	RELEASED		09/05/09	Suresh	09/05/09	Farnell	25/05/09
Γ									

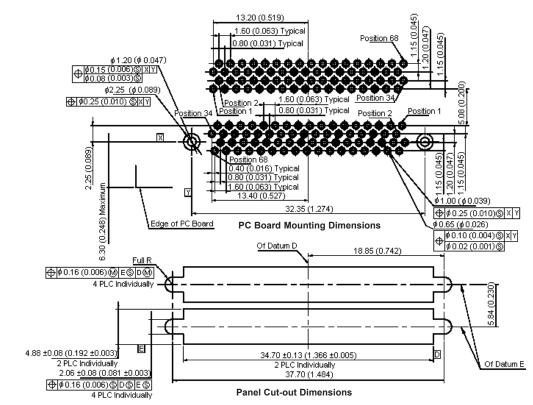

Dimensions: Millimetres (Inches)

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY: DATE: Kiran 09/05/09 CHECKED BY: DATE: Suresh 09/05/09 APPROVED BY: DATE: Farnell 25/05/09

DRAWING TITLE: Socket - VHDCI, Stacked, 2 x 68W SIZE DWG NO. M10002210 SCALE: NTS U.O.M.: mm (Inches)

ELECTRONIC FILE REV 1428255-TDS_DWG Α SHEET: 2



PART NO.


34E068S-328 Series

		REVISIONS						
ECN #	ECN # REV DESCRIPTION		DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	A RELEASED		09/05/09	Suresh	09/05/09	Farnell	25/05/09

Part Number Table

Description	Part Number		
Socket, VHDCI, Stacked, 2 x 68W	34E068S-328H-AD		
Socket, VIIDOI, Stacked, 2 x 000V	34E068S-328W-BB		

Part Number Explanation:



Series Number : 34E = Champ 0.80mm Stacked R/A P.C.B Type.

Number of Positions : 068 = 68 Positions. **Contact Codes** : S = Socket. **Colour Codes** : 3 = Black.

Contact Finish : 2 = Selective Gold 15μ Inches Over 50μ Inches Nickel.

Shell Type and Finish : 8 = Metal Shell Type and Nickel Plated.

: H = With Separated M2 x 0.4 Screws, W = Without Screws and Harpoons. **Accessory Type**

: AD = With Freeport LOGO, Solder Tail A = 3.20 (0.126), BB = Without Freeport LOGO, Solder Tail A = 2.28 (0.090). Suffix Number

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

1	DRAWN BY:	DATE:	DRAW	ING TITLE:
	Kiran	09/05/09]	
	CHECKED BY:	DATE:	SIZE	DWG NO
	Suresh	09/05/09	A	2
	APPROVED BY:	DATE:	 	
	Farnell	25/05/09	SCALE: NTS	
-				

		acked	l, 2 x 68	W		
SIZE	DWG NO.	M10002210			TRONIC FII 255-TDS	
SCALE: NTS		U.O.M.: mm (Inches)		SHEET:	3	