

Number of contacts


14-40

150-256

150-257

150-258

150-259

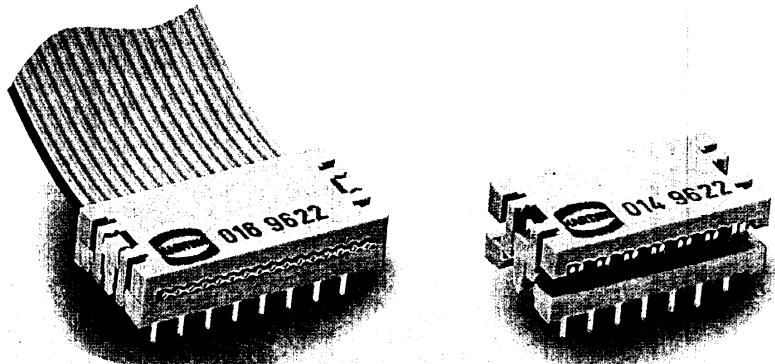


DIP connector for IC base or for soldering onto p.c. boards


DIP connector

09 17 014 9622
 09 17 016 9622
 09 17 024 9622
 09 17 028 9622
 09 17 040 9622

| A | B | C | D |
|------|-------------------|------|-------|
| 20,5 | 2,54 x 6 = 15,24 | 11 | 7,62 |
| 23,0 | 2,54 x 7 = 17,78 | 11 | 7,62 |
| 33,0 | 2,54 x 11 = 27,94 | 18,7 | 15,24 |
| 38,1 | 2,54 x 13 = 33,02 | 18,7 | 15,24 |
| 53,3 | 2,54 x 19 = 48,26 | 18,7 | 15,24 |

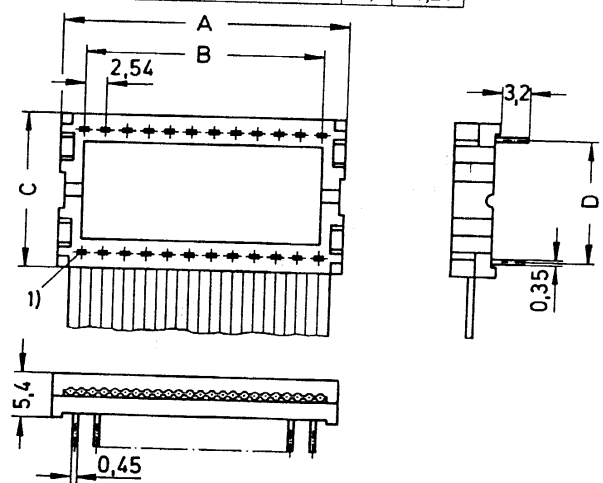

P.C. board layout

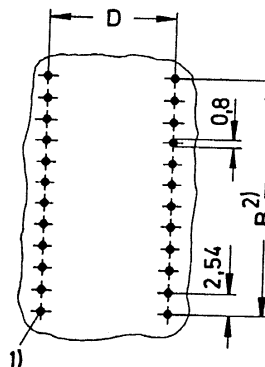

1) Lead number 1
 2) Pitch tolerance: ± 0.1