
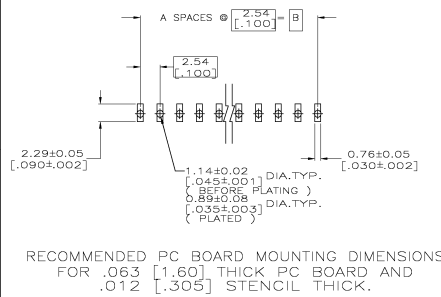


- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- △ 0.00254-0.00504 [.000100- .000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
 △ HOUSING: LCP, COLOR-BLACK, POSTS: PHOSPHOR BRONZE.
 △ 0.00254-0.00504 [.000100- .000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.

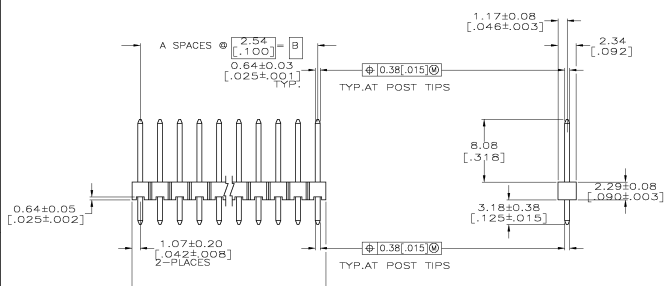

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
	101.19	99.06	39	40	9-146274-0
	98.55	96.52	38	39	8-146274-9
	96.11	93.98	37	38	8-146274-8
	93.78	91.44	36	37	8-146274-7
	91.03	88.90	35	36	8-146274-6
	88.49	86.36	34	35	8-146274-5
	85.95	83.82	33	34	8-146274-4
	83.41	81.28	32	33	8-146274-3
	80.87	78.74	31	32	8-146274-2
	78.33	76.20	30	31	8-146274-1
	75.79	73.66	29	30	8-146274-0
	73.25	71.12	28	29	7-146274-9
	70.71	68.58	27	28	7-146274-8
	68.17	66.04	26	27	7-146274-7
	65.63	63.5	25	26	7-146274-6
	63.09	60.96	24	25	7-146274-5
	60.55	58.42	23	24	7-146274-4
	58.01	55.88	22	23	7-146274-3
	55.47	53.34	21	22	7-146274-2
	52.93	50.80	20	21	7-146274-1
	50.39	48.26	19	20	7-146274-0
	47.85	45.72	18	19	6-146274-9
	45.31	43.18	17	18	6-146274-8
	42.77	40.64	16	17	6-146274-7
	40.23	38.10	15	16	6-146274-6
	37.69	35.56	14	15	6-146274-5
	35.15	33.02	13	14	6-146274-4
	32.61	30.48	12	13	6-146274-3
	30.07	27.94	11	12	6-146274-2
	27.53	25.40	10	11	6-146274-1
	24.99	22.86	9	10	6-146274-0
	22.45	20.32	8	9	5-146274-9
	19.91	17.78	7	8	5-146274-8
	17.37	15.24	6	7	5-146274-7
	14.83	12.70	5	6	5-146274-6
	12.29	10.16	4	5	5-146274-5
	9.75	7.62	3	4	5-146274-4
	7.21	5.08	2	3	5-146274-3
	4.67	2.54	1	2	5-146274-2
	2.13	0	0	1	5-146274-1

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
	101.19	99.06	39	40	4-146274-0
	98.55	96.52	38	39	3-146274-9
	96.11	93.98	37	38	3-146274-8
	93.78	91.44	36	37	3-146274-7
	91.03	88.90	35	36	3-146274-6
	88.49	86.36	34	35	3-146274-5
	85.95	83.82	33	34	3-146274-4
	83.41	81.28	32	33	3-146274-3
	80.87	78.74	31	32	3-146274-2
	78.33	76.20	30	31	3-146274-1
	75.79	73.66	29	30	3-146274-0
	73.25	71.12	28	29	2-146274-9
	70.71	68.58	27	28	2-146274-8
	68.17	66.04	26	27	2-146274-7
	65.63	63.5	25	26	2-146274-6
	63.09	60.96	24	25	2-146274-5
	60.55	58.42	23	24	2-146274-4
	58.01	55.88	22	23	2-146274-3
	55.47	53.34	21	22	2-146274-2
	52.93	50.80	20	21	2-146274-1
	50.39	48.26	19	20	2-146274-0
	47.85	45.72	18	19	1-146274-9
	45.31	43.18	17	18	1-146274-8
	42.77	40.64	16	17	1-146274-7
	40.23	38.10	15	16	1-146274-6
	37.69	35.56	14	15	1-146274-5
	35.15	33.02	13	14	1-146274-4
	32.61	30.48	12	13	1-146274-3
	30.07	27.94	11	12	1-146274-2
	27.53	25.40	10	11	1-146274-1
	24.99	22.86	9	10	1-146274-0
	22.45	20.32	8	9	146274-9
	19.91	17.78	7	8	146274-8
	17.37	15.24	6	7	146274-7
	14.83	12.70	5	6	146274-6
	12.29	10.16	4	5	146274-5
	9.75	7.62	3	4	146274-4
	7.21	5.08	2	3	146274-3
	4.67	2.54	1	2	146274-2
	2.13	0	0	1	146274-1

THIS DRAWING IS A CONTROLLED DOCUMENT. SEE TABLE FOR IDENTIFICATION.

DRAWING NO. 100779
 SUBSIDIARY: 100779
 DATE: 01/10/01
 WEIGHT: 1.1g
 MATERIAL: LCP, COLOR-BLACK, POSTS: PHOSPHOR BRONZE
 FINISH: MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.

CUSTOMER DRAWING: A100779C=146274
 REV: 4.1
 DATE: 11/15/00
 BY: MB
 CHECKED: JG