





SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVIEWS		REVISIONS		DOC. NO.	SPC-F005	*	Effective:	7/8/02	*	DCP No.:	1398
DCP #	REV	DESCRIPTION	DATE	DRAWN	CHECKD	DATE	APPRD	DATE			
XX	XX	XXXX	XXXX	XXXX	XXXX	03-10-08	XXXX	03-10-08	XXXX	XXXX	06-10-08
XXXX	XXXX		XXXX	XXXX	XXXX	06-10-08	XXXX	06-10-08	XXXX	XXXX	06-10-08

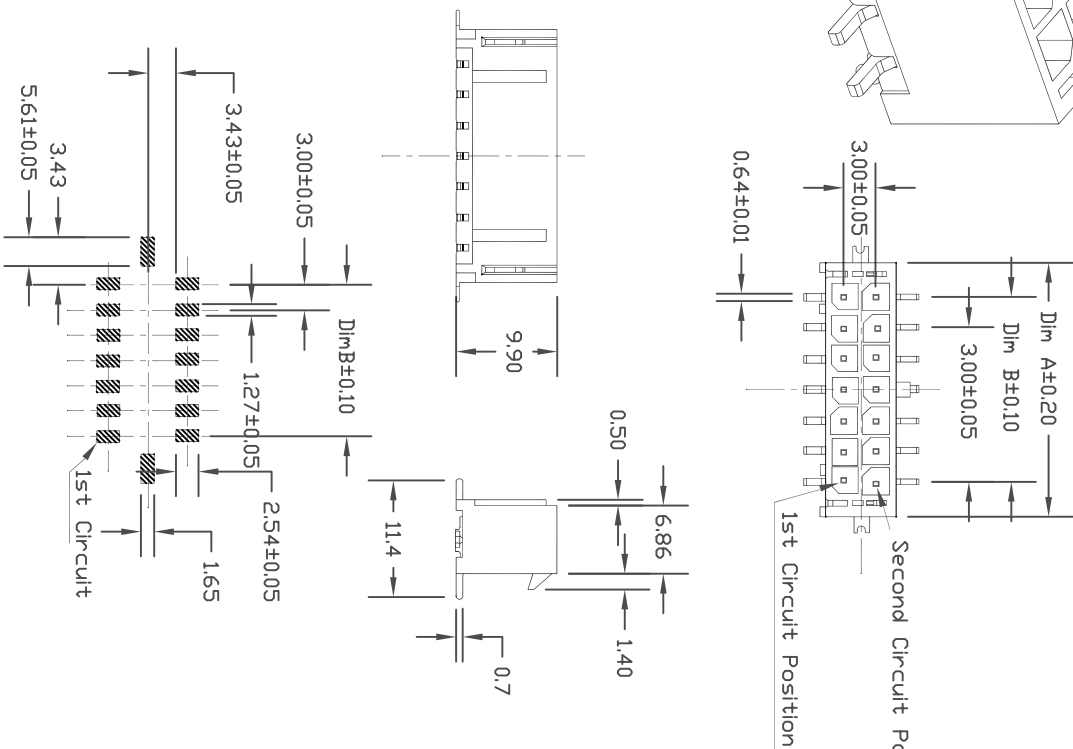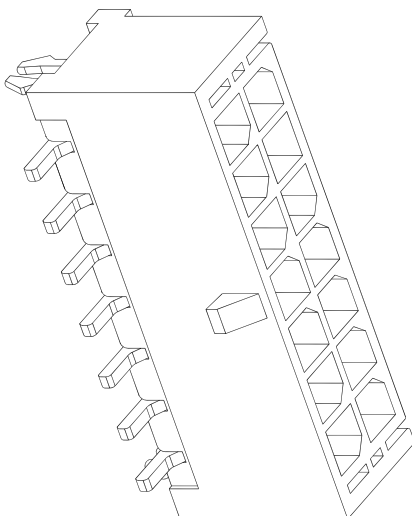

Specifications

- Current Rating : 5.0A AC/DC
- Voltage Rating : 250V AC/DC
- Contact Resistance : 10m ohm. max.
- Insulation Resistance : 1000M ohm. Min.
- Withstanding Voltage : 1500V AC for one minute
- Operating Temperature Range : -25°C to +105°C

Material and Finish

- Wafer Insulator : High Temp Plastic (UL94V-0)
- Contact Pin : Copper Alloy Tin Plated

Connection

- 5561S-XXT-SM (SM1) Mates With 5560-XX

Engineering Dimension

Positions	Dim A.	Dim B.
10	18.70	12.00

Ordering Information

5561S-10T-SM1

① ② ③ ④

1 R Right Angle Type	2 No. of Contacts	3 T. Tin Plated	4 SM1 W/Metal Tab Type



DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

TOLERANCES:		DRAWING TITLE:	
DRAWN BY:	XXXX	DATE:	03-10-08
CHECKED BY:	XXXX	DATE:	03-10-08
APPROVED BY:	XXXX	DATE:	03-10-08

DRAWING TITLE:			
Wafer Connectors			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	2261(5561)S-10T-SM1	02N4666	XX
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1