







SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVIEWS		REVISIONS		DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398				
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKED	DATE	APPRD	DATE
XX	XX	XXXX	XXXX	02-10-08	XXXX	02-10-08	XXXX	02-10-08
XXXX	XXXX		XXXX	02-10-08	XXXX	02-10-08	XXXX	02-10-08

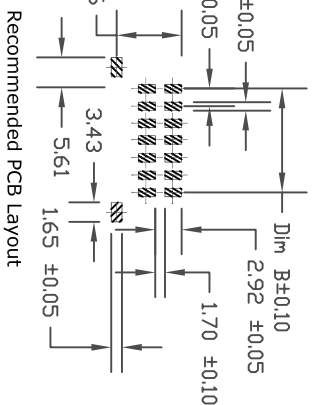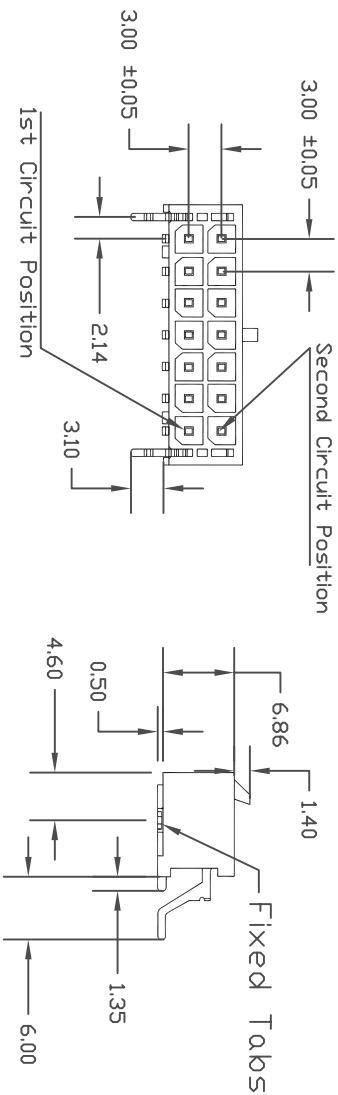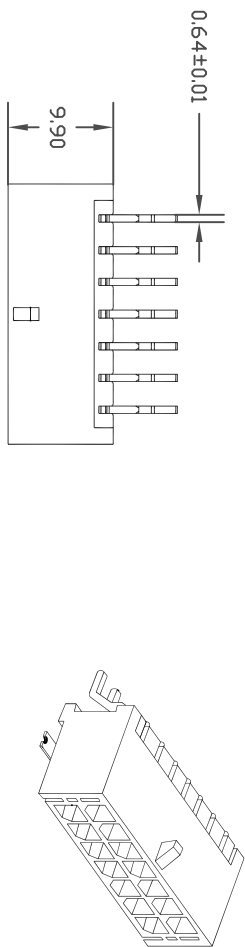

Recommended PCB Layout

- Specifications
 - Current Rating : 50A AC/DC
 - Voltage Rating : 250V AC/DC
 - Contact Resistance : 10m ohm, maximum
 - Insulation Resistance : 1000M ohm, Minute.
 - Operating Temperature Range : -25°C to +105°C

- Material and Finish
 - Wafer Insulator : High Temp Plastic (UL94V-0)
 - Contact Pln : Copper Alloy Tin Plated

- Connection
 - 5561R-XXT-SM (SM1) (SM2) Mates With 5560-XX

- Engineering Dimension

Positions	Dim. A	Dim. B
2	6.70	-

- Ordering Information

2261(5561)R-02T-SM1
① ② ③ ④

1 R Right Angle Type	2 No. of Positions	3. T. Tin Plated	4 SHL V/Metal Tab



RoHS
Compliant

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
XXXX	02-10-08
CHECKED BY:	DATE:
XXXX	02-10-08
APPROVED BY:	DATE:
XXXX	02-10-08

DRAWING TITLE:

Plug and Socket

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	2261(5561)R-02T-SM1	02N4636	XX
SCALE:	U.O.M.: INCHES [mm]	SHEET:	OF 1
NTS		1	1