







SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.
SPC-F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			AMU	16-08-10	JAG	18-08-10	XXX	25-08-10

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

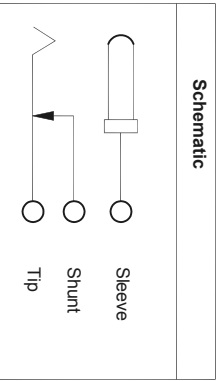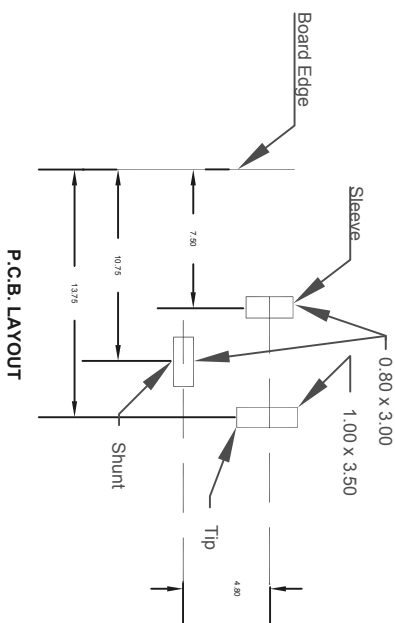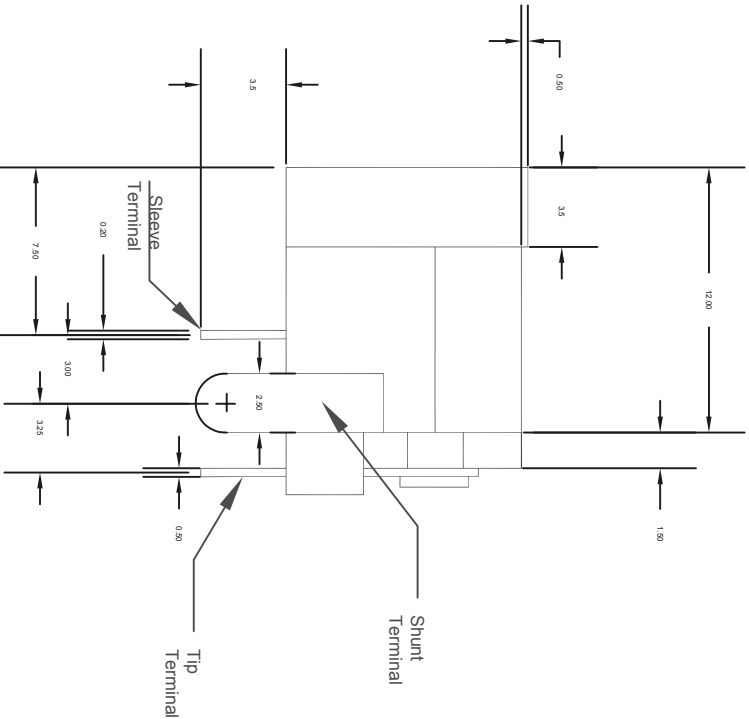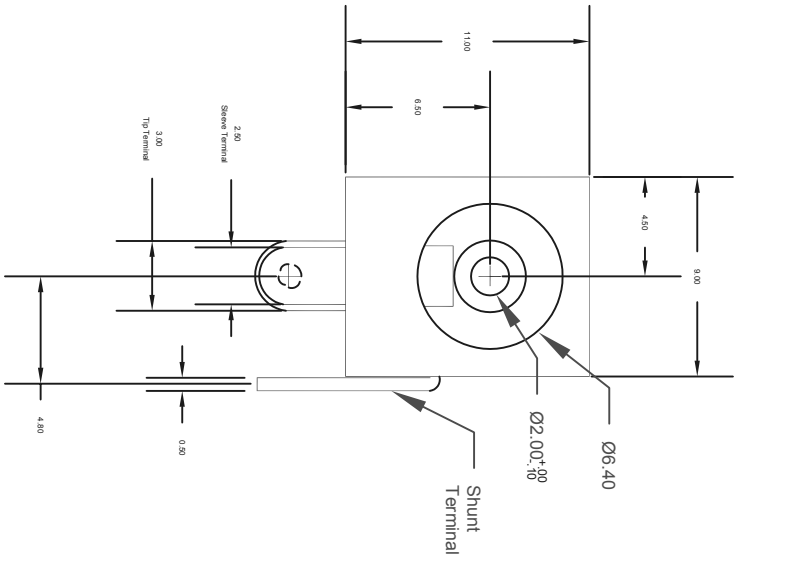

Specifications:

- Electrical
 - Contact rating: 5A at 16VDC
 - Contact Resistance: 30 milliohms maximum
 - Insulation Resistance: 100 Megohms Minimum at 500VDC
 - Dielectric Strength: 500VAC
- Mechanical
 - Insertion Force: 0.30 to 3.0kg
 - Withdrawal Force: 0.30 to 3.0kg
 - Operating Life: 5,000 cycles

Dimensions : Inches (mm)
Part Number Table

Description	Part Number
Power Jack	SPC21364

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWING TITLE:

Power Jack

DRAWN BY:	AMU	DATE:	16-08-10
CHECKED BY:	JAG	DATE:	18-08-10
APPROVED BY:	XXX	DATE:	25-08-10

SIZE	DWG. NO.	ELECTRONIC FILE	REV
XXX	XXX	84N1161	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.