

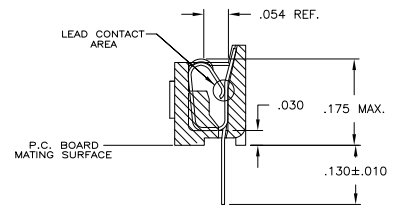


**SECTION A-A**  
 ROTATED 90° CW  
 SCALE 10:1  
 FOR -6, -7 & -8 ONLY

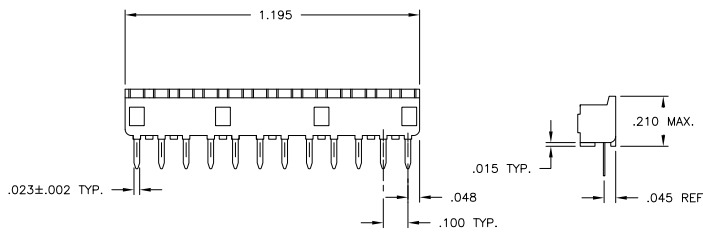

**SECTION A-A**  
 ROTATED 90° CW  
 SCALE 10:1  
 FOR -1, -2 & -3 ONLY



- RECEPTACLE ACCEPTS AN .008-.014 THK. I.C. LEAD.
- TWO .000030 MIN. THK. GOLD STRIPES IN CONTACT AREA, TIN-LEAD(93-7) ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
- TWO .000015 MIN. THK. GOLD STRIPES IN CONTACT AREA, TIN-LEAD(93-7) ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
- TUBE LOADED.

CONTACT FINISH	CONTACT MAT'L	HOUSING MATERIAL	PART NO.
OBSOLETE	TINNED	PHOS. BRZ. GLASS-FILLED THERMOPLASTIC, 94V-0, BLACK	2-643644-3
OBSOLETE	TINNED	PHOS. BRZ. GLASS-FILLED THERMOPLASTIC, 94V-0, BLACK	643644-8
OBSOLETE	TINNED	BE. CU. GLASS-FILLED THERMOPLASTIC, 94V-0, BLACK	643644-7
SUPSD BY 643644-2	TINNED	PHOS. BRZ. GLASS-FILLED THERMOPLASTIC, 94V-0, BLACK	643644-6
OBSOLETE	TINNED	PHOS. BRZ. GLASS-FILLED THERMOPLASTIC, 94V-0, BLACK	643644-4
OBSOLETE	TINNED	PHOS. BRZ. GLASS-FILLED THERMOPLASTIC, 94V-0, BLACK	643644-3
OBSOLETE	TINNED	BE. CU. GLASS-FILLED THERMOPLASTIC, 94V-0, BLACK	643644-2
OBSOLETE	TINNED	BE. CU. GLASS-FILLED THERMOPLASTIC, 94V-0, BLACK	643644-1

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 7-31-81

INCHES: DIMENSIONS: 108-1066

SOCKET ASSY, SIP, 12 POS, DIPLOMATE DL

DATE: 114-1049

SEE TABLE: A100779

CUSTOMER DRAWING: 643644

TE Connectivity