


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO. SPC-F005	DATE	DESCRIPTION	DATE	APP'D	DATE
DGP #	REV						
B44	A		01/04/02	Released	1/24/02	DJC	1/24/02

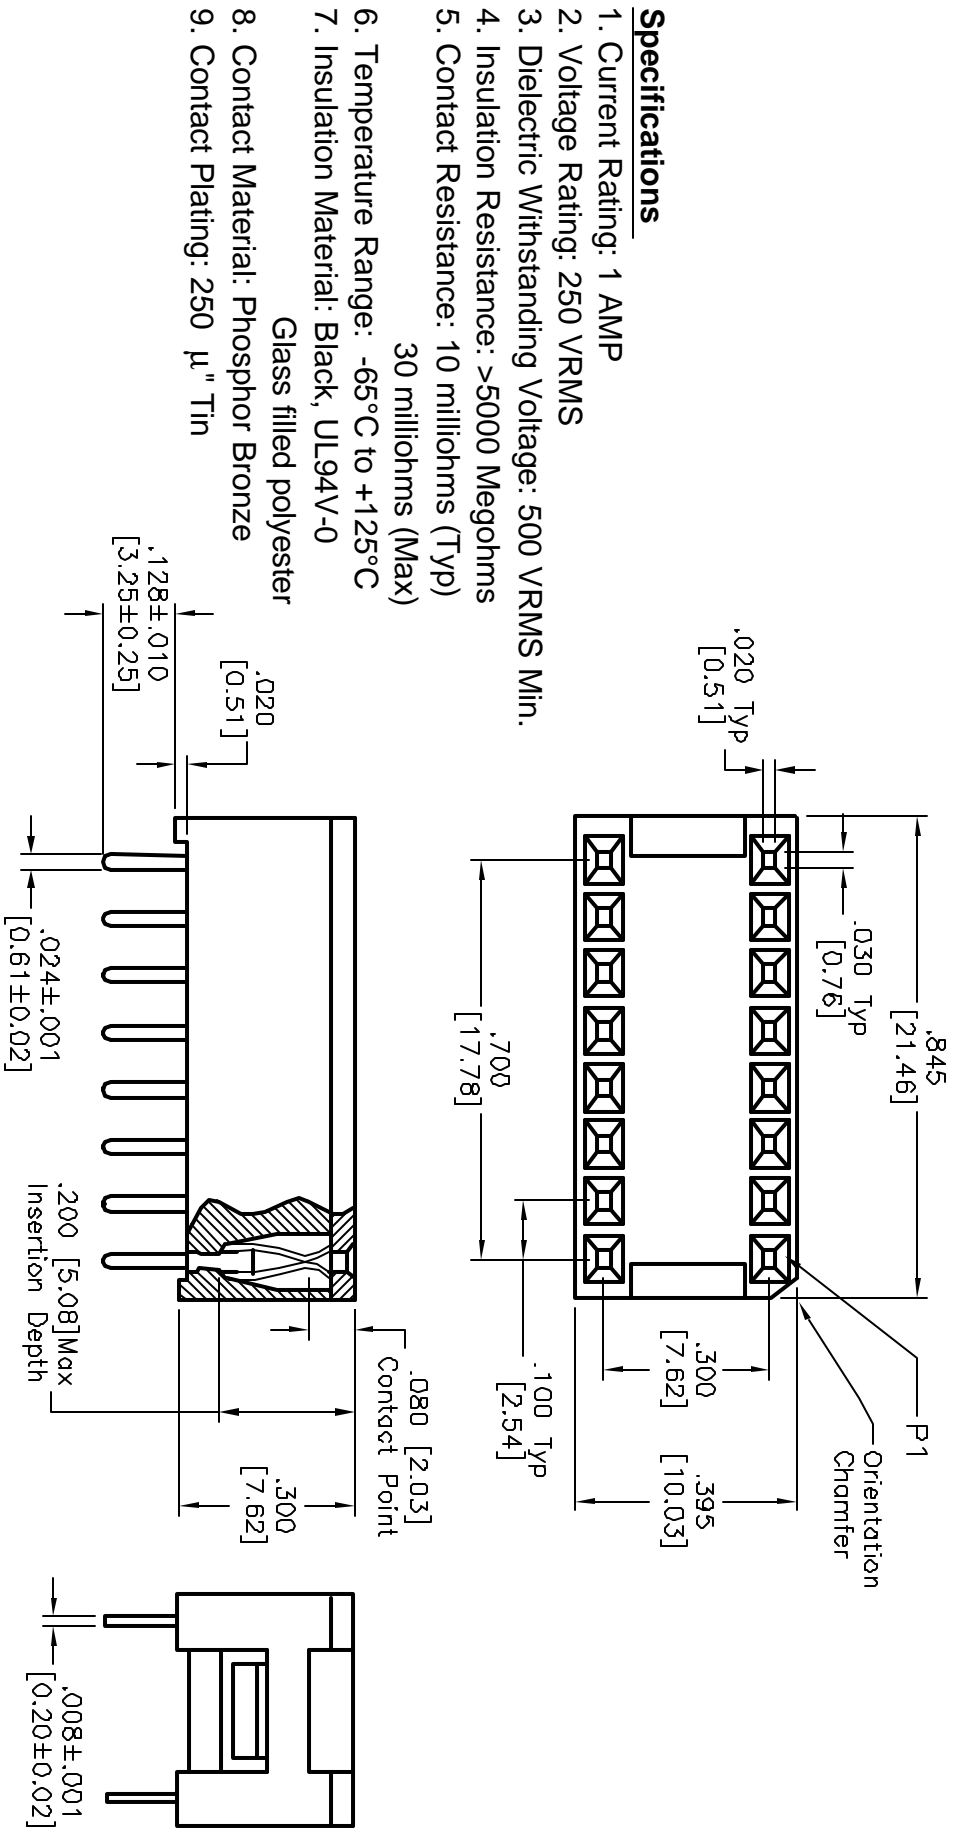

Specifications

1. Current Rating: 1 AMP
2. Voltage Rating: 250 VRMS
3. Dielectric Withstanding Voltage: 500 VRMS Min.
4. Insulation Resistance: >5000 Megohms
5. Contact Resistance: 10 milliohms (Typ)
30 milliohms (Max)
6. Temperature Range: -65°C to +125°C
7. Insulation Material: Black, UL94V-0
Glass filled polyester
8. Contact Material: Phosphor Bronze
9. Contact Plating: 250 μ" Tin

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	01/04/02
CHECKED BY:	DATE:
Higham Odish	1/24/02
APPROVED BY:	DATE:
Daniel Carey	1/24/02



SPC TECHNOLOGY

DRAWING TITLE:
16 Position DIP Socket—.300 High — Solder Tail

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SP-16-2T	31N2923.dwg	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1