
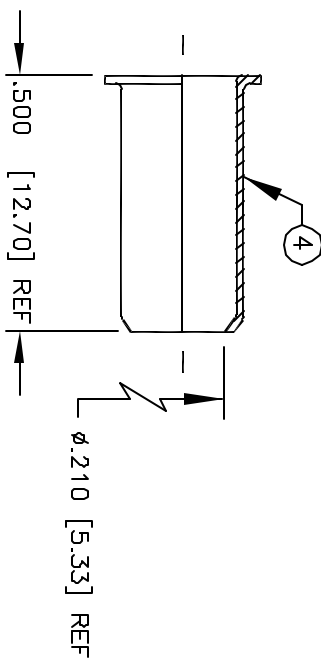


© COPYRIGHT 1998 BY SPC TECHNOLOGY. ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.


REVISIONS			DOC. NO.	Total Pages:	
DCP #	REV	DESCRIPTION	SPC-F005	2	2
129	A	RELEASED	Effective: 7/15/97, DCP No. 229	Supersedes DCP No. 103	
			DATE	CHECKD	DATE
			DJC	JC	JMM
			7/6/98	7/6/98	7/7/98

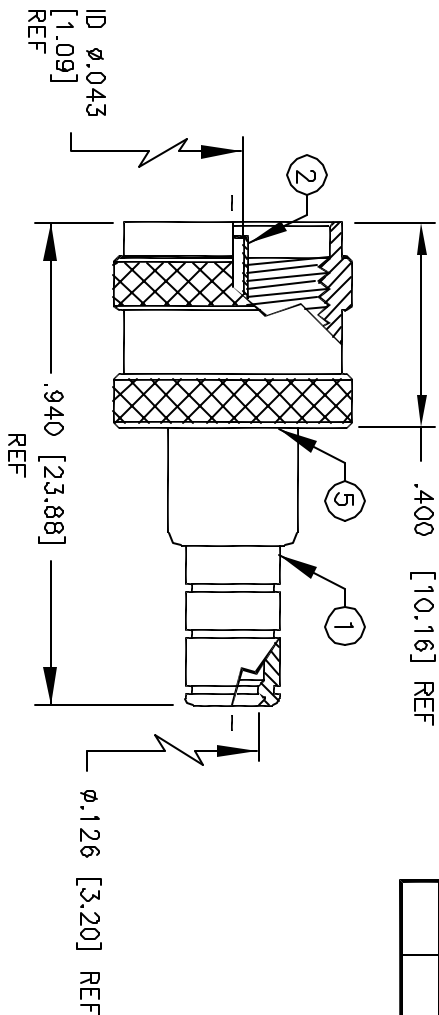

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 335 VRMS @ SEA LEVEL
 FREQUENCY RANGE: 0-2.5 GHz
 INSERTION LOSS: ≤ -.2 dB @ 2 GHz
 VSWR MAX: 1.25:1 @ 2 GHz
 FOR RG-58, 58A, 58C, 141, 141A, 400/U, BELDEN 8219,
 8240, 8259, 8262, 9201, 9203, 9310, 9311,
 COMM/SCOPE 0268 & CUSHCRAFT ULTRALINK TL92463E

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
5	SHELL	1	BRASS	NICKEL
4	FERRULE	1	COPPER TUBING	NICKEL
3	DIELECTRIC	1	DELTRIN	NONE
2	CONTACT	1	BRASS	GOLD
1	BODY	1	BRASS	NICKEL

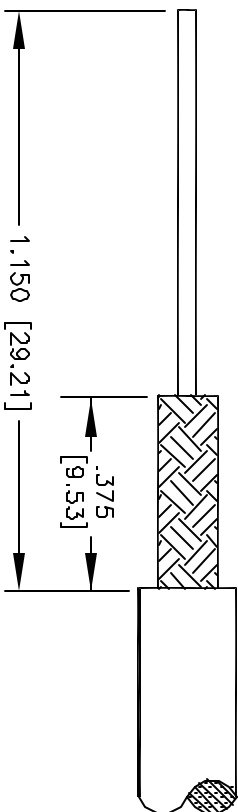

SUGGESTED CRIMP DIES: .052 & .213
 SUGGESTED STRIPPING INSTRUCTIONS

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

UNLESS OTHERWISE

SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWING TITLE:

MINI UHF MALE CRIMP

DRAWN BY:

DANIEL CAREY

DATE:

7/6/98

CHECKED BY:

JOHN COLE

DATE:

7/6/98

APPROVED BY:

JEFF MCVICKER

DATE:

7/7/98

DRAWING TITLE:

MINI UHF MALE CRIMP

SIZE DWG. NO.

A 1507

ELECTRONIC FILE

92N3353.DWG

REV

A