

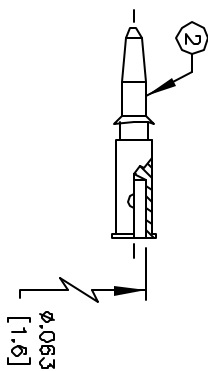


© COPYRIGHT 1998 BY SPC TECHNOLOGY. ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.


REVISIONS		DOC. NO. SPC-FD05, Total Pages: 2
DCP #	REV	Effective: 7/15/97, DCP No. 229 Supercedes DCP No. 103
129	A	
DESCRIPTION	RELEASED	
DRAWN	DATE	CHECKD
DJC	3/11/98	JC
DATE	7/15/98	APPRVD
		JMM
		DATE
		7/15/98

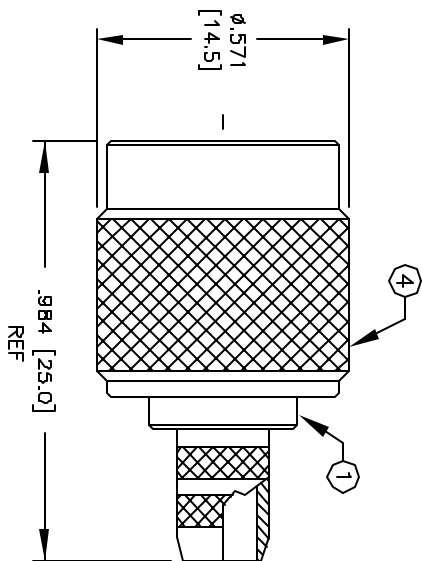

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 WORKING VOLTAGE: 500 VRMS @ SEA LEVEL
 FREQUENCY RANGE: 0-7 GHz
 INSERTION LOSS: ≤ -2 dB @ 3 GHz
 VSWR MAX: 1.3:1 @ 3 GHz
 FOR RG-8/X & 30/U, BELDEN 9258, MAXRAD MBX-100 & MBX-1000, MICRO 8/U, REMEE 1600, SXTON 8315 & TIMES LMR-240 & LMR-240 ULTRAFLEX CABLE

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
7	FERRULE	1	BRASS	NICKEL
6	RETAINING RING	1	BRASS	NONE
5	GASKET	1	S.I. RUBBER	RED
4	SHELL	1	BRASS	NICKEL
3	DIELECTRIC	1	DELTRIN	NONE
2	PIN	1	BRASS	GOLD
1	BODY	1	BRASS	NICKEL

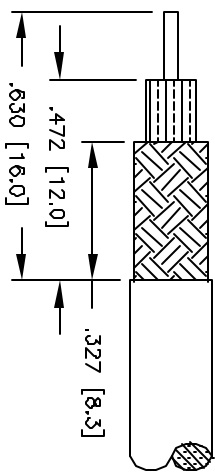

SUGGESTED STRIPPING INSTRUCTIONS
 SUGGESTED CRIMP DIES: .068 & .213

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWING TITLE:

TNC MALE CRIMP

DRAWN BY:	DATE:
DANIEL CAREY	3/11/98
CHECKED BY:	DATE:
JOHN COLE	7/15/98
APPROVED BY:	DATE:
JEFF MCVICKER	7/15/98

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	1539	92N3385.DWG	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1