
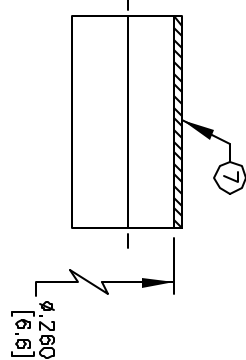



© COPYRIGHT 1998 BY SPC TECHNOLOGY. ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.


REVISIONS		DOC. NO.	Total Pages:	
DWG #	REV	SPC-F005	2	2
129	A	Effective: 7/15/97, DCP No. 229	Supersedes DCP No. 103	
DESCRIPTION	RELEASED	DATE	CHECKD	DATE
		3/11/98	JC	3/13/98
				7/7/98

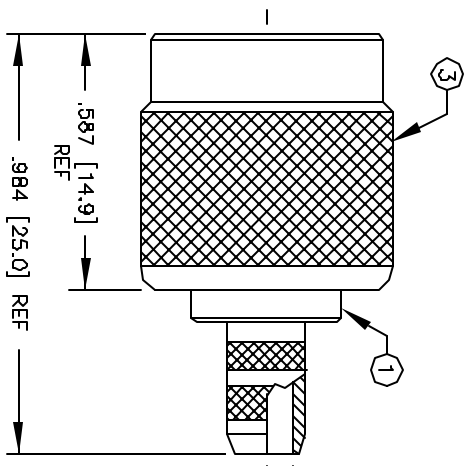

**SPECIFICATIONS:**

IMPEDANCE: 75 OHMS  
 WORKING VOLTAGE: 500 VRMS @ SEA LEVEL  
 FREQUENCY RANGE: 0-1 GHz  
 FOR RG-59, 59A, 59B, 62, 62A, 62C 71, 140 & 210/U,  
 BELDEN 8221, 8241, 8241A, 8254, 8255, 8263, 9189,  
 9204, 9228, 9244, 9269 & 9862 CABLE

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
9	RING	1	DELIRIN	NONE
8	WASHER	1	BRASS	NICKEL
7	FERRULE	1	BRASS	NICKEL
6	RETAINING RING	1	BRASS	NONE
5	GASKET	1	S.I. RUBBER	RED
4	DIELECTRIC	1	DELIRIN	NONE
3	SHELL	1	BRASS	NICKEL
2	PIN	1	BRASS	GOLD
1	BODY	1	BRASS	NICKEL

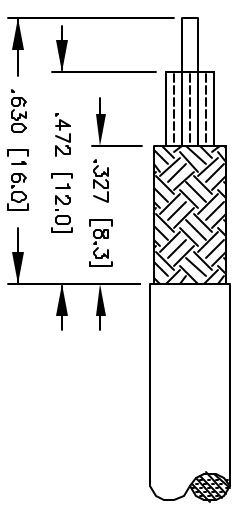

SUGGESTED STRIPPING INSTRUCTIONS  
 SUGGESTED CRIMP DIES: .068 & .255

**DISCLAIMER**  
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



**SPC TECHNOLOGY**

DRAWING TITLE: **TNC MALE CRIMP**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY: DANIEL CAREY  
 CHECKED BY: JOHN COLE  
 APPROVED BY: JEFF MCVICKER

DATE: 3/11/98  
 DATE: 3/13/98  
 DATE: 7/7/98

SIZE DWG. NO. **A 1544** ELECTRONIC FILE **92N3390.DWG** REV **A**

SCALE: NTS U.O.M.: INCHES [mm] SHEET: 1 OF 1