


GSD

1705-14

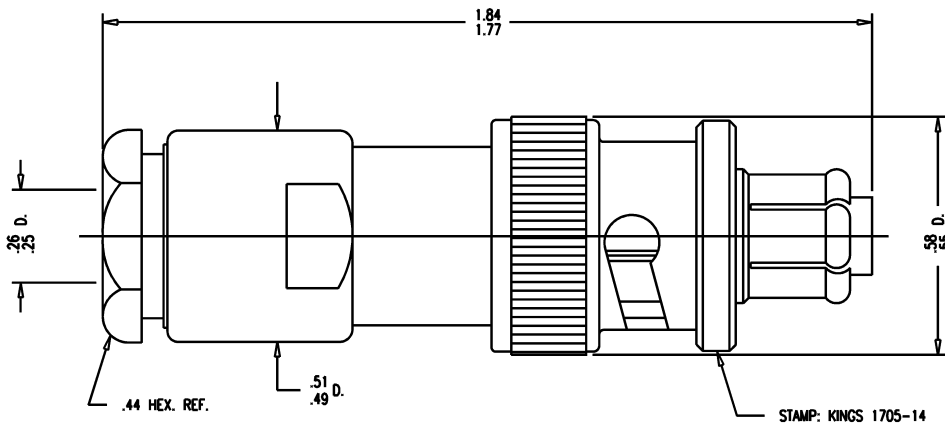

NOTES:

1. FOR USE WITH RG-59, 62 & 210/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-1001.3.
3. MATERIALS:
  - INSULATOR-TEFLON, ASTM-D-1457
  - GASKETS-SILICONE RUBBER, ZZ-R-765
  - OUTER CONTACT } BER. COP., ASTM-B-196
  - CENTER CONTACT }
  - SPRING WASHER }
  - ALL OTHER METAL PARTS-BRASS, ASTM-B16
4. FINISHES:
  - SPRING WASHER- SILVER PLATE PER QQ-S-365
  - CENTER CONTACTS-GOLD PLATE PER MIL-G-45204
  - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT FINISH (TR-5)
5. ELECTRICAL CHARACTERISTICS:
  - NOMINAL IMPEDANCE-NON-CONSTANT
  - WORKING VOLTAGE-3500 VRMS

REVISIONS	
ISSUE	CHANGES
JCA3242	
SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
PLUG, SHV	
DRAWN JCA	DATE 10/14/92
DESIGN MJB	DATE 10/14/92
APPR.	DATE
 <b>KINGS</b> <small>ELECTRONICS CO., INC.  TUCKAHOE, NEW YORK 10707</small>	
1705-14	

GSD