


SD

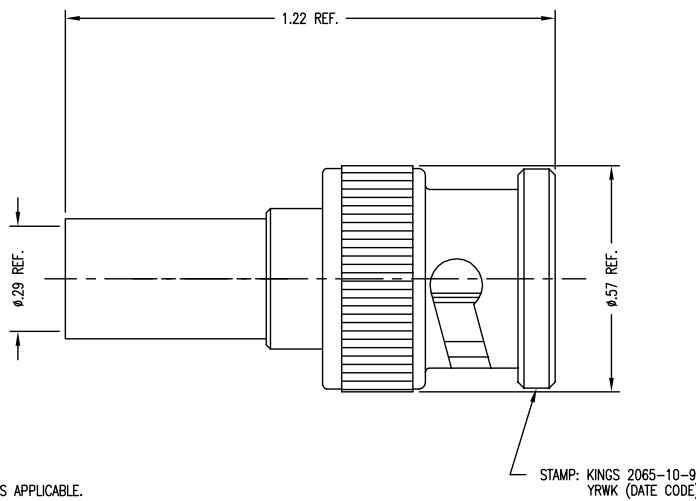

NOTES:

1. FOR USE WITH BELDEN 1694A CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-661-4
3. FOR CRIMPING USE DIE KTH-2325.
4. INTERFACE PER MIL-STD-34B, FIG 301.1, AS APPLICABLE.
5. MATERIALS:
 - INSULATOR-TEFLON, ASTM-D-4894
 - GASKET-SILICONE RUBBER, ZZ-R-765
 - SPRING WASHER } BER. COP., ASTM-B-196
 - OUTER CONTACT }
 - K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
 - ALL OTHER METAL PARTS-BRASS, ASTM-B16
6. FINISHES:
 - CENTER CONTACTS-GOLD PLATE PER MIL-G-45204
 - SPRING WASHER-SILVER PLATE PER QQ-S-365
 - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
7. MARK PACKAGE: KINGS 2065-10-9
8. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 75 OHMS
 - WORKING VOLTAGE: 500 VRMS
 - FREQUENCY RANGE: DC TO 6 GHz
 - RETURN LOSS: UP TO 1.5GHz, <-30dB
 - UP TO 3.0GHz, <-22dB
 - UP TO 6.0GHz, <-18dB
9. COMPLIANT TO SMPTE 424M (3G-SDI) SPECIFICATION

STAMP: KINGS 2065-10-9
YRWK (DATE CODE)

SD

2065-10-9 SD

REVISIONS		
ISSUE	CHANGES	
0	ER 37747 DCT 12/18/98	
1	CN 37837 C TML 05/21/99	
2	CN 37933 D TML 11/09/99	
3	CN 38011 D HVN 05/23/00	
4	CN 38027 E TML 07/07/00	
5	CN 38495 E TML 02/01/02	
6	CN 38637 E TML 08/22/02	
H	ER 14183 PSM 03/09/09	
	ER 22156 DW 03/02/10	
2065109S		
SCALE 4:1		
APPROX SURFACE AREA		
WAS: E-19649		
USED ON		
REF:		
PL, 75 BNC		
DRAWN	M/RM	DATE 04/15/98
DESIGN	LJ	DATE 04/15/98
APPR:		DATE
		B SIZE
by WINCHESTER <small>Winchester Electronics 82 Barnes Industrial Road North Winsted, CT 06492</small>		
2065-10-9		