

FEATURES:

- Connector accepts cable types RG/U: 58, 58A, 58C, 141, 141A, 142, 142A, 142B, 223
- Meets interface requirements of MIL-STD-348

MATERIALS:

Body and Fittings – Brass
Outer Contact – Brass
Center Contact – Gold Plated Brass
Dielectric – PTFE
Gasket – Silicone Rubber

Finish:

Body – Tarnish Resistant
Outer Contact – Tarnish Resistant
Center Contact – Gold Plated

Marking: POMONA 4488

RATINGS:

Operating Voltage: 500 VRMS

Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 4488

All dimensions are in inches. Tolerances (except noted): .xx = ± 0.02 " (.51 mm), .xxx = ± 0.005 " (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Made in USA

6/9/99

SY/EH/LS

S:\Engineering\Release\DataSheets\FIukeDataSheet\AI_4488_2_01.doc

Sales: 800-490-2361 Fax: 888-403-3360

Technical Assistance: 800-241-2060

PomonaACCESS 90101 (800) 444-6785 or (425) 446-6010

More drawings available at www.pomonaelectronics.com

Page 1 of 2

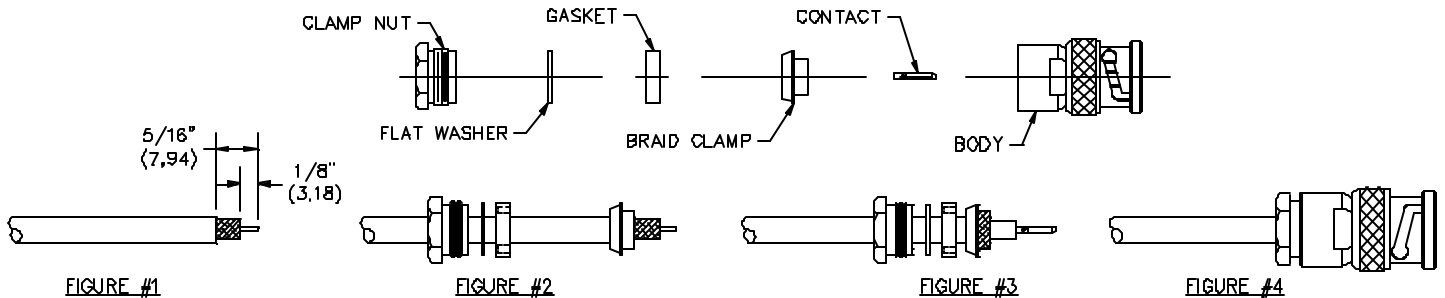


FIGURE #1

A. Strip cable jacket and dielectric to dimensions shown.

FIGURE #2

B. Slide clamp nut, flat washer and gasket over end of cable.

C. Fray cable braid and slide braid clamp over end of cable flush with end of cable jacket.

FIGURE #3

D. Solder or crimp contact onto center conductor.

E. Fold braid back over braid clamp and trim even with braid clamp.

FIGURE #4

F. Slide clamp nut, flat washer and gasket forward against braid clamp.

G. Thread body onto clamp nut and tighten 35-40 inch-pounds.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

6/9/99

SY/EH/LS

S:\Engineering\Release\DataSheets\FIukeDataSheetd_AI_4488_2_01.doc

Sales: 800-490-2361 Fax: 888-403-3360

Technical Assistance: 800-241-2060

PomonaACCESS 90101 (800) 444-6785 or (425) 446-6010

More drawings available at www.pomonaelectronics.com

Page 2 of 2