

RED INDICATES ORIGINAL


ALL CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF TROMPETER ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED FOR REPRODUCTION IN ANY MANNER WITHOUT EXPRESS WRITTEN PERMISSION.

REV		ED	DESCRIPTION	DWN	APPROVED	DATE
U	12815		CHANGED BOM ON -307; SEE ECO	R L	<i>[Signature]</i>	4/28/99

DASH NO	CABLES ACCOMMODATED	A HEX	B DIM	C MAX	ASSEMBLY PER
-201	M17/176-00002				
-202	TWC-78-1				
-203	TWC-124-1A				
-204	10802, RAYCHEM			1.80	TAI-166
-205	TWAC-78-1F2				
-206	78280130, RAYCHEM				
-207	83910, BELDEN				
-208	202-3927, MICRRODOT				
-209	202-3942, MICRRODOT				
-210	8451, BELDEN				
-211	202-3934, MICRRODOT				
-212	252460114, RAYCHEM				
-213	TWC-78-2			1.55	TAI-138
-214	TWC-124-2				
-215	BL982, TIMES				
-216	BL1242, TIMES				
-217	GC875T24H, GRUMMAN	.344	.030		
-218	EDP22188B, RAYCHEM				
-219	252801114, RAYCHEM				
-220	GC875SR1, GRUMMAN				TAI-166
-221	10814, RAYCHEM				
-222	10813, RAYCHEM				
-223	HMS2-1149, HUGHES				
-301	GC875QC1, GRUMMAN				
-302	GC875GB1, GRUMMAN			1.80	TAI-166
-303	7528A514, RAYCHEM				
-304					
-305	M17/177-00001 THERMATICS				
-306	TRC-50-2				TAI-218
-307	M17/134-00002				
-307	TRC-75-1				TAI-188
-308	TRC-75-2				TAI-218
-309	TRC-50-1				TAI-188

DASH NO	KEYING LETTER	D DEGREES	E DEGREES	F DEGREES	COLOR BAND
-1	T	100°	150°	110°	RED
-2	U	120°	130°	110°	ORANGE
-3	V	115°	130°	115°	YELLOW
-4	W	125°	110°	125°	GREEN
-5	X	130°	100°	130°	BLUE
-6	Y	110°	140°	110°	VIOLET
-7	Z	100°	150°	100°	GRAY
-8	S	135°	135°	90°	WHITE
-9	NONE	120°	120°	120°	NONE

INCH	MM
.005	0.13
.010	0.25
.030	0.76
.344	8.74
.548	13.97
1.00	25.40
1.25	31.75
1.418	35.97
1.55	39.37
1.75	44.45
1.80	45.72

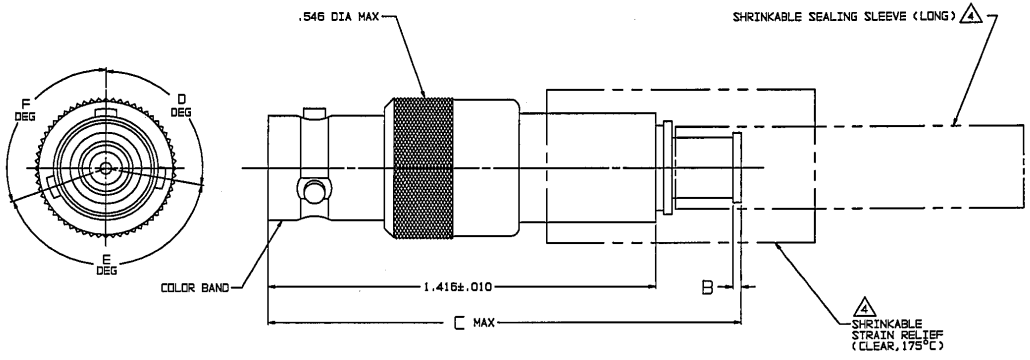

- 6. FOR TOOL CRIMP CONNECTOR QUALIFIED TO MIL-C-48142, SEE DRAWING 3-0298 (CJ70MC)
- 5. EXAMPLE OF COMPLETE MODEL NO.

CJ70C	T	-201
BASIC MODEL NO.		DASH NO (TABLE 1)
POLARIZATION LETTER		
NONE READ FOR STD POLARIZATION (SEE TABLE 2)		

- 1 SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LOOSE AS FOLLOWS:
 - a. CABLE GROUPS -201 THROUGH -210, -217 THROUGH -303, -305, -307 & -309
 - 1 SHRINKABLE STRAIN RELIEF (1.00 LONG)
 - 1 SHRINKABLE SEALING SLEEVE (1.25 LONG)
 - b. CABLE GROUPS -211 THROUGH -216, -306 & -308
 - 1 SHRINKABLE STRAIN RELIEF (1.75 LONG)
- 3. 3-LUG CONCENTRIC TWINAX/TRIAX TRB, FULL CRIMP CABLE RECEPTACLE
- 2. FINISH: TFS-1A (NICKEL)
- 1. ALL DIMENSIONS ARE IN INCHES



QTY	DESCRIPTION	PART NUMBER	ITEM
TOL UNLESS SPECIFIED XXX ± .005 UNLESS	TROMPETER ELECTRONICS, INC.	CJ70C	MINIAXIALS
DWN	M17/134-00002	MATERIAL	CODE IDENT
CHK	14949	14949	3-0209
ENGR		DRAWING NO.	REV
APPR		3-0209	U
NEXT ASSY	SCALE 4/1	DATE 11/11/88	SHEET 1C