




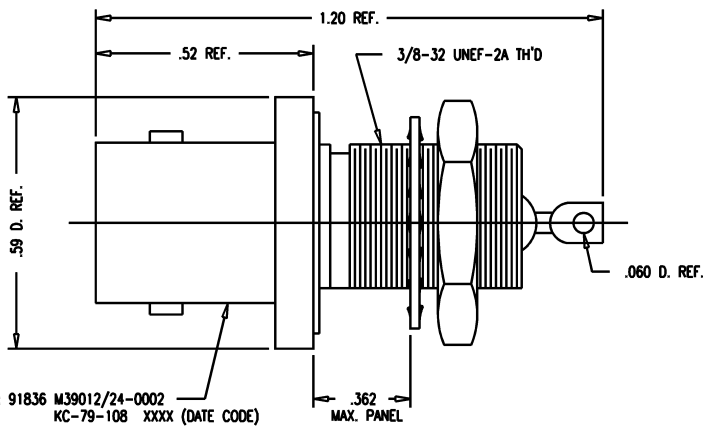
GSD

M39012/24-0002

REVISIONS	
ISSUE	CHANGES
4	CN 26686 E MJB 9JAN85
5	CN 32297 A LNM 06/15/90

ARJ0147

SCALE 4:1	
APPROX SURFACE AREA	
KC-79-108	
USED ON	
REF:	
BNC BULKHEAD RECEPTACLE (HERMETIC SEALED)	
DRWNN	AJ
DATE	12/01/89
DESIGN	MJB
DATE	12/05/89
APPR.	
DATE	
 KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	
M39012/24-0002	



STAMP: 91836 M39012/24-0002
KC-79-108 XXXX (DATE CODE)

- NOTES:**
- INTERFACE PER MIL-STD-348, FIGURE 301-2.
 - MATERIALS:**
 INSULATOR: TEFLON, ASTM-D-4894
 GASKET: SIL. RUBBER, ZZ-R-765
 LOCKWASHER: PHOS. BRONZE, ASTM-B-103
 CONTACT: BER. COPPER, ASTM-B-196
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
 - FINISHES:**
 CENTER CONTACT: GOLD PLATE PER MIL-G-45204
 GLASS TERMINAL: TIN PLATE PER MIL-T-10727
 ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
 - ELECTRICAL CHARACTERISTICS:**
 NOMINAL IMPEDANCE: 50 ~W
 FREQUENCY RANGE: DC TO 11 GHz
 WORKING VOLTAGE: 500 VOLTS RMS
 - ENVIRONMENTAL:**
 LEAKAGE RATE SHALL NOT EXCEED 1×10^{-7} cc/sec OF
 TRACER GAS AT ATMOSPHERIC PRESSURE.

GSD