

NOTES:



4. SAME AS M39012/21-0002, KC-79-106 EXCEPT FOR FINISH.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & .010 DECIMALS ± .004 ANGLES ± 0° 30' T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED THE SUM OF THEIR TOLERANCES.

2. REMOVE ALL BURRS. BREAK SHARP EDGES .003 MAX. NO FILLETS PERMITTED.

3. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX. ALL DIMENSIONS PRIOR TO PLATING.

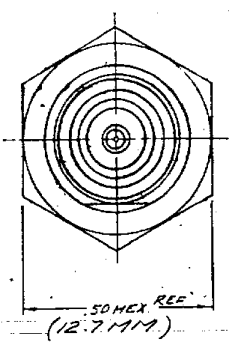

S.D.

KC-79-131

REVISIONS	
ISSUE	CHANGES
0	ER 9072 C.C. 7 DEC 70
1	CN 14979 A JA 28 JUL 75
2	CN 14568 C GA 29 JUN 75
3	CN 19256 C GME 17 FEB 80
4	CN 21551 C KOR 21 JAN 81

S-D

S.D.

ITEM	QTY	DESCRIPTION	DWG. NO.
7	1	BNC CONTACT ASSEMBLY	
6	1	HEX NUT	708-4-MOG
5	1	LOCK WASHER	C-71-05-7-MOG
2	1	INSULATOR	
1	1	BODY	

FINISH	
SPEC	KER-10004
MATL	
SPEC	
BNC BULKHEAD RECEPTACLE	
DRAWN	C.C. DATE 3 DEC 70
APPR	XC DATE 12-7-70
KINGS ELECTRONICS 48 HARBORLEA ROAD TUCKAHOE, N.Y.	
KC-79-131	