

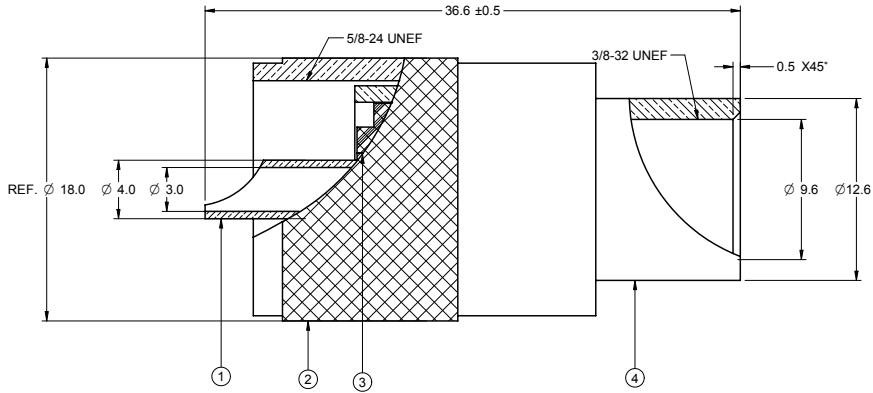


5	4	3	2	1
PART NUMBER	ITEM ① CONTACT	ITEM ② NUT	ITEM ③ INSULATOR	ITEM ④ BODY
25-7300	BRASS GOLD PLATED	BRASS NICKEL PLATED	DELTRIN	BRASS NICKEL PLATED

DRAWING NO. 25-7300				
REVISIONS				
RELEASE FOR QUOTATION				
A	11-10-05	W	W	T
ADD NOTES 4 & 5				
B	10-31-06	Y	L	T
CHANGE DIM. $\phi 12.4$ TO $\phi 12.6$ ADD DIM. $\phi 3.2$ Ref. $\phi 18.0, 0.5 \times 45^\circ$ DEL. DIM. $\phi 17.3$				
C	11-28-06	Z	V	T



NOTES:

- ELECTRICAL SPECIFICATIONS**
 IMPEDANCE: NON-CONSTANT
 FREQUENCY RANGE: 0-500 MHz
 WORKING VOLTAGE: 500 VRMS MAX AT SEA LEVEL
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS MAX AT SEA LEVEL
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM
- MECHANICAL SPECIFICATIONS**
 DURABILITY: 500 CYCLES
 CABLE RETENTION: 20 LBS, RG-8, RG-213 CABLE
- ENVIRONMENTAL SPECIFICATIONS**
 RECOMMENDED TEMPERATURE RANGE: -55 °C TO +85 °C
- PRODUCT SHOULD BE RoHS COMPLIANCE
- PACKAGING REQUIREMENT FOLLOWS ENGINEERING DOCUMENT P/N 836-40200001XX.

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN BY GARY.ZHG	DATE 11-28-06	EMERSON Network Power Connectivity Solutions
DECIMALS	CHECKED BY BETTY.YU	DATE 11-28-06	
X	APPROVED BY THOMAS	DATE 11-28-06	
X.X	U/M	mm	
X.XX			
ANGLES			
THIS DRAWING WAS PRODUCED BY COMPUTER. DO NOT SCALE DRAWING OR UPDATE MANUALLY.			TITLE PL 259 MALE SOLDER UHF 20 LBS, RG8, RG213
SHEET 1 OF 1	DRAWING NO. 25-7300	SIZE C	

5

4

3

2

1