

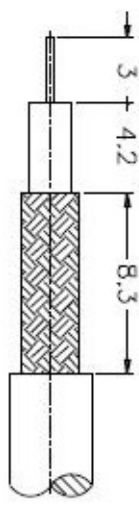
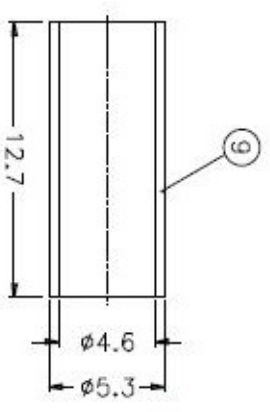


1	REVISIONS
2	DESCRIPTION PER REQUEST\DATE
3	
4	
5	
6	
7	
8	

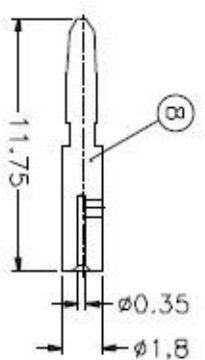

RECOMMENDED
CABLE STRIPPING DIM'S

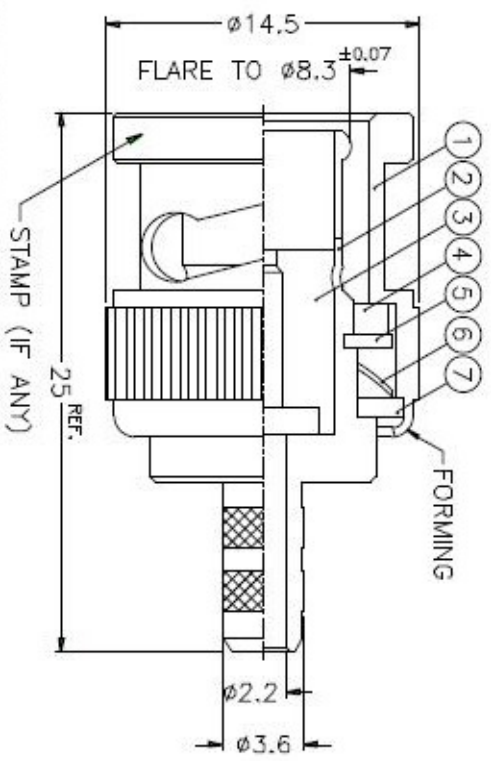

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. BRASS PER QQ-B-613
 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
 5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 6. PTFE MIL-P-19468

1. CRIMPED FERRULE
 HEX CRIMP SIZE .18"
 2. CRIMPED CONTACT PIN
 HEX CRIMP SIZE .055"/.06"

9	FERRULE	COPPER	NOTE 3	1	FR-53/46X127C				
8	CONTACT PIN	NOTE 1	NOTE 5	1	B1121A9-003-8				
7	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08				
6	SPRING	SK5	NOTE 4	1	B50000-6				
5	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5				
4	GASKET	RUBBER	RED	1	GS-115/8X15				
3	INSULATOR	NOTE 6	NATURAL	1	B1121A9-003-3T				
2	BODY	NOTE 1	NOTE 3	1	B50000-2-36/22				
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B				

DIMENSIONS ARE IN MILLIMETERS
 UNLESS OTHERWISE SPECIFIED
 TOLERANCES
 0.5-6 = ±0.2
 6-30 = ±0.4
 30-120 = ±0.6
 120-315 = ±1
 315-1000 = ±1.6
 1000-2000 = ±2.4

PART NO.	B1121A9-003-NT3G-75
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

TITLE
Amphenol
 BNC CRIMP PLUG
 (FOR BT3002 CABLE)
 DRAWING NO.
 KJ-B1121A9-003-NT3G-75
 ITEM NO.

1 2 3 4 5 6 7 8